CASIO

SH0402824A (英) Printed in Japan

fx-7500G OWNER'S MANUAL CASIO

# fx-7500G

# OWNER'S MANUAL

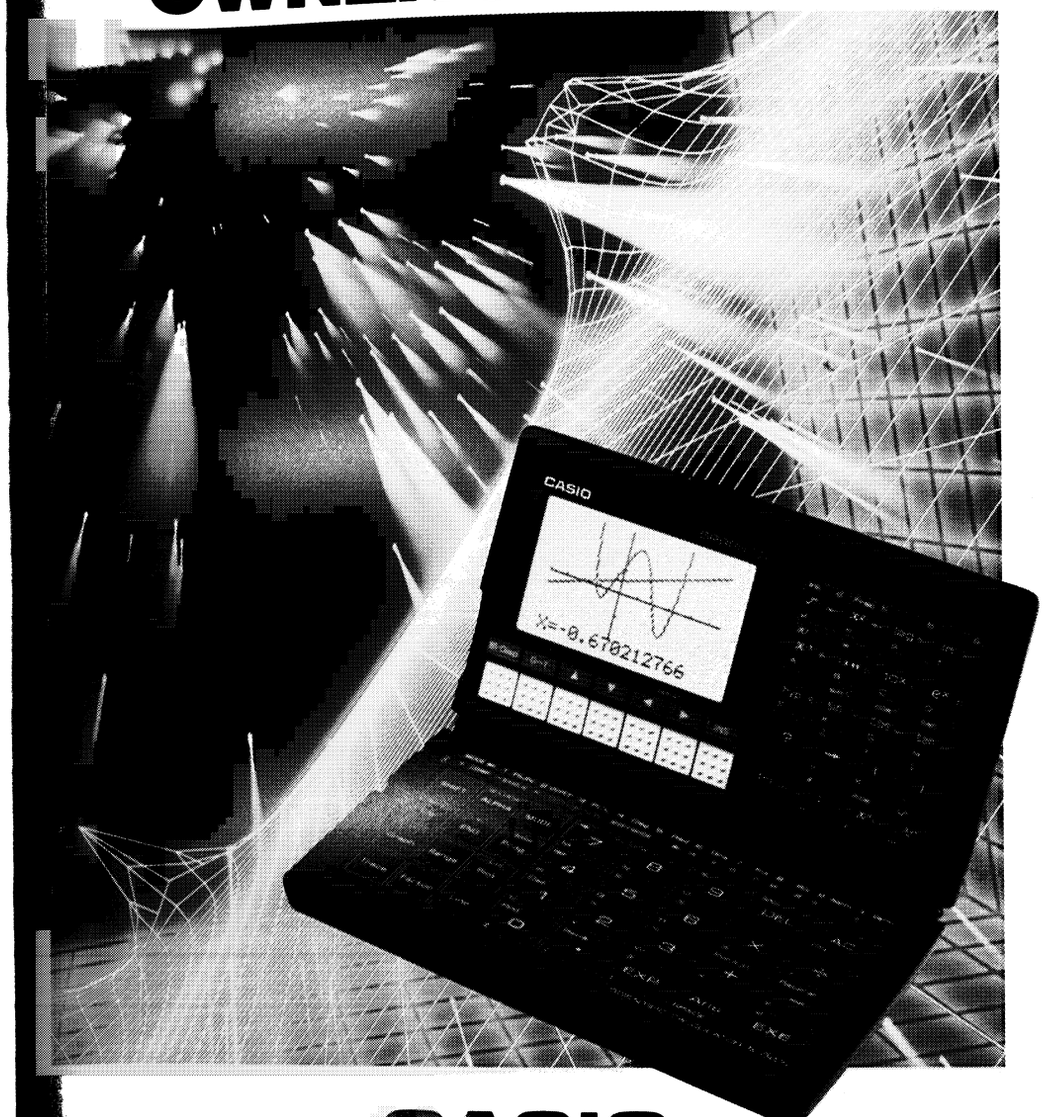


CASIO

(英)

# *fx-7500G*

# OWNER'S MANUAL

CASIO

- The information contained herein is subject to change without notice.
- Reproduction of this manual either in part or its entirety is forbidden.
- Note that the manufacturer assumes no responsibility for any injury or loss incurred while using this manual.
- Due to limitations imposed by printing processes, the displays shown in this manual are only approximations and may differ somewhat from actual displays.

# FOREWORD

Thank you for your purchase of the CASIO fx-7500G.
This unit is a totally new type of advanced programmable computer. Graph functions make it possible to produce a wide variety of useful graphs.
Manual computations can be easily performed following written formulas (true algebraic logic). A replay function is provided that allows confirmation or correction when key operation errors occur. Programs can also be input by following true algebraic logic, so repeat and/or complex computations are simplified.

This manual is composed of four sections:

1. Configuration and Operation
2. Manual Computations
3. Graphs
4. Program Computations

Section 1 should be read first to become familiar with the nomenclature, handling and cautions concerning this unit. Sections 2, 3 and 4 can then be read in order to master each type of functions through samples and explanations.

# CONTENTS


FOREWORD ..... i

HANDLING PRECAUTIONS ..... vi

1. CONFIGURATION AND OPERATION ..... 1

1-1 NOMENCLATURE AND FUNCTIONS ..... 2
Display window ..... 3
Power switch ..... 3
Special operation keys ..... 3
Numeric/Decimal point/Exponent input keys ..... 7
Computation keys ..... 7
Graph keys ..... 8
Function keys ..... 8
Adjusting the display contrast ..... 12

1-2 POWER AND BATTERY REPLACEMENT ..... 13
Auto power off function ..... 14

1-3 BEFORE BEGINNING COMPUTATIONS ..... 15
Computation priority sequence ..... 15
Number of stacks ..... 16
Computation modes ..... 17
Number of input/output digits and computation digits ..... 18
Overflow and errors ..... 19
Number of input characters ..... 20
Graphic and text displays ..... 20
Display registers ..... 21
Corrections ..... 22
Memory ..... 23
Memory expansion ..... 24
Answer (Ans) function ..... 25

2. MANUAL COMPUTATIONS ..... 27

2-1 BASIC COMPUTATIONS ..... 28
Arithmetic operations ..... 28
Parenthesis computations ..... 29
Memory computations ..... 30
Specifying the number of decimal places, the number of significant digits and the exponent display ..... 31





2-2 SPECIAL FUNCTIONS ..... 33
Continuous computation function ..... 33
Replay function ..... 34
Multistatement function ..... 36

2-3 FUNCTIONAL COMPUTATIONS ..... 37
Angular measurement units ..... 37
Trigonometric functions and inverse trigonometric functions ..... 38
Logarithmic and exponential functions ..... 39
Hyperbolic functions and inverse hyperbolic functions ..... 40
Coordinate transformation ..... 41
Other functions ..... 42

2-4 BINARY, OCTAL, DECIMAL, HEXADECIMAL COMPUTATIONS ..... 44
Binary, octal, decimal, hexadecimal conversions ..... 45
Negative expressions ..... 46
Basic arithmetic operations using binary, octal, decimal and hexadecimal values ..... 46
Logical operations ..... 47

2-5 STATISTICAL COMPUTATIONS ..... 48
Standard deviation ..... 48
Regression computation ..... 50
Linear regression ..... 51
Logarithmic regression ..... 52
Exponential regression ..... 53
Power regression ..... 54

3. GRAPHS ..... 55

3-1 BUILT-IN FUNCTION GRAPHS ..... 57
Overwriting built-in function graphs ..... 58

3-2 USER GENERATED GRAPHS ..... 59
Ranges ..... 59
User generated function graphs ..... 64
Function graph overwrite ..... 64
Trace function ..... 65
Plot function ..... 68
Line function ..... 71
Factor function ..... 73
Instant factor function ..... 77

3-3 GRAPH FUNCTION APPLICATIONS ..... 79
3-4 SINGLE VARIABLE STATISTICAL GRAPHS ..... 82
Drawing single variable statistical graphs ..... 82
Summary ..... 85
3-5 PAIRED VARIABLE STATISTICAL GRAPHS ..... 86
Drawing paired variable statistical graphs ..... 86

4. PROGRAM COMPUTATIONS ..... 89

4-1 WHAT IS A PROGRAM? ..... 90
Formulas ..... 90
Programming ..... 90
Program storage ..... 91
Program execution ..... 93
4-2 PROGRAM CHECKING AND EDITING (CORRECTION, ADDITION, DELETION) ..... 97
Formulas ..... 97
Programming ..... 97
Program editing ..... 98
Program execution ..... 99
Summary ..... 102
4-3 PROGRAM DEBUGGING (CORRECTING ERRORS) ..... 103
Debugging when an error message is generated ..... 103
Error messages ..... 103
Checkpoints for each type of error ..... 104
4-4 COUNTING THE NUMBER OF STEPS ..... 106
4-5 PROGRAM AREAS AND COMPUTATION MODES ..... 108
Program area and computation mode specification in the WRT mode ..... 108
Cautions concerning the computation modes ..... 110
4-6 ERASING PROGRAMS ..... 111
Erasing a single program ..... 111
Erasing all programs ..... 112
4-7 CONVENIENT PROGRAM COMMANDS ..... 113
Jump commands ..... 113
Unconditional jump ..... 113
Conditional jump ..... 115



Count jump ..... 117
Summary ..... 119
Subroutines ..... 119
Carriage return function ..... 122
4-8 ARRAY-TYPE MEMORIES ..... 124
Using array-type memories ..... 124
Cautions when using array-type memories ..... 125
Application of the array-type memories ..... 127
4-9 DISPLAYING ALPHA-NUMERIC CHARACTERS AND SYMBOLS ..... 129
Alpha-numeric characters and symbols ..... 129
4-10 USING THE GRAPH FUNCTION IN PROGRAMS ..... 132

PROGRAM LIBRARY ..... 135

Prime factor analysis ..... 136
Greatest common measure ..... 138
Definite integrals using Simpson's rule ..... 140
△↔Y transformation ..... 142
Minimum loss matching ..... 144
Cantilever under concentrated load ..... 146
Parabolic movement ..... 148
Normal distribution ..... 150
Circle and points of tangency ..... 152
Rotation of figures ..... 160
Graph variation by parameters ..... 166
Hysteresis loop ..... 170
Regression curve ..... 174
Parade diagram ..... 182

REFERENCE MATERIAL ..... 191

Manual computations ..... 192
Program computations ..... 197
Error messages ..... 199
Input range of functions (general principles) ..... 201

SPECIFICATIONS ..... 203

## HANDLING PRECAUTIONS

- This unit is composed of precision electronic components and should never be disassembled. Do not drop it or otherwise subject it to sudden impacts or sudden temperature changes. Be especially careful to avoid storing the unit or leaving it in areas exposed to high temperature, humidity or large amounts of dust. When exposed to low temperatures, the unit will require more time to display answers and may even fail to operate. The display will return to normal once normal temperature is attained.
- Batteries should be replaced every 2 years even if the unit is not used for extended periods. Never leave dead batteries in the battery compartment. They can leak and cause damage to the unit.
- Avoid using volatile liquids such as thinner or benzine to clean the unit. Wipe the unit with a soft, dry cloth or a cloth that has been dipped in a neutral detergent solution and wrung out.
- If malfunction of the unit should occur, either bring or send the unit to your retailer or the nearest CASIO dealer.
  Be sure to clearly explain the problem in detail.
- Before assuming malfunction of the unit, be sure to carefully reread this manual and ensure that the problem is not due to insufficient battery power, programming or operational errors.



# 1.
# CONFIGURATION AND OPERATION

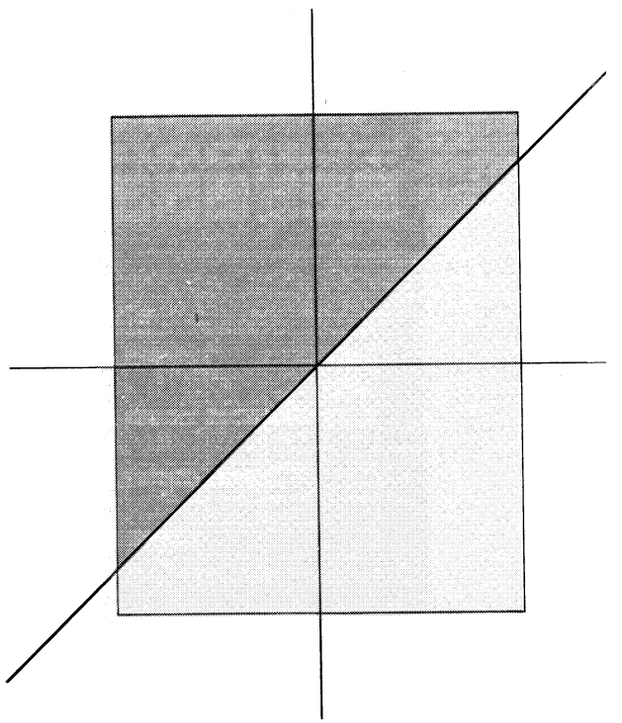

# 1-1 NOMENCLATURE AND FUNCTIONS

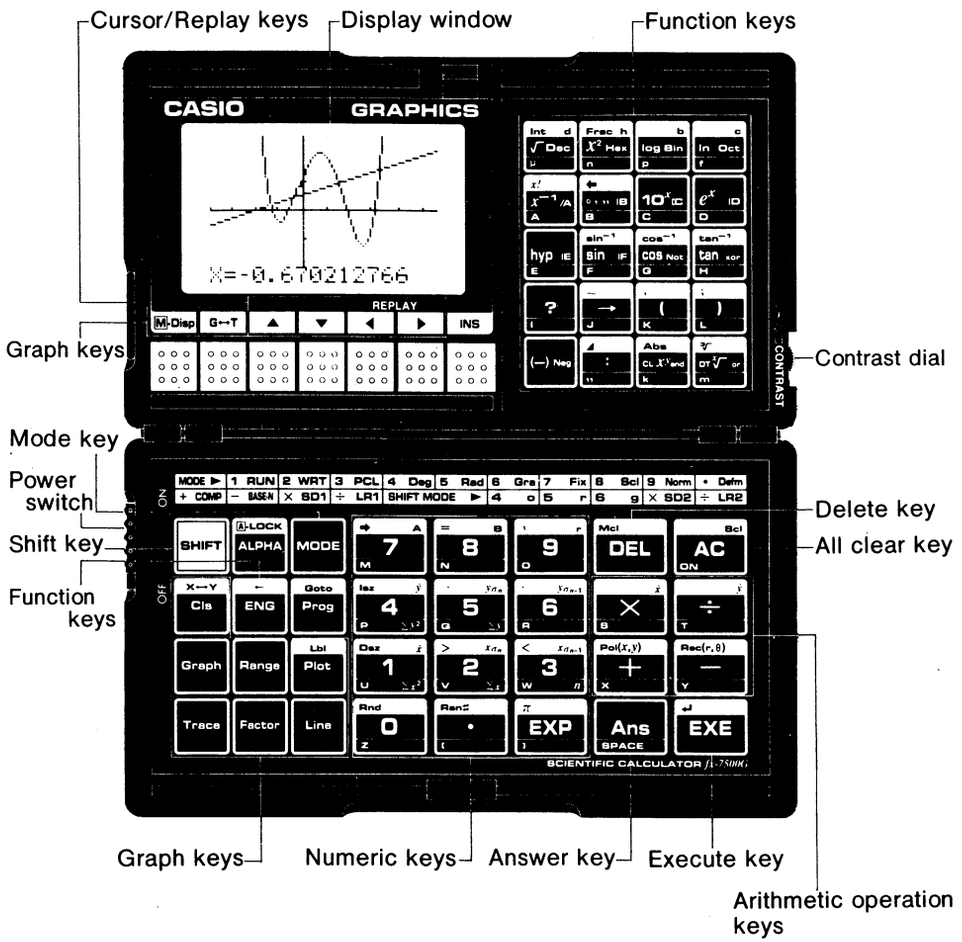




## ■ Display window






The display window is capable of displaying 16-character by 8-line text and symbols. Graphs are produced on a 95 by 63-dot matrix. A system display as shown on the left indicates the following: the system mode (sys mode), calculation mode (cal mode), angle unit (angle), number of decimal places or number of significant digits (display), and key input buffer status (Step).
The display on the right shows a sine graph as a representative example of the graphs.
The letter "O" is distinguished from zero by adding a slash for the zero (Ø).

## ■ Power switch

Power is turned ON by sliding the power switch up. Sliding the power switch down turns power OFF.

## ■ Special operation keys

### SHIFT Shift key

Press when using the funciton commands and functions marked on blue fields on the key panel. An [S] will blink on the display to indicate that [SHIFT] has been pressed. Pressing [SHIFT] again will cause the [S] to disappear from the display and the unit to return to the status it was in before [SHIFT] was originally pressed.

### MODE Mode Key

Press when setting the status of the unit or the unit of angular measurement.

MODE 1 ... For manual computations and program execution.
MODE 2 ... For writing or checking programs.
MODE 3 ... For clearing programs.
MODE 4 ... Deg displayed. If EXE is pressed, unit of angular measurement is specified as degress.
MODE 5 ... Rad displayed. If EXE is pressed, unit of angular measurement is specified as radians.
MODE 6 ... Gra displayed. If EXE is pressed, unit of angular measurement is specified as grads.
MODE 7 ... Fix displayed. Entering a value from 0 to 9 followed by EXE will specify the number of decimal places according to the value entered.
Ex. MODE 7 3 EXE → Three decimal places
MODE 8 ... Sci displayed. Entering a value from 0 to 9 followed by EXE will specify the number of significant digits from 1 to 10.
Ex. MODE 8 5 EXE → 5 significant digits
MODE 9 ... Norm displayed. Pressing EXE will cancel the specified number of decimal places or the specified number of significant digits.
MODE · ... Defm displayed. Entering a value followed by EXE will specify the number of memories available.
Ex. MODE · 1 0 EXE → Number of memories available increased by 10.
If EXE is pressed without entering a value, the current number of memories available and remaining steps will be displayed. (See page 24.)
Ex. MODE · EXE

```
**Defm**
 Program : 195
  Memory : 56
3571 Bytes Free
```

MODE + ... Specifies COMP mode for arithmetic computation or function computation (program execution possible).
MODE − ... For binary, octal or hexadecimal computations/conversions.



MODE × ... For standard deviation computations (SD1 mode).
MODE ÷ ... For regression computations (LR1 mode).
SHIFT MODE × ... For production of a bar graph, line graph or normal distribution curve according to single variable statistical data (SD2 mode).
SHIFT MODE ÷ ... For production of a regression line according to paired variable statistical data (LR2 mode).
SHIFT MODE 4 ... Pressed after a numeric value representing degrees is input.
SHIFT MODE 5 ... Pressed after a numeric value representing radians is input.
SHIFT MODE 6 ... Pressed after a numeric value representing grads is input.

## Alphabet key

Press to input alphabetic characters or special characters. Pressing ALPHA displays A and allows the input of only one character. After that, the unit returns to the status it was in before the ALPHA key was originally pressed. Pressing SHIFT followed by A-LOCK will lock the unit in this mode and allow consecutive input of alphabetic characters until ALPHA is pressed again.

| | | | |
|---|---|---|---|
| μ | n | p | f |
| A | B | C | D |
| E | F | G | H |
| I | J | K | L |
| | " | k | m |

| | | | | |
|---|---|---|---|---|
| M | N | O | | |
| P | Q | R | S | T |
| U | V | W | X | Y |
| Z | [ | ] | SPACE | |

## Program/Goto key

Press Prog, enter a value from 0 to 9 and then press EXE to execute a program.
Ex. Prog 1 EXE → Execution of Program 1 begins.
Pressing SHIFT followed by Goto (Prog key) will cause Goto to appear on the display. This is a jump command used in programs.

### [△] [▽] [◁] [▷] (REPLAY) Cursor/Replay keys

Press to move the cursor (blinking "_") left, right, up, and down on the display. The [◁] key moves the cursor to the left, [▷] moves the cursor to the right, [△] moves the cursor up, and [▽] moves the cursor down. Holding any of the keys down will cause the cursor to continuously move in the respective direction.

Once a formula or numeric value is input and [EXE] is pressed, the [◁] key and [▷] key become "replay" keys. In this case, pressing [▷] displays the formula or numeric value from the beginning, while pressing [◁] displays it from the end. This allows the formula to be executed again by changing the values.

Pressing the cursor key following [SHIFT] changes their functions to those marked above the keys.

### [INS] Insert key

Press to specify insert mode for insertion at the current position of the cursor.

### [DEL] (Mcl) Delete key

Press to delete the character at the current position of the cursor. When the character is deleted, everything to the right of the cursor position will shift one space to the left.

Pressing [SHIFT] [DEL] (Mcl) [EXE] will clear the memory contents.

### [AC] (Cls) (ON) All clear key

Press to completely clear the displayed formulas, numeric values or texts, and to clear all of the input buffer contents. Also used to release errors indicated by error message displays, and to restore power after reactivation of the auto power off function. (See page 14.)

Pressing [AC] during graph creation or program execution suspends the operation. A suspended operation can be resumed by pressing [EXE].

### [EXE] Execute key

Press to obtain the result of a computation or to draw a graph. Pressed after data input for a programmed computation or to advance to the next execution after a computation result is obtained.

### [Ans] (SPACE) Answer key

Pressing [Ans] followed by [EXE] will recall the last computation result. It can be recalled by [Ans] [EXE] even after it has been cleared using the [AC] key or by switching the power of the unit OFF. When used during program execution, the last result computed is recalled.



## [1] (Det) ~ [9] (Ran#), [·], [EXP] (π) Numeric/Decimal point/Exponent input keys

When entering numeric values, enter the number in order. Press the [·] key to enter the decimal point in the desired position.

To input $1.23 \times 10^{-6}$, press 1 [·] 23 [EXP] [(−)] 6.

[SHIFT] key combinations for the various modes are as follows:

**COMP mode ([MODE] [+])**

| | | |
|---|---|---|
| [➡] | [=] | [≠] |
| [Isz] | [≥] | [≤] |
| [Dsz] | [>] | [<] |
| [Rnd] | [Ran#] | [π] |

**Base-n mode ([MODE] [−])**

| | | |
|---|---|---|
| [➡] | [=] | [≠] |
| [Isz] | [≥] | [≤] |
| [Dsz] | [>] | [<] |
| [ ] | [ ] | [ ] |

Pol(, Rec(, Rnd, Ran# and π cannot be used in this mode.

**SD mode ([MODE] [×])**

| | | |
|---|---|---|
| [➡] | [=] | [≠] |
| [Isz] | [≥] | [≤] |
| [$\bar{x}$] | [$x\sigma_n$] | [$x\sigma_{n-1}$] |
| [Rnd] | [Ran#] | [π] |

Standard deviation functions can be used.

**LR mode ([MODE] [÷])**

| | | |
|---|---|---|
| [A] | [B] | [r] |
| [$\bar{y}$] | [$y\sigma_n$] | [$y\sigma_{n-1}$] |
| [$\bar{x}$] | [$x\sigma_n$] | [$x\sigma_{n-1}$] |
| [Rnd] | [Ran#] | [π] |

Paired variable statistic functions can be used.

## Computation keys

### [+] (Pol(x,y)) [−] (Rec(r,θ)) [×] [÷] Arithmetic operation keys

For addition, subtraction, multiplication and division, enter the computation as it reads. [SHIFT] key combinations for the various modes are as follows:

**COMP mode or SD mode**

[Pol(] [Rec(] ([+] Pol(x,y) and [−] Rec(r,θ) keys) ... Coordinate transformation

**LR mode**

[$\hat{x}$] [$\hat{y}$] ([×] $\hat{x}$ [÷] $\hat{y}$ keys) ... Estimated value computation of $x$ and $y$

[Pol(] [Rec(] ... Coordinate transformation

## ■ Graph keys

Used to produce a variety of graphs (see page 55 for details). These keys cannot be used in the Base-n mode.

**[M-Disp] Mode display key**

- Used to confirm the status of the system mode, calculation mode, angle unit and rounding. Setting status is displayed only while this key is pressed.

**[G↔T] Graph-text key**

- Switches between the graph display and text display (see page 20).

**[Lbl / Plot] Plot key/Label key**

- Press to plot a point on the graph screen.
- Pressed following [SHIFT] to input label within programs.

**[Graph] Graph key**

- Pressed before entering a formula to be used for a graph ("Graph Y=" appears on the display).

**[Trace] Trace key**

- Press to trace over an existing graph and display the $x$ or $y$ coordinate value.

**[Range] Range key**

- Used to confirm or set the range and size of graphs.

**[Factor] Factor key**

- Press to magnify or reduce the upper and lower ranges of graphs.

**[Line] Line key**

- Press to produce line graphs or regression lines.

**[X↔Y / Cls] Clear screen/$x$-$y$ coordinate key**

- [Cls] [EXE] clears the graph display. The text display cannot be cleared using this operation.
- Pressed following [SHIFT] to switch the $x$ and $y$ coordinate display during graph trace operations.

## ■ Function keys

Press for functional computation. Various uses are available in combination with the [SHIFT] key, and/or depending on the mode being used.

**[: / n] Multistatement/Display key**

- Press to separate formulas or commands in programmed computations or consecutive computations.



The result of such combinations is known as a multistatement. (See page 36.)

- When pressed following the [SHIFT] key, the results of each section of the programmed computations or consecutive computations are sequentially displayed with each press of [EXE].

**[ENG] Engineering key**

- Press to convert a computaion result to an exponential display whose exponent is a multiple of three.

($10^{3}$=K, $10^{6}$=M, $10^{9}$=G, $10^{-3}$=m, $10^{-6}$=μ, $10^{-9}$=n, $10^{-12}$=p)

**[Int / √ / Rec] Root/Integer key**

- Press prior to entering a numeric value to obtain the square root of that value.
- When pressed following the [SHIFT] key, the integer portion of a value can be obtained.
- Press followed by [EXE] in the Base-n mode to specify the decimal computation mode.
- When pressed following the [SHIFT] key in the Base-n mode, the subsequently entered value is specified as a decimal value.

**[Frac / $x^2$ / Hex] Square/Fraction key**

- Press after a numeric value is entered to obtain the square of that value.
- When pressed following the [SHIFT] key, the decimal portion of a value can be obtained.
- Press followed by [EXE] in the Base-n mode to specify the hexadecimal computation mode.
- When pressed following the [SHIFT] key in the Base-n mode, the subsequently entered value is specified as a hexadecimal value.

**[log / Bin] Common logarithm key**

- Press prior to entering a value to obtain the common logarithm of that value.
- Press followed by [EXE] in the Base-n mode to specify the binary computation mode.
- When pressed following the [SHIFT] key in the Base-n mode, the subsequently entered value is specified as a binary value.

**[ln / Oct] Natural logarithm key**

- Press prior to entering a value to obtain the natural logarithm of that value.
- Press followed by [EXE] in the Base-n mode to specify the octal computation mode.

- When pressed following the [SHIFT] key in the Base-n mode, the subsequently entered value is specified as an octal value.

### Reciprocal/Factorial key

- Press prior to entering a value to obtain the reciprocal of that value.
- When pressed following the [SHIFT] key, the factorial of a previously entered value can be obtained.
- Press in the Base-n mode to enter A ($10_{10}$) of a hexadecimal value.

### Degree/minute/second key (decimal↔sexagesimal key)

- Press to enter sexagesimal value. (degree/minute/second or hour/minute/second)
  Ex. 78°45'12"→78 [°'"] 45 [°'"] 12 [°'"]
- When pressed following the [SHIFT] key, a decimal based value can be displayed in degrees/minutes/seconds (hours/minutes/seconds).
- Press in the Base-n mode to enter B ($11_{10}$) of a hexadecimal value.

### Anti-common logarithm key

- When pressed, the subsequently entered value becomes an exponent of 10.
- Press in the Base-n mode to enter C ($12_{10}$) of a hexadecimal value.

### Anti-natural logarithm key

- When pressed, the subsequently entered value becomes an exponent of $e$.
- Press in the Base-n mode to enter D ($13_{10}$) of a hexadecimal value.

### Hyperbolic key

- Pressing [hyp], and then [sin], [cos], or [tan] prior to entering a value produces the respective hyperbolic function (sinh, cosh, tanh) for the value.
- Pressing [SHIFT], then [hyp] and then [sin], [cos], or [tan] prior to entering a value produces the respective inverse hyperbolic function ($\sinh^{-1}$, $\cosh^{-1}$, $\tanh^{-1}$) for the value.
- Press in the Base-n mode to enter E ($14_{10}$) of a hexadecimal value.

### Trigonometric function/Inverse trigonometric function keys

- Press one of these keys prior to entering a value to obtain the respective trigonometric function for the value.
- Press [SHIFT] and then one of these keys prior to entering a value to obtain the respective inverse trigonometric function for the value.
- Press [F] in the Base-n mode to enter F ($15_{10}$) of a hexadecimal value.



- When obtaining logical negation for a value in the Base-n mode, press [Not] prior to entering the value.
- Press the [xor] key in the Base-n mode to obtain the exclusive logical sum.

### Value input key

- During execution of program computations or cosecutive computations, press to enter a numeric value.

### Assignment key

- Press prior to entering a memory to assign the result of a computation to that memory.
  Ex. To assign the result of 12+45 to memory A: [1] [2] [+] [4] [5] [→] [ALPHA] [A] [EXE]
- When pressed following the [SHIFT] key, the same numeric value can be assigned to multiple memories.
  Ex. To assign the value 456 to memories A through F: [4] [5] [6] [→] [ALPHA] [A] [SHIFT] [~] [ALPHA] [F] [EXE]

### Parenthesis keys

- Press the open parenthesis key and the closed parenthesis key at the position required in a formula.
- When pressed following the [SHIFT] key, a comma or semicolon can be inserted to separate the arguments in coordinate transformation or consecutive computations.

### Minus key

- Press prior to entering a numeric value to make that value negative.
  Ex. −123→ [(−)] [1] [2] [3]
- Press in the Base-n mode prior to entering a value to obtain the negative of that value. The negative number is the two's complement of the value entered.

### Power/Absolute value key

- Enter $x$ (any number), press this key and then enter $y$ (any number) to compute $x$ to the power of $y$.
  In the SD or LR mode, this function is only available after pressing the [SHIFT] key.
- Press following the [SHIFT] key to obtain the absolute value of a subsequently entered numeric value.
- Press in the Base-n mode to obtain a logical product ("and").
- Press in the SD or LR mode to delete input data.

### Root/Cube root key

- Enter $x$, press this key and then enter $y$ to compute the $x$th root of $y$. In the SD or LR mode, this function is only available after pressing the [SHIFT] key.
- Press following the [SHIFT] key to obtain the cube root of a subsequently entered numeric value.
- Press in the Base-n mode to obtain a logical sum ("or").
- Used as a data input key in the SD or LR mode.

## ■ Adjusting the display contrast

Rotating the contrast dial upwards makes the characters on the display lighter, while rotating it downwards makes the characters darker.

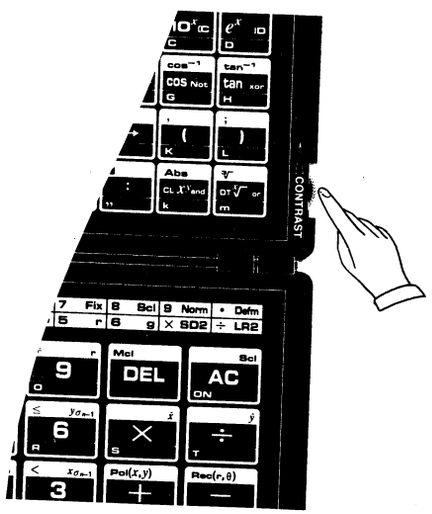




# 1-2 POWER AND BATTERY REPLACEMENT

This unit is powered by three lithium batteries (CR2025). Low battery power is indicated by a dim display, when the contrast is set to its strongest setting. Replace batteries as soon as possible after weakened batteries are noticed. Notice that the batteries of this unit are used for both normal operation and memory back up. Be sure to follow the sequence described below to avoid the loss of data while replacing batteries. Also, batteries should be replaced at least once every two years no matter how much they have been used. Also note that removing more than one battery from the unit at the same time can cause data stored in memory to be changed. **Remove batteries one at a time only.**

1. Switch the power of the unit OFF and remove the four screws holding the back cover in place.
2. Remove screw Ⓐ and battery cover A. Then remove the old battery.
3. Wipe off a new battery with a dry cloth and load it into the unit with the possitive pole (⊕) facing upwards.
4. Press down on battery with the battery cover A and replace screw Ⓐ.
5. Repeat steps 1. through 4. to replace baterries B and C.
6. Replace the back cover of the unit and fasten it in place using the four screws.
7. Switch the power of the unit ON and adjust the contrast using the procedures described on page 4.

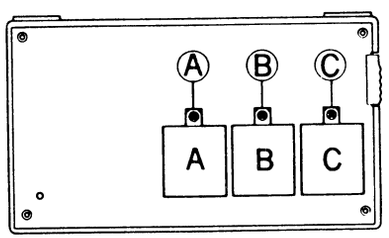


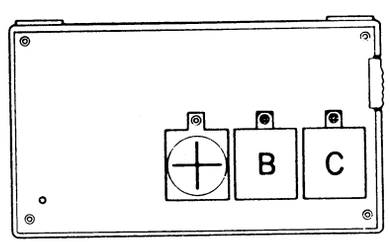

**IMPORTANT**

- Never allow batteries to come into contact with direct heat. Doing so can cause them to explode.
- Be sure to load batteries with positive poles facing upwards.
- Keep batteries out of the reach of small children. Contact a physician immediately if swallowed.

## ■ Auto power off function

The power of the unit is automatically switched off approximately 6 minutes after the last key operation (except during program computations). Once this occurs, power can be restored either by switching the power of the unit OFF and then ON again, or by pressing the [AC] key. (Numeric values in the memories, programs or computation modes are unaffected when power is switched off.)



# 1-3 BEFORE BEGINNING COMPUTATIONS...

## ■ Computation priority sequence

This unit employs true algebraic logic to compute the parts of a formula in the following order:

1. Coordinate transformation Pol ($x$, $y$), Rec ($r$, $\theta$)
2. Type A functions* $x^2$, $x^{-1}$, $x!$, °, $^r$, $^g$, °’”
3. Power/root $x^y$, $\sqrt[x]{\ }$
4. Abbreviated multiplication format in front of $\pi$ or memory
   $2\pi$, 4R, etc.
5. Type B functions* $\sqrt{\ }$, $\sqrt[3]{\ }$, log, $10^x$, ln, $e^x$, sin, cos, tan, $\sin^{-1}$, $\cos^{-1}$, $\tan^{-1}$, sinh, cosh, tanh, $\sinh^{-1}$, $\cosh^{-1}$, $\tanh^{-1}$, (−), Abs, Int, Frac, h, d, b, o, Neg, Not
6. Abbreviated multiplication format in front of Type B functions or parenthesis 3sin5, $6\sqrt{7}$, 2sin30cos60, etc.
7. ×, ÷
8. +, −
9. and
10. or, xor
11. Relational operators <, >, =, ≠, ≤, ≥

* Functions are divided into two types.
  Type A functions are entered after the argument, while Type B functions are entered before the argument.
* *When functions with the same priority are used in series, execution is performed from right to left: e.g.,* $e^x \ln\sqrt{120} \rightarrow e^x \{\ln\sqrt{120}\}$.
  *Otherwise, execution is from left to right.*
* *Compound functions are executed from right to left:*
  *e.g.,* $\sin \cos^{-1} 0.6 \rightarrow \sin(\cos^{-1} 0.6)$.
* *Everything contained within parentheses receives highest priority.*

**Ex.** $2+3\times(\log \sin 2\pi^2_{rad}+6.8)=22.07101691$



## ■ Number of stacks

This unit features a memory known as a stack for the temporary storage of low priority numeric values and commands (functions, etc). The numeric value stack has eight levels, while the command stack has twenty. If a complex formula is employed that exceeds the stack space available, a stack error (Stk ERROR) message will appear on the display.

**Ex. Stack counting method**




Numeric value stack

| | |
|---|---|
| ① | 2 |
| ② | 3 |
| ③ | 4 |
| ④ | 5 |
| ⑤ | 4 |
| ⋮ | |

Command stack

| | |
|---|---|
| 1 | × |
| 2 | ( |
| 3 | ( |
| 4 | + |
| 5 | × |
| 6 | ( |
| 7 | + |
| ⋮ | |

** Computations are performed in the order of the highest computation priority first. Once a computation is executed, it is cleared from the stack.*



## ■ Computation modes

This unit features modes for manual computations, storing programs, and modes for general as well as statistical computations. The proper mode to suit computational requirements should be employed.

### ● Operation modes

There are a total of three operation modes.

1. RUN mode
   Graph production as well as manual computations and program executions.
2. WRT mode
   Program storage and editing. (See Section 4.)
3. PCL mode
   Deletion of stored programs. (See Section 4.)

### ● Computation modes

There are a total of six computation modes which are employed according to the type of computation.

1. COMP mode
   General computations, including functional computations.
2. Base-n mode
   Binary, octal, decimal, hexadecimal conversion and computations, as well as logical operations. (See page 44.) Function computations and graph drawing cannot be performed.
3. SD1 mode
   Standard deviation computation (single variable statistics). (See page 48.)
4. SD2 mode
   For production of bar graph, line graph or normal distribution curve according to single variable statistical data. (See page 83.)
5. LR1 mode
   Regression computation (paired variable statistics). (See page 50.)
6. LR2 mode
   For production of regression line graph according to paired variable statistical data. (See page 86.)

With so many modes available, computations should always be performed after confirming which mode is active.

** IMPORTANT: When the power of the unit is switched OFF (including auto power off), the current system mode is cancelled, and the unit will be set to the RUN mode when switched ON again. However, the calculation mode, number of decimal place setting (MODE 7 n), number of significant digits (MODE 8 n), and angle unit (Deg, Rad, Gra) will be retained in memory. The mode setting is displayed when the power of the unit is switched ON. Confirm whether the desired mode is set before performing calculations.*

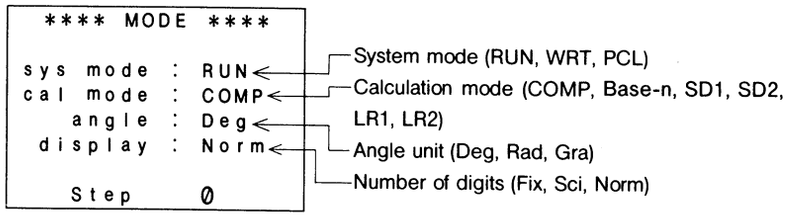
**** MODE ****
sys mode : RUN
cal mode : COMP
angle : Deg
display : Norm
Step 0
System mode (RUN, WRT, PCL)
Calculation mode (COMP, Base-n, SD1, SD2, LR1, LR2)
Angle unit (Deg, Rad, Gra)
Number of digits (Fix, Sci, Norm)

## ■ Number of input/output digits and computation digits

- The allowable input/output range (number of digits) of this unit is 10 digits for a mantissa and 2 digits for an exponent. Computations, however, are internally performed with a range of 13 digits for a mantissa and 2 digits for an exponent.

**Ex.** $3\times10^{5}\div7=$

3 [EXP] 5 [÷] 7 [EXE]

3 [EXP] 5 [÷] 7 [−] 42857 [EXE]

| |
|---|
| 42857.14286 |
| 0.14285714 |

** Computation results greater than $10^{10}$ (10 billion) or less than $10^{-2}$ (0.01) are automatically displayed in exponential form.*

**Ex.** $123456789\times9638=$

123456789 [×] 9638 [EXE]

| |
|---|
| 1.189876532 E +12 |

Mantissa Exponent

Once a computation is completed, the mantissa is rounded off to 10 digits and displayed. And the displayed mantissa can be used for the next computation.

**Ex.** $3\times10^{5}\div7=$

3 [EXP] 5 [÷] 7 [EXE]

[−] 42857 [EXE]

| |
|---|
| 42857.14286 |
| 0.14286 |

** Values are stored in memory with 13 digits for the mantissa and 2 digits for the exponent.*



## ■ Overflow and errors

If the computational range of the unit is exceeded, or incorrect inputs are made, an error message will appear on the display window and subsequent operation will be impossible. This is the error check function. The following operations will result in errors:

(1) The answer, whether intermediate or final, or any value in memory exceeds the value of $\pm9.999999999\times10^{99}$.

(2) An attempt is made to perform functional computations that exceed the input range. (See page 201.)

(3) Improper operation during statistical computations.
(Ex. Attempting to obtain $\bar{x}$ or $x\sigma_n$ without data input.)

(4) The capacity of the numeric value stack or the command stack is exceeded.
(Ex. Entering nineteen successive [(] 's followed by [2] [+] [3] [×] [4])

(5) Even though memory has not been expanded, a memory name such as Z [2] is used. (See page 24 for details on memory.)

(6) Input errors are made.
(Ex. [5] [+] [+] [3] [EXE])

(7) When improper arguments are used in commands or functions that require arguments. (i.e. Input of an argument outside of the range of 0~9 for Sci or Fix.)

The following error messages will be displayed for the operations noted above:

(I)~(3) Ma ERROR
(4) Stk ERROR
(5) Mem ERROR
(6) Syn ERROR
(7) Arg ERROR

Besides these, there are an "Ne ERROR" (nesting error) and a "Go ERROR". These errors mainly occur when using programs. See page 103 or the Error Message Table on page 199.

## ■ Number of input characters

This unit features a 127-step area for computation execution.
One function comprises one step. Each press of numeric or ⊞, ⊟, ⊠ and ⊡ keys comprise one step. Though such operations as [SHIFT] [$x!$] ([$x^{-1}$] key) require two key operations, they actually comprise only one function and, therefore, only one step.
These steps can be confirmed using the cursor. With each press of the [◁] or [▷] key the cursor is moved one step.
Input characters are limited to 127-steps. Usually the cursor is represented by a blinking "_", but once the 123rd step is reached the cursor changes to a blinking "■". If the "■" appears during a computation, the computation should be divided at some point and performed in two parts.

* *When numeric values or computation commands are input, they appear on the display window from the left. Computational results, however, are displayed from the right.*

## ■ Graphic and text displays

This unit has a graph display for production of graphs, as well as a text display for production of formulas and commands. These two types of display contents are stored independently of each other.
Switching between graph and text displays is performed using the [G↔T] key. Each press of [G↔T] switches from the current type of display to the other.
Operations to clear the display depend upon the type of display being shown:

Graphs: [Cls] [EXE]
Text: [AC]

Pressing the [AC] key causes a cleared text display to appear if pressed during a graph display.



## ■ Display registers

This unit has separate registers for storing text and graph displays. Both of these two registers are unaffected by key operations except for those related to their functions (calculations or [AC] key operation during text display; graph drawing, switching to text display by [G↔T] after clearing graph display by [Cls] [EXE]).
Since the register stores the previous calculation results, they can be recalled. This is especially useful in the text mode for binary, octal, decimal, and hexadecimal conversions, as well as decimal and significant digit settings.
The following commands will produce previous calculation results:

- Lbl ○
- Dsz ○
- Isz ○
- Mcl
- Hex
- Dec
- Bin
- Oct
- Deg
- Rad
- Gra
- Fix ○
- Sci ○
- Norm
- Rnd
- Scl
- Prog ○

**Ex. Perform the calculation 123×456, and then clear the graph display.**

* *The* [Cls] [EXE] *operation during graph display does not affect the calculation, so the previous calculation result appears on the display.*

[AC] 123 [×] 456 [EXE]

```
123×456
                  56088.
```

[Cls] [EXE]

```
123×456
                  56088.
Cls
                  56088.
```

A calculation result displayed as shown here is cleared to 0 by pressing [AC], or if the power of the unit is switched OFF (including auto power off).

## ■ Corrections

● To make corrections in a formula that is being input, use the [◁] and [▷] keys to move to the position of the error and press the correct keys.

**Ex. To change an input of 122 to 123:**

[1] [2] [2]
[◁]
[3]

| |
|---|
| 122_ |
| 12**2** |
| 123_ |

**Ex. To change an input of cos60 to sin60:**

[cos] [6] [0]
[◁] [◁] [◁]
[sin]

| |
|---|
| cos 60_ |
| **c**os 60 |
| sin **6**0 |

** If, after making corrections, input of the formula is complete, the answer can be obtained by pressing [EXE]. If, however, more is to be added to the formula, advance the cursor using the [▷] key to the end of the formula for input.*

● If an unnecessary character has been included in a formula, use the [◁] and [▷] keys to move to the position of the error and press the [DEL] key. Each press of [DEL] will delete one command (one step).

**Ex. To correct an input of 369××2 to 369×2:**

[3] [6] [9] [×] [×] [2]
[◁] [◁] [DEL]

| |
|---|
| 369××2_ |
| 369×**2** |

● If a character has been omitted from a formula, use the [◁] and [▷] keys to move to the position where the character should have been input, and press the [INS] key. Press [INS] and insertions can be subsequently performed as desierd.

**Ex. To correct an input of $2.36^2$ to $\sin 2.36^2$:**

[2] [·] [3] [6] [$x^2$]
[◁] [◁] [◁] [◁] [◁]
[INS]
[sin]

| |
|---|
| $2.36^2$_ |
| $\underline{2}.36^2$ |
| $\boxed{2}.36^2$ |
| sin $\boxed{2}.36^2$ |



** When [INS] is pressed, the letter at the insertion position is surrounded by "[ ]" and blinks. As many letters and/or commands as desired can be inserted at this position until [◁], [▷], [△], [▽], or [AC] is pressed.*
*This blinking [ ] is indicated by "␣" in the alphabet mode ( [ALPHA] key), while it is indicated by "⌐" in the shift mode ( [SHIFT]).*

## ■ Memory

This unit contains 26 standard memories. Memory names are composed of the 26 letters of the alphabet. Numeric values with 13 digits for a mantissa and 2 digits for an exponent can be stored.

**Ex. To store 123.45 in memory A:**

123.45 [→] [ALPHA] [A]
[EXE]

| |
|---|
| 123.45→A_ |
| 123.45 |

Values are assigned to a memory using the [→] key followed by the memory name.

**Ex. To store the sum of memory A+78.9 in memory B:**

[ALPHA] [A] [+] 78.9 [→] [ALPHA] [B]
[EXE]

| |
|---|
| A+78.9→B_ |
| 202.35 |

**Ex. To add 74.12 to memory B:**

[ALPHA] [B] [+] 74.12 [→] [ALPHA] [B]
[EXE]

| |
|---|
| B+74.12→B_ |
| 276.47 |

● To check the contents of a memory, press the name of the memory to be checked followed by [EXE].

[ALPHA] [A] [EXE]

| |
|---|
| 123.45 |

● To clear the contents of a memory (make them 0), proceed as follows:

**Ex. To clear the contents of memory A only:**

0 [→] [ALPHA] [A] [EXE]

| |
|---|
| 0. |

**Ex. To clear the contents of all the memories:**

[SHIFT] [Mcl]
[EXE]

| |
|---|
| Mcl_ |
| 0. |

● To store the same numeric value to multiple memories, press [SHIFT] followed by [~] ([→] key).

**Ex. To store a value of 10 in memories A through J:**

10 [→] [ALPHA] [A] [SHIFT] [~] [ALPHA] [J]

[EXE]

```
10→A~J_
              10.
```

## ■ Memory expansion

Though there are 26 standard memories, they can be expanded by changing program storage steps to memory. Memory expansion is performed by converting 8 steps to one memory.

** See page 106 for information on the number of program steps.*

| Number of memories | 26 | 27 | 28 | ... | 36 | ... | 76 | ... | 526 |
|---|---|---|---|---|---|---|---|---|---|
| Number of steps | 4006 | 3998 | 3990 | ... | 3926 | ... | 3606 | ... | 6 |

Memory is expanded in units of one. A maximum of 500 memories can be added for a maximum total of 526 (26 + 500). Expansion is performed by pressing [MODE], followed by [▫], a value representing the size of the expansion, and then [EXE].

**Ex. To expand the number of memories by 30 to bring the total to 56:**

[MODE] [▫] 30

```
Defm 30_
```

[EXE]

```
**Defm**
 Program  :  0   <- Number of program steps used
  Memory  :  56  <- Number of memories
3766 Bytes Free  <- Current number of remaining program steps
```

The number of steps used, number of memories and number of remaining steps are displayed. The number of remaining steps indicates the current unused area, and will differ according to the size of the program stored. To check the current number of memories, press [MODE], followed by [▫] and then [EXE].

[MODE] [▫] [EXE]

```
**Defm**
 Program  :  0
  Memory  :  56
3766 Bytes Free
```



To initialize the number of memories (to return the number to 26), enter a zero for the value in the memory expansion sequence outlined above.

[MODE] [▫] 0 [EXE]

```
**Defm**
 Program  :  0
  Memory  :  26
4006 Bytes Free
```

** Though a maximum of 500 memories can be added, if a program has already been stored and the number of remaining steps is less than the desired expansion, an error will be generated. The size of the memory expansion must be equal to or less than the number of steps remaining.*

** The expansion procedure ([MODE] [▫] expansion value) can also be stored as a program.*

● **Using expanded memories**

Expanded memories are used in the same manner as standard memories, and are referred to as Z [1], Z [2], etc. The letter Z followed by a value in brackets indicating the sequential position of the memory is used as the memory name. (Brackets are formed by [ALPHA] [▫] for " [ " and [ALPHA] [EXP] for " ] ".)

After the number of memories has been expanded by 5, memories Z [1] through Z [5] are available.

The use of these memories is similar to that of a standard computer array, with a subscript being appended to the name. For more information concerning an array, see page 124.

## ■ Answer (Ans) function

This unit has an answer function that stores the result of the most recent computation. Once a numeric value or numeric formula is entered and [EXE] is pressed, the result (the answer in the case of the numeric formula) is stored by this function. To recall the stored value, press the [Ans] key.

When [Ans] is pressed, "Ans" will appear on the display, and can be used in this form in subsequent calculations.

** Hereinafter, Ans will be referred to as the Ans memory.*

**Ex.** 123+456=579
789−579=210

[1] [2] [3] [+] [4] [5] [6] [EXE]

[7] [8] [9] [−] [Ans] [EXE]

| |
|---|
| 123+456 |
| 579. |
| 789−Ans |
| 210. |

Numeric values with 13 digits for a mantissa and 2 digits for an exponent can be stored in the Ans memory. The Ans memory is not erased even if the power of the unit is switched OFF. Each time [EXE] is pressed, the value in the Ans memory is replaced with the new value produced by the computation executed.
When a value is stored to another memory using the [EXE] key, that value is not stored in the Ans memory.

**Ex. Perform computation 78+56=134, then store the value 123 to memory A:**

[7] [8] [+] [5] [6] [EXE]

[Ans] [EXE] ... Checking the content of Ans memory

[1] [2] [3] [→] [ALPHA] [A] [EXE]

[Ans] [EXE]

| |
|---|
| 78+56 |
| 134. |
| Ans |
| 134. |
| 123→A |
| 123. |
| Ans |
| 134. |

The Ans memory can be used in the same manner as the other memories, thus making it possible to use it in computation formulas. In multiplication operations, the [×] immediately before [Ans] can be omitted.

**Ex.** 15×3=45
78×45−23=3487

[1] [5] [×] [3] [EXE]

[7] [8] [Ans] [−] [2] [3] [EXE]

| |
|---|
| 15×3 |
| 45. |
| 78Ans−23 |
| 3487. |



# 2. MANUAL COMPUTATIONS

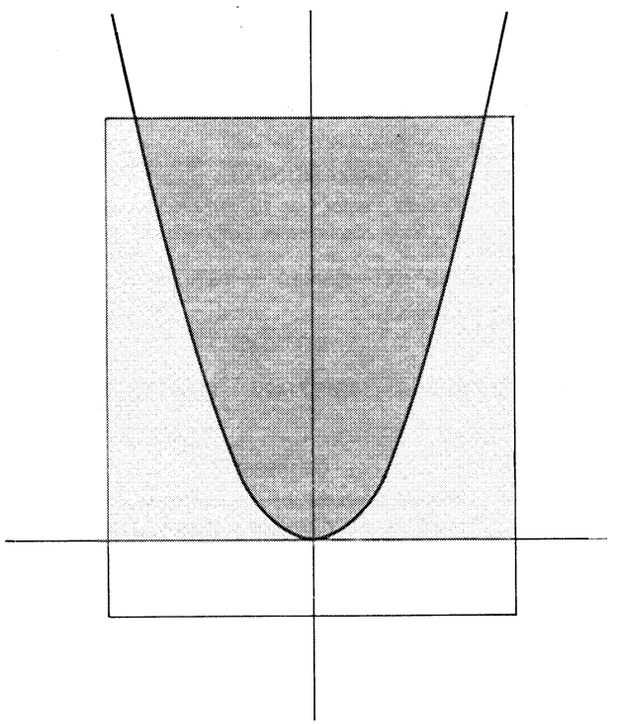

# 2-1 BASIC COMPUTATIONS

## ■ Arithmetic operations

- Arithmetic operations are performed by pressing the keys in the same order as noted in the formula.
- For negative values, press [(−)] before entering the value.

| Example | Operation | Display |
|---|---|---|
| 23+4.5−53=−25.5 | 23 [+] 4.5 [−] 53 [EXE] | −25.5 |
| 56×(−12)÷(−2.5)= 268.8 | 56 [×] [(−)] 12 [÷] [(−)] 2.5 [EXE] | 268.8 |
| 12369×7532×74103= 6.903680613×10^12 (6903680613000) | 12369 [×] 7532 [×] 74103 [EXE] | 6.903680613E+12 |
| * *Results greater than $10^{10}$ (10 billion) or less than $10^{-2}$ (0.01) are displayed in exponential form.* | | |
| (4.5×10^75)×(−2.3×10^−79) =−1.035×10^−3 (−0.001035) | 4.5 [EXP] 75 [×] [(−)] 2.3 [EXP] [(−)] 79 [EXE] | −1.035E−03 |
| (1×10^5)÷7=14285.71429 | 1 [EXP] 5 [÷] 7 [EXE] | 14285.71429 |
| (1×10^5)÷7−14285= 0.7142857 | 1 [EXP] 5 [÷] 7 [−] 14285 [EXE] | 0.71428571 |
| * *Internal computations are computed in 13 digits for a mantissa, and the result is displayed rounded off to 10 digits.* | | |

- For mixed basic arithmetic operations, multiplication and division are given priority over addition and subtraction.

| Example | Operation | Display |
|---|---|---|
| 3+5×6=33 | 3 [+] 5 [×] 6 [EXE] | 33. |
| 7×8−4×5=36 | 7 [×] 8 [−] 4 [×] 5 [EXE] | 36. |
| 1+2−3×4÷5+6=6.6 | 1 [+] 2 [−] 3 [×] 4 [÷] 5 [+] 6 [EXE] | 6.6 |



## ■ Parenthesis computations

| Example | Operation | Display |
|---|---|---|
| 100−(2+3)×4=80 | 100 [−] [(] 2 [+] 3 [)] [×] 4 [EXE] | 80. |
| 2+3×(4+5)=29 | 2 [+] 3 [×] [(] 4 [+] 5 [EXE] | 29. |
| * *Closed parentheses occurring immediately before operation of the [EXE] key may be omitted, no matter how many are required.* | | |
| (7−2)×(8+5)=65 | [(] 7 [−] 2 [)] [(] 8 [+] 5 [EXE] | 65. |
| * *A multiplication sign (×) occurring immediately before an open parenthesis can be omitted.* | | |
| 10−{2+7×(3+6)}=−55 | 10 [−] [(] 2 [+] 7 [(] 3 [+] 6 [EXE] | −55. |
| * *Henceforth, abbreviated style will not be used in this manual.* | | |
| $\frac{2\times3+4}{5}=(2\times3+4)\div5=2$ | [(] 2 [×] 3 [+] 4 [)] [÷] 5 [EXE] | 2. |
| $\frac{5\times6+6\times8}{15\times4+12\times3}=0.8125$ | [(] 5 [×] 6 [+] 6 [×] 8 [)] [÷] [(] 15 [×] 4 [+] 12 [×] 3 [)] [EXE] | 0.8125 |
| $(1.2\times10^{19})-\{(2.5\times10^{20})\times\frac{3}{100}\}=4.5\times10^{18}$ | 1.2 [EXP] 19 [−] [(] 2.5 [EXP] 20 [×] 3 [÷] 100 [)] [EXE] | 4.5E+18 |
| $\frac{6}{4\times5}=0.3$ | 6 [÷] [(] 4 [×] 5 [)] [EXE] | 0.3 |
| * *The above is the same as* 6 [÷] 4 [÷] 5 [EXE]. | | |

## ■ Memory computations

- The contents of memories are not erased when power is switched OFF. They are cleared by pressing [SHIFT] followed by [Mcl] ([DEL] key) and then [EXE].

| Example | Operation | Display |
|---|---|---|
| 9.874×7=69.118 | 9.874 [→] [ALPHA] [A] [EXE] | 9.874 |
| 9.874×12=118.488 | [ALPHA] [A] [×] 7 [EXE] | 69.118 |
| 9.874×26=256.724 | [ALPHA] [A] [×] 12 [EXE] | 118.488 |
| 9.874×29=286.346 | [ALPHA] [A] [×] 26 [EXE] | 256.724 |
| | [ALPHA] [A] [×] 29 [EXE] | 286.346 |
| * *The [→] key is used to input numeric values in memory. (Clearing a memory before input is not required, because the previous value in the memory will be automatically replaced with the new value.)* | | |
| 23+9=32 | 23 [+] 9 [→] [ALPHA] [B] [EXE] | 32. |
| 53−6=47 | 53 [−] 6 [EXE] | 47. |
| −)45×2=90 | [ALPHA] [B] [+] [Ans] [→] [ALPHA] [B] | |
| 99÷3=33 | [EXE] | 79. |
| Total 22 | 45 [×] 2 [EXE] | 90. |
| | [ALPHA] [B] [−] [Ans] [→] [ALPHA] [B] | |
| | [EXE] | −11. |
| | 99 [÷] 3 [EXE] | 33. |
| | [ALPHA] [B] [+] [Ans] [→] [ALPHA] [B] | |
| | [EXE] | 22. |
| 12×(2.3+3.4)−5=63.4 | 2.3 [+] 3.4 [→] [ALPHA] [C] [EXE] | 5.7 |
| | 12 [×] [ALPHA] [C] [−] 5 [EXE] | 63.4 |
| 30×(2.3+3.4+4.5)−15 | 4.5 [→] [ALPHA] [H] [EXE] | 4.5 |
| ×4.5=238.5 | 30 [×] [(] [ALPHA] [C] [+] [ALPHA] [H] [)] | |
| | [−] 15 [ALPHA] [H] [EXE] | 238.5 |
| * *Multiplication signs (×) immediately before memory names can be omitted.* | | |



## ■ Specifying the number of decimal places, the number of significant digits and the exponent display

- To specify the number of decimal places, press [MODE] followed by [7], a value indicating the number of places (0—9) and then [EXE].
- To specify the number of significant digits, press [MODE] followed by [8], a value indicating the number of significant digits (0—9 to set from 1 to 10 digits) and then [EXE].
- Pressing the [ENG] key or [SHIFT] followed by [←] ([ENG] key) will cause the exponent display for the number being displayed to change in multiples of 3.
- The specified number of decimal places or number of significant digits will not be cancelled until another value or [MODE] [9] is specified using the sequence: [MODE], [9], [EXE]. (Specified values are not cancelled even if power is switched OFF or an other mode (besides [MODE] [9]) is specified.)
- Even if the number of decimal places and number of significant digits are specified, internal computations are performed in 13 digits for a mantissa, and the displayed value is stored in 10 digits. To convert these values to the specified number of decimal places and significant digits, press [SHIFT] followed by [Rnd] ([0] key) and then [EXE].

* *You cannot specify the display format (Fix, Sci) while the calculator is in the Base-n mode. Such specifications can only be made if you first exit the Base-n mode.*

| Example | Operation | Display |
|---|---|---|
| 100÷6=16.66666666... | 100 ÷ 6 EXE | 16.66666667 |
| | MODE 7 4 EXE (Four decimal places specified.) | 16.6667 |
| | MODE 9 EXE (Specification cancelled.) | 16.66666667 |
| | MODE 8 5 EXE (Five significant digits specified.) | 1.6667E+01 |
| | MODE 9 EXE (Specification cancelled.) | 16.66666667 |
| * *Values are displayed rounded off to the place specified.* | | |
| 200÷7×14=400 | MODE 7 3 EXE (Three decimal places specified.) | 16.667 |
| | 200 ÷ 7 EXE | 28.571 |
| (Continues computation with 10-digit display.) | × | 28.57142857×_ |
| | 14 EXE | 400.000 |
| | If the same computation is performed with the specified number of digits: | |
| | 200 ÷ 7 EXE | 28.571 |
| | (Value stored internally cut off at specified decimal place.) SHIFT Rnd EXE | 28.571 |
| | × | 28.571×_ |
| | 14 EXE | 399.994 |
| | MODE 9 EXE (Specification cancelled.) | 399.994 |
| 123m×456=56088m<br>=56.088km | 123 × 456 EXE | 56088. |
| | ENG | 56.088E+03 |
| 78g×0.96=74.88g<br>=0.07488kg | 78 × 0.96 EXE | 74.88 |
| | SHIFT ENG | 0.07488E+03 |



# 2-2 SPECIAL FUNCTIONS

## ■ Continuous computation function

Even if computations are concluded with the EXE key, the result obtained can be used for further computations. In this case, computations are performed with 10 digits for the mantissa which is displayed.

**Ex. 3×4=12 Continuing ÷3.14=**

3 × 4 EXE

(Continuing) ÷ 3.14 EXE

| |
|---|
| 3×4 |
| 12. |
| 12.÷3.14 |
| 3.821656051 |

**Ex. To compute 1÷3×3**

1 ÷ 3 × 3 EXE

1 ÷ 3 EXE

(Continuing) × 3 EXE

| |
|---|
| 1÷3×3 |
| 1. |
| 1÷3 |
| 0.3333333333 |
| 0.3333333333×3 |
| 0.9999999999 |

This function can be used with memory and Type A functions ($x^2$, $x^{-1}$, $x!$ : see page 44), and +, −, $x^y$, $\sqrt[x]{\ }$, °'".

**Ex. To store the result of 12×45 in memory C:**

12 × 45 EXE

(Continuing) → ALPHA C EXE

| |
|---|
| 12×45 |
| 540. |
| 540.→C |
| 540. |

**Ex. To square the result of 78÷6 (see page 42):**

78 ÷ 6 EXE

(Continuing) $x^2$ EXE

| |
|---|
| 78÷6 |
| 13. |
| $13.^2$ |
| 169. |

## ■ Replay function

● This function stores formulas that have been executed. After execution is complete pressing either the [▷] or [◁] key will display the formula executed.
Pressing [▷] will display the formula, with the cursor located under the first character.
Pressing [◁] will display the formula, with the cursor located at the space following the last character.
Then using [▷], [◁], [△] and [▽] to move the cursor, the formula can be checked and numeric values or commands can be changed for subsequent execution.

**Ex.**

123 [×] 456 [EXE]

```
123×456
          56088.
```

[▷]

```
123×456
```

* *The formula appears after clearing the display.*

[EXE]

```
123×456
          56088.
```

[◁]

```
123×456_
```

**Ex. 4.12×3.58+6.4=21.1496**
**4.12×3.58−7.1=7.6496**

4.12 [×] 3.58 [+] 6.4 [EXE]

```
4.12×3.58+6.4
          21.1496
```

[◁]

```
4.12×3.58+6.4_
```

[◁] [◁] [◁] [◁]

```
4.12×3.58+6.4
```

[−] 7.1 [EXE]

```
4.12×3.58−7.1
          7.6496
```



● If an error is generated during computation execution, an error check function eliminates the need to clear the error using [AC] and then re-starting input from the beginning. Pressing either [▷] or [◁] will automatically move the cursor to the point in the formula that generated the error and display it.

**Ex. When 14÷0×2.3 is mistakenly entered for 14÷10×2.3:**

14 [÷] 0 [×] 2.3 [EXE]

```
14÷0×2.3
 Ma  ERROR
  Step    4
```

[▷] (or [◁])

```
14÷0×2.3
```

Error generated here.

[◁] [INS] 1 [EXE]

```
14÷10×2.3
          3.22
```

* *As with the number of input characters (see page 20), the replay function can accept input up to 127 steps.*
* *The replay function is cleared when the [AC] key is pressed, when power is switched OFF or when the mode is changed.*

## ■ Multistatement function

- The multistatement function (using colons to separate formulas or statements) available in program computations can also be used for manual computations.
- The multistatement function allows formulas to be separated by colons to make consecutive, multiple statement computations possible.
- When [EXE] is pressed to execute a formula input using the multistatement format, the formula is executed in order from the beginning.
- Inputting "◢" ([SHIFT] [◢]) in place of the colon will display the computational result up to that point during execution.

Ex. 6.9×123=848.7
123÷3.2=38.4375

123 [→] [ALPHA] [A] [:] 6.9 [×]
[ALPHA] [A] [SHIFT] [◢]
[ALPHA] [A] [÷] 3.2 [EXE]

```
123→A:6.9×A◢
A÷3.2
                  848.7
              -Disp-
```

The display halted by the ◢ command is represented with —Disp—.

[EXE]

```
123→A:6.9×A◢
A÷3.2
                  848.7
                38.4375
```

** Even if "◢" is not input at the end of a formula, the final result will be displayed.*

** Consecutive computations using multistatements cannot be performed.*

123×456 : +5
Invalid



# 2-3 FUNCTIONAL COMPUTATIONS

## ■ Angular measurement units

- The unit of angular measurement (degrees, radians, grads) is set by pressing [MODE] followed by a value from 4 through 6 and then [EXE].
- The numeric value from 4 through 6 specifies degrees, radians and grads respectively.
- Once a unit of angular measurement is set, it remains in effect until a new unit is set. Settings are not cleared when power is switched OFF.
- The unit of angular measurement can be checked by pressing the [M Disp] key.
- You cannot specify the unit of angular measurement (degrees, radians, grads) while the calculator is in the Base-n mode. Such specifications can only be made if you first exit the Base-n mode.

| Example | Operation | Display |
|---|---|---|
| Conversion of 4.25 rad to degrees | [MODE] [4] [EXE]<br>4.25 [SHIFT] [MODE] [5] [EXE] | 243.5070629 |
| Conversion of 1.23 grad to radians | [MODE] [5] [EXE]<br>1.23 [SHIFT] [MODE] [6] [EXE] | 0.01932079482 |
| Conversion of 7.89 degrees to grads | [MODE] [6] [EXE]<br>7.89 [SHIFT] [MODE] [4] [EXE] | 8.766666667 |
| Result displayed in degrees<br>47.3°+82.5 rad=<br>4774.20181 | [MODE] [4] [EXE]<br>47.3 [+] 82.5 [SHIFT] [MODE] [5] [EXE] | 4774.20181 |
| 12.4°+8.3 rad−1.8 gra=<br>486.33497 | 12.4 [+] 8.3 [SHIFT] [MODE] [5] [−]<br>1.8 [SHIFT] [MODE] [6] [EXE] | 486.33497 |
| Result displayed in radians<br>24°6'31"+85.34 rad=<br>85.76077464 | [MODE] [5] [EXE]<br>24 [°'"] 6 [°'"] 31 [°'"] [SHIFT] [MODE] [4] [+] 85.34 [EXE] | 85.76077464 |
| Result displayed in grads<br>36.9°+41.2 rad=<br>2663.873462 | [MODE] [6] [EXE]<br>36.9 [SHIFT] [MODE] [4] [+] 41.2 [SHIFT] [MODE] [5] [EXE] | 2663.873462 |

## ■ Trigonometric functions and inverse trigonometric functions

● Be sure to set the unit of angular measurement before performing trigonometric function and inverse trigonometric function computations.

| Example | Operation | Display |
|---|---|---|
| sin 63°52'41"= 0.897859012 | MODE 4 EXE<br>sin 63 °'" 52 °'" 41 °'" EXE | 0.897859012 |
| $\cos\left(\frac{\pi}{3}\text{ rad}\right)=0.5$ | MODE 5 EXE<br>cos ( SHIFT π ÷ 3 ) EXE | 0.5 |
| tan (−35 gra)= −0.6128007881 | MODE 6 EXE<br>tan (−) 35 EXE | −0.6128007881 |
| 2·sin 45° × cos 65°= 0.5976724775 | MODE 4 EXE<br>2 × sin 45 × cos 65 EXE<br>Can be omitted. | 0.5976724775 |
| $\sin^{-1}0.5=30°$ (Determine the value of $x$ when $\sin x=0.5$.) | SHIFT sin⁻¹ 0.5 EXE<br>Can be entered as .5 | 30. |
| $\cos^{-1}\frac{\sqrt{2}}{2}=$ 0.7853981634 rad $=\frac{\pi}{4}$ rad | MODE 5 EXE<br>SHIFT cos⁻¹ ( √ 2 ÷ 2 ) EXE<br>÷ SHIFT π EXE | 0.7853981634<br>0.25 |
| tan⁻¹ 0.741= 36.53844577° =36°32'18.4" | MODE 4 EXE<br>SHIFT tan⁻¹ 0.741 EXE<br>SHIFT °'" | 36.53844577<br>36°32'18.4" |
| * *If the total number of digits for degrees/minutes/seconds exceeds eleven digits, the high-order values (degrees and minutes) are given display priority, and any lower-order values are not displayed. However, the entire value is stored within the unit as a decimal value.* | | |
| 2.5×(sin⁻¹0.8−cos⁻¹0.9) =68°13'13.53" | 2.5 × ( SHIFT sin⁻¹ 0.8 −<br>SHIFT cos⁻¹ 0.9 ) EXE SHIFT °'" | 68°13'13.53" |
| sin18°×cos0.25rad= 0.2994104044 | sin 18 × cos 0.25 SHIFT<br>MODE 5 EXE | 0.2994104044 |
| * *The above is computed in radians, and is the same as* sin 18 SHIFT MODE 4 × cos 0.25 EXE. | | |



## ■ Logarithmic and exponential functions

| Example | Operation | Display |
|---|---|---|
| log 1.23($\log_{10}1.23$)= 0.08990511144 | log 1.23 EXE | 0.08990511144 |
| ln 90($\log_e 90$)= 4.49980967 | ln 90 EXE | 4.49980967 |
| log 456÷ln 456= 0.4342944819 (log/ln ratio=constant M) | log 456 ÷ ln 456 EXE | 0.4342944819 |
| $10^{1.23}$=16.98243652 (To obtain the antilogarithm of common logarithm 1.23) | 10ˣ 1.23 EXE | 16.98243652 |
| $e^{4.5}$=90.0171313 (To obtain the antilogarithm of natural logarithm 4.5) | eˣ 4.5 EXE | 90.0171313 |
| $10^4\cdot e^{-4}+1.2\cdot 10^{2.3}$= 422.5878667 | 10ˣ 4 × eˣ<br>(−) 4 + 1.2 × 10ˣ<br>2.3 EXE | 422.5878667 |
| $5.6^{2.3}$=52.58143837 | 5.6 $x^y$ 2.3 EXE | 52.58143837 |
| $\sqrt[7]{123}$ (=$123^{\frac{1}{7}}$)= 1.988647795 | 7 $\sqrt[x]{\ }$ 123 EXE | 1.988647795 |
| $(78-23)^{-12}$= $1.305111829\times10^{-21}$ | ( 78 − 23 ) $x^y$ (−) 12 EXE | 1.305111829E−21 |
| $2+3\times\sqrt[3]{64}-4=10$ | 2 + 3 × 3 $\sqrt[x]{\ }$ 64 − 4 EXE | 10. |
| * *$x^y$ and $\sqrt[x]{\ }$ given computation priority over × and ÷* | | |
| $2\times3.4^{(5+6.7)}$=3306232.001 | 2 × 3.4 $x^y$ ( 5 + 6.7 ) EXE | 3306232.001 |

## ■ Hyperbolic functions and inverse hyperbolic functions

| Example | Operation | Display |
|---|---|---|
| sinh 3.6=18.28545536 | [hyp] [sin] 3.6 [EXE] | 18.28545536 |
| cosh 1.23=1.856761057 | [hyp] [cos] 1.23 [EXE] | 1.856761057 |
| tanh 2.5=0.9866142982 | [hyp] [tan] 2.5 [EXE] | 0.9866142982 |
| cosh 1.5−sinh 1.5=<br>0.2231301601<br>$=e^{-1.5}$ | [hyp] [cos] 1.5 [−] [hyp] [sin] 1.5 [EXE]<br>(Continuing) [ln] [Ans] [EXE] | 0.2231301601<br>−1.5 |
| (Proof of cosh $x$ $\pm$sinh $x=e^{\pm x}$) | | |
| $\sinh^{-1}30$=4.094622224 | [SHIFT] [hyp] [sin$^{-1}$] 30 [EXE] | 4.094622224 |
| $\cosh^{-1}\left(\frac{20}{15}\right)$=<br>0.7953654612 | [SHIFT] [hyp] [cos$^{-1}$] [(] 20 [÷] 15 [)] [EXE] | 0.7953654612 |
| Determine the value of $x$ when tanh 4 $x$=0.88<br>$x=\frac{\tanh^{-1}0.88}{4}$=<br>0.3439419141 | [SHIFT] [hyp] [tan$^{-1}$] 0.88 [÷] 4 [EXE] | 0.3439419141 |
| $\sinh^{-1}2\times\cosh^{-1}1.5$=<br>1.389388923 | [SHIFT] [hyp] [sin$^{-1}$] 2 [×] [SHIFT] [hyp] [cos$^{-1}$] 1.5 [EXE] | 1.389388923 |
| $\sinh^{-1}\left(\frac{2}{3}\right)+\tanh^{-1}\left(\frac{4}{5}\right)$=<br>1.723757406 | [SHIFT] [hyp] [sin$^{-1}$] [(] 2 [÷] 3 [)] [+] [SHIFT] [hyp] [tan$^{-1}$] [(] 4 [÷] 5 [)] [EXE] | 1.723757406 |



## ■ Coordinate transformation

● Rectangular coordinates




Pol →
← Rec

● Polar coordinates




● Computation results are stored in memories I and J. (Contents of memory I displayed.)

Pol→I=$r$, J=$\theta$

Rec→I=$x$, J=$y$

● With polar coordinates, $\theta$ can be computed within a range of $-180° < \theta \leqq 180°$. (The computation range is the same with radians or grads.)

| Example | Operation | Display |
|---|---|---|
| If $x$=14 and $y$=20.7, what are $r$ and $\theta$ ? | [MODE] [4] [EXE]<br>[SHIFT] [Pol(] 14 [SHIFT] [,] 20.7 [)] [EXE]<br>(Continuing) [ALPHA] [J] [EXE]<br>[SHIFT] [°'''] | 24.98979792 ($r$)<br>55°55'42.2" ($\theta$) |
| If $x$=7.5 and $y$=−10, what are $r$ and $\theta$ rad? | [MODE] [5] [EXE]<br>[SHIFT] [Pol(] 7.5 [SHIFT] [,] [(−)] 10 [)] [EXE]<br>(Continuing) [ALPHA] [J] [EXE] | 12.5 ($r$)<br>−0.927295218 ($\theta$) |
| If $r$=25 and $\theta$=56, what are $x$ and $y$? | [MODE] [4] [EXE]<br>[SHIFT] [Rec(] 25 [SHIFT] [,] 56 [)] [EXE]<br>(Continuing) [ALPHA] [J] [EXE] | 13.97982259 ($x$)<br>20.72593931 ($y$) |
| If $r$=4.5 and $\theta=\frac{2}{3}\pi$ rad, what are $x$ and $y$? | [MODE] [5] [EXE]<br>[SHIFT] [Rec(] 4.5 [SHIFT] [,] [(] 2 [÷] 3 [×] [SHIFT] [π] [)] [)] [EXE]<br>(Continuing) [ALPHA] [J] [EXE] | −2.25 ($x$)<br>3.897114317 ($y$) |

## ■ Other functions ($\sqrt{\ }$, $x^2$, $x^{-1}$, $x!$, $\sqrt[3]{\ }$, Ran#, Abs, Int, Frac)

| Example | Operation | Display |
|---|---|---|
| $\sqrt{2}+\sqrt{5}=3.65028154$ | $\sqrt{\ }$ 2 + $\sqrt{\ }$ 5 EXE | 3.65028154 |
| $2^2+3^2+4^2+5^2=54$ | 2 $x^2$ + 3 $x^2$ + 4 $x^2$ + 5 $x^2$ EXE | 54. |
| $\frac{1}{\frac{1}{3}-\frac{1}{4}}=12$ | ( 3 $x^{-1}$ − 4 $x^{-1}$ ) $x^{-1}$ EXE | 12. |
| $8!\ (=1\times2\times3\times\cdots\times8)=40320$ | 8 SHIFT $x!$ EXE | 40320. |
| $\sqrt[3]{36\times42\times49}=42$ | SHIFT $\sqrt[3]{\ }$ ( 36 × 42 × 49 ) EXE | 42. |
| Random number generation (pseudorandom number from 0.000 to 0.999) | SHIFT Ran# EXE | (Ex) 0.792 |
| $\sqrt{13^2-5^2}+\sqrt{3^2+4^2}=17$ | $\sqrt{\ }$ ( 13 $x^2$ − 5 $x^2$ ) + $\sqrt{\ }$ ( 3 $x^2$ + 4 $x^2$ ) EXE | 17. |
| $\sqrt{1-\sin^2 40^\circ}=0.7660444431=\cos 40^\circ$ | MODE 4 EXE<br>$\sqrt{\ }$ ( 1 − ( sin 40 ) $x^2$ ) EXE | 0.7660444431 |
| (Proof of $\cos\theta=\sqrt{1-\sin^2\theta}$) | (Continuing) SHIFT $\cos^{-1}$ Ans EXE | 40. |
| $\frac{1}{2!}+\frac{1}{4!}+\frac{1}{6!}+\frac{1}{8!}=0.5430803571$ | 2 SHIFT $x!$ $x^{-1}$ + 4 SHIFT $x!$ $x^{-1}$ + 6 SHIFT $x!$ $x^{-1}$ + 8 SHIFT $x!$ $x^{-1}$ EXE | 0.5430803571 |
| What is the absolute value of the common logarithm of $\frac{3}{4}$?<br>$\left\|\log\frac{3}{4}\right\|=0.1249387366$ | SHIFT Abs log ( 3 ÷ 4 ) EXE | 0.1249387366 |



| Example | Operation | Display |
|---|---|---|
| What is the integer part of $\frac{7800}{96}$? | SHIFT Int ( 7800 ÷ 96 ) EXE | 81. |
| What is the fraction part of $\frac{7800}{96}$? | Frac ( 7800 ÷ 96 ) EXE | 0.25 |
| What is the aliquot part of 2512549139÷2141? | 2512549139 ÷ 2141 EXE<br>Frac ( 2512549139 ÷ 2141 ) EXE | 1173540.<br>0.99953 |

# 2-4 BINARY, OCTAL, DECIMAL, HEXADECIMAL COMPUTATIONS

- Binary, octal, decimal and hexadecimal computations, conversions and logical operations are performed in the Base-n mode (press [MODE] [−]).
- The number system (2, 8, 10, 16) is set by respectively pressing [Bin], [Oct], [Dec] or [Hex], followed by [EXE].
- Number systems are specified for specific values by pressing [SHIFT], then the number system designator ([b], [o], [d] or [h]), immediately followed by the value.
- General function computations cannot be performed in the Base-n mode.
- Only integers can be handled in the Base-n mode. If a computation produces a result that includes a decimal value, the decimal portion is cut off.
- Octal, decimal and hexadecimal computations can be handled up to 32 bits, while binary can be handled up to 16 bits.

| | |
|---|---|
| Binary | Up to 16 digits |
| Octal | Up to 11 digits |
| Decimal | Up to 10 digits |
| Hexadecimal | Up to 8 digits |

- The total range of numbers handled in this mode is 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F. If values not valid for the particular number system are used, attach the corresponding designator (b, o, d or h), or an error message will appear.

Valid values

| | |
|---|---|
| Binary | 0, 1 |
| Octal | 0, 1, 2, 3, 4, 5, 6, 7 |
| Decimal | 0, 1, 2, 3, 4, 5, 6, 7, 8, 9 |
| Hexadecimal | 0, 1, 2, 3, 4, 5, 6, 7, 8, 9, A, B, C, D, E, F |

- Negative numbers in binary, octal and hexadecimal are expressed as two's complements.
- To distinguish the A, B, C, D, E, F used in the hexadecimal system from standard letters they appear as: 𝔸, 𝔹, ℂ, 𝔻, 𝔼, 𝔽.



- Computation range (in Base-n mode)

| | |
|---|---|
| Binary | Positive: $111111111111111 \geqq x \geqq 0$ |
| | Negative: $1111111111111111 \geqq x \geqq 1000000000000000$ |
| Octal | Positive: $17777777777 \geqq x \geqq 0$ |
| | Negative: $37777777777 \geqq x \geqq 20000000000$ |
| Decimal | Positive: $2147483647 \geqq x \geqq 0$ |
| | Negative: $-1 \geqq x \geqq -2147483648$ |
| Hexadecimal | Positive: $7FFFFFFF \geqq x \geqq 0$ |
| | Negative: $FFFFFFFF \geqq x \geqq 80000000$ |

- You cannot specify the unit of angular measurement (degrees, radians, grads) or the display format (Fix, Sci) while the calculator is in the Base-n mode. Such specifications can only be made if you first exit the Base-n mode.

## ■ Binary,octal, decimal, hexadecimal conversions

| Example | Operation | Display |
|---|---|---|
| | [MODE] [−] | |
| What are the decimal values for $2A_{16}$ and $274_8$? | [Dec] [EXE] | |
| | [SHIFT] [h] 2A [EXE] | 42. |
| | [SHIFT] [o] 274 [EXE] | 188. |
| What are the hexadecimal values for $123_{10}$ and $1010_2$? | [Hex] [EXE] | |
| | [SHIFT] [d] 123 [EXE] | 0000007B |
| | [SHIFT] [b] 1010 [EXE] | 0000000A |
| What are the octal values for $15_{16}$ and $1100_2$? | [Oct] [EXE] | |
| | [SHIFT] [h] 15 [EXE] | 00000000025 |
| | [SHIFT] [b] 1100 [EXE] | 00000000014 |
| What are the binary values for $36_{10}$ and $3B7_{16}$? | [Bin] [EXE] | |
| | [SHIFT] [d] 36 [EXE] | 0000000000100100 |
| | [SHIFT] [h] 3B7 [EXE] | 0000001110110111 |

## ■ Negative expressions

| Example | Operation | Display |
|---|---|---|
| | [MODE] [−] | |
| How is $110010_2$ expressed as a negative? | [Bin] [EXE] | |
| | [Neg] 110010 [EXE] | 1111111111001110 |
| How is $72_8$ expressed as a negative? | [Oct] [EXE] | |
| | [Neg] 72 [EXE] | 37777777706 |
| How is $3A_{16}$ expressed as a negative? | [Hex] [EXE] | |
| | [Neg] 3A [EXE] | FFFFFFFC6 |

## ■ Basic arithmetic operations using binary, octal, decimal and hexadecimal values

| Example | Operation | Display |
|---|---|---|
| | [MODE] [−] | |
| $10111_2+11010_2=110001_2$ | [Bin] [EXE] | |
| | 10111 [+] 11010 [EXE] | 0000000000110001 |
| $B47_{16}-DF_{16}=A68_{16}$ | [Hex] [EXE] | |
| | B47 [−] DF [EXE] | 00000A68 |
| $123_8\times ABC_{16}=37AF4_{16}$ | [SHIFT] [o] 123 [×] ABC [EXE] | 00037AF4 |
| $=228084_{10}$ | [Dec] [EXE] | 228084 |
| $1F2D_{16}-100_{10}=7881_{10}$ | [SHIFT] [h] 1F2D [−] 100 [EXE] | 7881 |
| $=1EC9_{16}$ | [Hex] [EXE] | 00001EC9 |
| $7654_8\div 12_{10}$ | [Dec] [EXE] | |
| $=334.3333333_{10}$ | [SHIFT] [o] 7654 [÷] 12 [EXE] | 334 |
| $=516_8$ | [Oct] [EXE] | 00000000516 |
| ** Computation results are displayed with the decimal portion cut off.* | | |
| $1234+1EF_{16}\div 24_8=2352_8$ | [SHIFT] [d] 1234 [+] [SHIFT] [h] 1EF [÷] 24 [EXE] | 00000002352 |
| $=1258_{10}$ | [Dec] [EXE] | 1258 |
| ** For mixed basic arithmetic operations, multiplication and division are given computation priority over addition and subtraction.* | | |



## ■ Logical operations

Logical operations are performed through logical product (AND), logical sum (OR), exclusive logical sum (XOR) and negation (NOT).

| Example | Operation | Display |
|---|---|---|
| | [MODE] [−] | |
| $19_{16}$ AND $1A_{16}=18_{16}$ | [Hex] [EXE] | |
| | 19 [and] 1A [EXE] | 00000018 |
| $1110_2$ AND $36_8=1110_2$ | [Bin] [EXE] | |
| | 1110 [and] [SHIFT] [o] 36 [EXE] | 0000000000001110 |
| $23_8$ OR $61_8=63_8$ | [Oct] [EXE] | |
| | 23 [or] 61 [EXE] | 00000000063 |
| $120_{16}$ OR $1101_2=12D_{16}$ | [Hex] [EXE] | |
| | 120 [or] [SHIFT] [b] 1101 [EXE] | 0000012D |
| $1010_2$ AND ($A_{16}$ OR $7_{16}$)= | [Bin] [EXE] | |
| $1010_2$ | 1010 [and] [(] [SHIFT] [h] A [or] [SHIFT] [h] 7 [)] [EXE] | 0000000000001010 |
| $5_{16}$ XOR $3_{16}=6_{16}$ | [Hex] [EXE] | |
| | 5 [SHIFT] [xor] 3 [EXE] | 00000006 |
| $42_{10}$ XOR $B_{16}=33_{10}$ | [Dec] [EXE] | |
| | 42 [SHIFT] [xor] [SHIFT] [h] B [EXE] | 33 |
| Negation of $1234_8$ | [Oct] [EXE] | |
| | [Not] 1234 [EXE] | 37777776543 |
| Negation of $2FFFED_{16}$ | [Hex] [EXE] | |
| | [Not] 2FFFED [EXE] | FFFD0012 |

# 2-5 STATISTICAL COMPUTATIONS

## ■ Standard deviation

- Standard deviation computations are performed in the SD1 mode. (Press [MODE] [☒].)
- Before beginning computations, the statistical memories are cleared by pressing [SHIFT] followed by [Scl] ([AC] key) and then [EXE].
- Individual data is input using [DT] ([$\sqrt{\ }$] key).
- Multiple data of the same value can be input either by repeatedly pressing [DT] or by entering the data, pressing [SHIFT], followed by [;], that represents the number of times the data is repeated, and then [DT].
- Standard deviation

$$\sigma_n = \sqrt{\frac{\sum_{i=1}^{n}(x_i-\bar{x})^2}{n}} = \sqrt{\frac{\Sigma x^2-(\Sigma x)^2/n}{n}}$$

Using the entire data of a finite population to determine the standard deviation for the population.

$$\sigma_{n-1} = \sqrt{\frac{\sum_{i=1}^{n}(x_i-\bar{x})^2}{n-1}} = \sqrt{\frac{\Sigma x^2-(\Sigma x)^2/n}{n-1}}$$

Using sample data for a population to determine the standard deviation for the population.

- Mean

$$\bar{x} = \frac{\sum_{i=1}^{n} x_i}{n} = \frac{\Sigma x}{n}$$

** The values for $n$, $\Sigma x$, and $\Sigma x^2$ are stored in memories W, V, and U respectively, and can be obtained by pressing [ALPHA] followed by the memory name and then [EXE] (i.e. [ALPHA] [W] [EXE]).*



| Example | Operation | Display |
|---|---|---|
| Data 55, 54, 51, 55, 53, 53, 54, 52 | [MODE] [☒] [SHIFT] [Scl] [EXE] (Memory clear) 55 [DT] 54 [DT] 51 [DT] 55 [DT] 53 [DT] [DT] 54 [DT] 52 [DT] | 52. |
| ** Results can be obtained in any order desired.* | | |
| | (Standard deviation $\sigma_n$) [SHIFT] [$x\sigma n$] [EXE] | 1.316956719 |
| | (Standard deviation $\sigma_{n-1}$) [SHIFT] [$x\sigma n-1$] [EXE] | 1.407885953 |
| | (Mean $\bar{x}$) [SHIFT] [$\bar{x}$] [EXE] | 53.375 |
| | (Number of data $n$) [ALPHA] [W] [EXE] | 8. |
| | (Sum total $\Sigma x$) [ALPHA] [V] [EXE] | 427. |
| | (Sum of squares $\Sigma x^2$) [ALPHA] [U] [EXE] | 22805. |
| What is deviation of the unbiased variance, the difference between each datum and the mean of the above data? | (Continuing) [SHIFT] [$x\sigma n-1$] [$x^2$] [EXE] | 1.982142857 |
| | 55 [−] [SHIFT] [$\bar{x}$] [EXE] | 1.625 |
| | 54 [−] [SHIFT] [$\bar{x}$] [EXE] | 0.625 |
| | 51 [−] [SHIFT] [$\bar{x}$] [EXE] | −2.375 |
| | ⋮ | ⋮ |
| What is $\bar{x}$ and $x\sigma_{n-1}$ for the following table? | [SHIFT] [Scl] [EXE] | |
| | 110 [SHIFT] [;] 10 [DT] | 110. |
| | 130 [SHIFT] [;] 31 [DT] | 130. |
| | 150 [SHIFT] [;] 24 [DT] | 150. |
| | 170 [DT] [DT] | 170. |
| | 190 [DT] [DT] [DT] | 190. |
| | [ALPHA] [W] [EXE] | 70. |
| | [SHIFT] [$\bar{x}$] [EXE] | 137.7142857 |
| | [SHIFT] [$x\sigma n-1$] [EXE] | 18.42898069 |

| Class No. | Value | Frequency |
|---|---|---|
| 1 | 110 | 10 |
| 2 | 130 | 31 |
| 3 | 150 | 24 |
| 4 | 170 | 2 |
| 5 | 190 | 3 |

* Erroneous data clearing/correction I (correct data operation: 51 [DT])
① If 50 [DT] is entered, enter correct data after pressing [CL] ([$x^y$] key).
② If 49 [DT] was input a number of entries previously, enter correct data after pressing 49 [CL].

* Erroneous data clearing/correction II (correct data operation: 130 [SHIFT] [;] 31 [DT])
① If 120 [SHIFT] [;] is entered, enter correct data after pressing [AC].
② If 120 [SHIFT] [;] 31 is entered, enter correct data after pressing [AC].
③ If 120 [SHIFT] [;] 30 [DT] is entered, enter correct data after pressing [CL].
④ If 120 [SHIFT] [;] 30 [DT] was entered previously, enter correct data after pressing 120 [SHIFT] [;] 30 [CL].

## ■ Regression computation

- Regression computations are performed in the LR1 mode. (Press [MODE] [÷].)
- Before beginning computations, the tabulation memories are cleared by pressing [SHIFT] followed by [Scl] and then [EXE].
- Individual data are entered as $x$ data [SHIFT] [,] $y$ data [DT].
- Multiple data of the same value can be entered by repeatedly pressing [DT]. This operation can also be performed by entering $x$ data [SHIFT] [,] $y$ data [SHIFT] [;] followed by a value representing the number of times the data is repeated, and then [DT].
- If only $x$ data is repeated ($x$ data having the same value), enter [SHIFT] [,] $y$ data [DT] or [SHIFT] [,] $y$ data [SHIFT] [;] followed by a value representing the number of times the data is repeated, and then [DT].
- If only $y$ data is repeated ($y$ data having the same value), enter $x$ data [DT] or $x$ data [SHIFT] [;] followed by a value representing the total number of times the data is repeated, and then [DT].
- The regression formula is $y=A+Bx$, and constant term A and regression coefficient B are computed using the following formulas:

Regression coefficient of regression formula

$$B=\frac{n\cdot\Sigma xy-\Sigma x\cdot\Sigma y}{n\cdot\Sigma x^2-(\Sigma x)^2}$$

Constant term of regression formula

$$A=\frac{\Sigma y-B\cdot\Sigma x}{n}$$

- Estimated values $\hat{x}$ and $\hat{y}$ based on the regression formula can be computed.
- The correlation coefficient $r$ for input data can be computed using the following formula:

$$r=\frac{n\cdot\Sigma xy-\Sigma x\cdot\Sigma y}{\sqrt{\{n\cdot\Sigma x^2-(\Sigma x)^2\}\{n\cdot\Sigma y^2-(\Sigma y)^2\}}}$$

* *The values for $n, \Sigma x, \Sigma x^2, \Sigma xy, \Sigma y$, and $\Sigma y^2$ are stored in memories W, V, U, R, Q and P respectively, and can be obtained by pressing [ALPHA] followed by the memory name and then [EXE] (i.e. [ALPHA] [W] [EXE]).*



## ◆ Linear regression

| Example | Operation | Display |
|---|---|---|
| • Temperature and the length of a steel bar<br>Temp. / Length<br>10℃ / 1003mm<br>15 / 1005<br>20 / 1010<br>25 / 1011<br>30 / 1014 | [MODE] [÷] | |
| | [SHIFT] [Scl] [EXE] (Memory clear) | |
| | 10 [SHIFT] [,] 1003 [DT] | 10. |
| | 15 [SHIFT] [,] 1005 [DT] | 15. |
| | 20 [SHIFT] [,] 1010 [DT] | 20. |
| | 25 [SHIFT] [,] 1011 [DT] | 25. |
| | 30 [SHIFT] [,] 1014 [DT] | 30. |
| Using this table the regression formula and correlation coefficient can be obtained. Based on the coefficient formula, the length of the steel bar at 18°C and the temperature at 1000mm can be estimated. Furthermore, the critical coefficient ($r^2$) and covariance $\left(\frac{\Sigma xy-n\cdot\bar{x}\cdot\bar{y}}{n-1}\right)$ can also be computed. | (Constant term A)<br>[SHIFT] [A] [EXE] | 997.4 |
| | (Regression coefficient B)<br>[SHIFT] [B] [EXE] | 0.56 |
| | (Correlation coefficient r)<br>[SHIFT] [r] [EXE] | 0.9826073689 |
| | (Length at 18°C)<br>18 [SHIFT] [$\hat{y}$] [EXE] | 1007.48 |
| | (Temperature at 1000mm)<br>1000 [SHIFT] [$\hat{x}$] [EXE] | 4.642857142 |
| | (Critical coefficient)<br>[SHIFT] [r] [$x^2$] [EXE] | 0.9655172414 |
| | (Covariance) [(] [ALPHA] [R] [−] [ALPHA] [W] [×] [SHIFT] [$\hat{x}$] [×] [SHIFT] [$\hat{y}$] [)] [÷] [(] [ALPHA] [W] [−] 1 [)] [EXE] | 35. |

* Erroneous data clearing/correction (correct data operation: 10 [SHIFT] [,] 1003 [DT])
① If 11 [SHIFT] [,] 1003 is entered, enter correct data after pressing [AC].
② If 11 [SHIFT] [,] 1003 [DT] is entered, enter correct data after pressing [CL].
③ If 11 [SHIFT] [,] 1003 [DT] was entered previously, enter correct data after pressing 11 [SHIFT] [,] 1003 [CL].

## ◆ Logarithmic regression

- The regression formula is $y=A+B\cdot\ln x$. Enter the $x$ data as the logarithm (ln) of $x$, and the $y$ data inputs the same as that for linear regression.
- The same operation as with linear regression can be used to obtain the regression coefficient and for making corrections. To obtain the estimated value $\hat{y}$, [ln] $x$ [SHIFT] [$\hat{y}$] [EXE] is used, and to obtain estimated value $\hat{x}$, $y$ [SHIFT] [$\hat{x}$] [EXE] [$e^x$] [Ans] [EXE] is used.
  Furthermore, $\Sigma x$, $\Sigma x^2$, and $\Sigma xy$ are obtained as $\Sigma\ln x$, $\Sigma(\ln x)^2$, and $\Sigma\ln xy$ respectively.

| Example | Operation | Display |
|---|---|---|
| $x_i$ \| $y_i$<br>29 \| 1.6<br>50 \| 23.5<br>74 \| 38.0<br>103 \| 46.4<br>118 \| 48.9 | [MODE] [÷] | |
| | [SHIFT] [Scl] [EXE] | |
| | [ln] 29 [SHIFT] [,] 1.6 [DT] | 3.36729583 |
| | [ln] 50 [SHIFT] [,] 23.5 [DT] | 3.912023005 |
| | [ln] 74 [SHIFT] [,] 38.0 [DT] | 4.304065093 |
| | [ln] 103 [SHIFT] [,] 46.4 [DT] | 4.634728988 |
| | [ln] 118 [SHIFT] [,] 48.9 [DT] | 4.770684624 |
| Through logarithmic regression of the above data, the regression formula and correlation coefficient are obtained. Furthermore, respective estimated values $\hat{y}$ and $\hat{x}$ can be obtained for $xi$=80 and $yi$=73 using the regression formula. | (Constant term A)<br>[SHIFT] [A] [EXE] | −111.1283976 |
| | (Regression coefficient B)<br>[SHIFT] [B] [EXE] | 34.0201475 |
| | (Correlation coefficient r)<br>[SHIFT] [r] [EXE] | 0.9940139466 |
| | ($\hat{y}$ when $xi$=80)<br>[ln] 80 [SHIFT] [$\hat{y}$] [EXE] | 37.94879482 |
| | ($\hat{x}$ when $yi$=73) 73 [SHIFT] [$\hat{x}$]<br>[EXE] [$e^x$] [Ans] [EXE] | 224.1541313 |



## ◆ Exponential regression

- The regression formula is $y=A\cdot e^{B\cdot x}$($\ln y=\ln A+Bx$). Enter the $y$ data as the logarithm of $y$(ln), and the $x$ data the same as that for linear regression.
- Correction is performed the same as in linear regression. Constant term A is obtained by [$e^x$] [SHIFT] [A] [EXE], estimated value $\hat{y}$ is obtained by $x$ [SHIFT] [$\hat{y}$] [EXE] [$e^x$] [Ans] [EXE], and estimated value $\hat{x}$ is obtained by [ln] $y$ [SHIFT] [$\hat{x}$] [EXE]. $\Sigma y$, $\Sigma y^2$ and $\Sigma xy$ are obtained by $\Sigma\ln y$, $\Sigma(\ln y)^2$ and $\Sigma x\cdot\ln y$ respectively.

| Example | Operation | Display |
|---|---|---|
| $x_i$ \| $y_i$<br>6.9 \| 21.4<br>12.9 \| 15.7<br>19.8 \| 12.1<br>26.7 \| 8.5<br>35.1 \| 5.2 | [MODE] [÷] | |
| | [SHIFT] [Scl] [EXE] | |
| | 6.9 [SHIFT] [,] [ln] 21.4 [DT] | 6.9 |
| | 12.9 [SHIFT] [,] [ln] 15.7 [DT] | 12.9 |
| | 19.8 [SHIFT] [,] [ln] 12.1 [DT] | 19.8 |
| | 26.7 [SHIFT] [,] [ln] 8.5 [DT] | 26.7 |
| | 35.1 [SHIFT] [,] [ln] 5.2 [DT] | 35.1 |
| Through exponential regression of the above data, the regression formula and correlation coefficient are obtained. Furthermore, the regression formula is used to obtain the respective estimated values $\hat{y}$ and $\hat{x}$ when $xi$=16 and $yi$=20. | (Constant term A)<br>[$e^x$] [SHIFT] [A] [EXE] | 30.49758743 |
| | (Regression coefficient B)<br>[SHIFT] [B] [EXE] | −0.04920370831 |
| | (Correlation coefficient r)<br>[SHIFT] [r] [EXE] | −0.997247352 |
| | ($\hat{y}$ when $xi$=16) 16 [SHIFT] [$\hat{y}$]<br>[EXE] [$e^x$] [Ans] [EXE] | 13.87915739 |
| | ($\hat{x}$ when $yi$=20)<br>[ln] 20 [SHIFT] [$\hat{x}$] [EXE] | 8.574868046 |

## ◆ Power regression

- The regression formula is $y = A \cdot x^B (\ln y = \ln A + B \ln x)$. Enter both data $x$ and $y$ as logarithms (ln).
- Correction is performed the same as in linear regression. Constant term A is obtained by [$e^x$] [SHIFT] [A] [EXE], estimated value $\hat{y}$ is obtained by [ln] $x$ [SHIFT] [$\hat{y}$] [EXE] [$e^x$] [Ans] [EXE], and estimated value $\hat{x}$ is obtained by [ln] $y$ [SHIFT] [$\hat{x}$] [EXE] [$e^x$] [Ans] [EXE]. $\Sigma x, \Sigma x^2, \Sigma y, \Sigma y^2$ and $\Sigma xy$ are obtained by $\Sigma \ln x, \Sigma (\ln x)^2, \Sigma \ln y, \Sigma (\ln y)^2$, and $\Sigma \ln x \cdot \ln y$ respectively.

| Example | Operation | Display |
|---|---|---|
| $x_i$ \| $y_i$<br>28 \| 2410<br>30 \| 3033<br>33 \| 3895<br>35 \| 4491<br>38 \| 5717 | [MODE] [÷]<br>[SHIFT] [Scl] [EXE] | |
| | [ln] 28 [SHIFT] [,] [ln] 2410 [DT] | 3.33220451 |
| | [ln] 30 [SHIFT] [,] [ln] 3033 [DT] | 3.401197382 |
| | [ln] 33 [SHIFT] [,] [ln] 3895 [DT] | 3.496507561 |
| | [ln] 35 [SHIFT] [,] [ln] 4491 [DT] | 3.555348061 |
| | [ln] 38 [SHIFT] [,] [ln] 5717 [DT] | 3.63758616 |
| Through power regression of the above data, the regression formula and correlation coefficient are obtained. Furthermore, the regression formula is used to obtain the respective estimated values $\hat{x}$ and $\hat{y}$ when $xi$=40 and $yi$=1000. | (Constant term A)<br>[$e^x$] [SHIFT] [A] [EXE] | 0.2388010724 |
| | (Regression coefficient B)<br>[SHIFT] [B] [EXE] | 2.771866153 |
| | (Correlation coefficient r)<br>[SHIFT] [r] [EXE] | 0.9989062542 |
| | ($\hat{y}$ when $xi$=40)<br>[ln] 40 [SHIFT] [$\hat{y}$] [EXE]<br>[$e^x$] [Ans] [EXE] | 6587.67458 |
| | ($\hat{x}$ when $yi$=1000)<br>[ln] 1000 [SHIFT] [$\hat{x}$] [EXE]<br>[$e^x$] [Ans] [EXE] | 20.2622568 |



# 3. GRAPHS

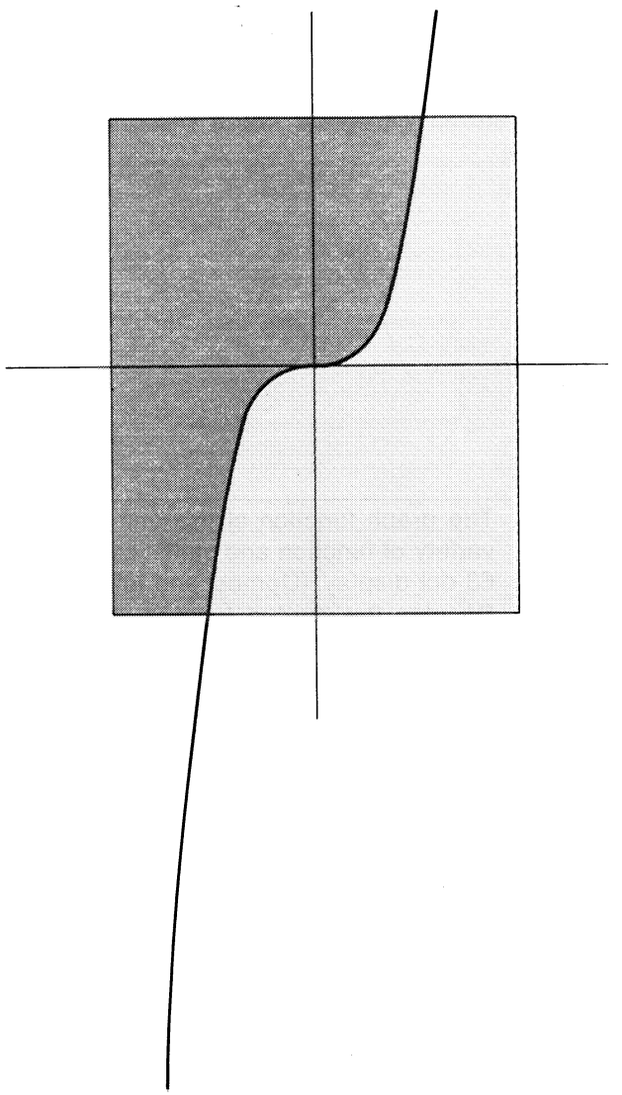

The graph function of this unit makes it possible to produce a wide variety of function and statistical graphs quickly and easily on a 95 × 63 dot display. (Upmost and leftmost lines are not used.)
Besides the built-in function graphs, a generous selection of functions can also be input for graphic representation.
Graph commands can be used manually or in programs, but here all examples will be centered around manual operations. Programmed graphs are identical to those produced manually, and details can be found on page 132.

* *Some of keys used for the operation examples in this manual show alphabetic character key markings. On the actual unit, alphabetic characters are marked under the keys by which they are represented.*



# 3-1 BUILT-IN FUNCTION GRAPHS

The COMP mode of the RUN mode should be used when graphing functions. Some graphs can be produced in the SD and LR modes, but certain graphs cannot be produced in these modes. The Base-n mode cannot be used for graphs. This unit contains a total of 20 built-in graphs making it possible to produce the graphs of basic functions.

- sin
- cos
- tan
- $\sin^{-1}$
- $\cos^{-1}$
- $\tan^{-1}$
- sinh
- cosh
- tanh
- $\sinh^{-1}$
- $\cosh^{-1}$
- $\tanh^{-1}$
- $\sqrt{\ }$
- $x^2$
- log
- ln
- $10^x$
- $e^x$
- $x^{-1}$
- $\sqrt[3]{\ }$

Any time a built-in graph is executed, the ranges (see page 59) are automatically set to their optimum values, and any graph previously on the display is cleared.

**Ex. 1) Sine curve**

[MODE] [+]
[Graph] [sin] [EXE]



**Ex. 2) $y = \frac{1}{x}$ graph**

[Graph] [$x^{-1}$] [EXE]



## ■ Overwriting built-in function graphs

Two or more different built-in function graphs can be written together on the same display. Since the range for the first graph is automatically set, all subsequent graphs on the same display are produced according to the range of the first graph.

The first graph is produced by using the previously mentioned operation ([Graph] [function key] [EXE]).

Subsequent graphs are produced using the variable X in the operation [Graph] [function key] [ALPHA] [X] [EXE] ([X] : [×] key). By inputting [ALPHA] [X] after the function key, the range is unchanged and the next graph is produced without clearing the existing display. (See page 65 for details.)

**Ex. Overwrite the graph for $y=\cosh x$ on the graph for $y \sinh x$.**

First, draw the graph for $y=\sinh x$.

[Graph] [hyp] [sin] [EXE]



Next, draw the graph for $y=\cosh x$ without changing the existing range.

[Graph] [hyp] [cos] [ALPHA] [X] [EXE]



**〈Note〉**

Built-in function graphs cannot be used in multistatements (see page 36) and cannot be written into programs.



# 3-2 USER GENERATED GRAPHS

Built-in function graphs can also be used in combination with each other. Graphing a formula such as $y=2x^2+3x-5$ makes it possible to visually represent the solution.

Unlike built-in functions, the ranges of user generated graphs are not set automatically, so graphs produced outside of the display range do not appear on the display.

## ■ Ranges

The ranges of the $x$ and $y$-axes, as well as the scale (distance between points) for both axes can be set or checked using the [Range] key.

● Ranges contents

Ranges consist of Xmin ($x$-axis minimum value), Xmax ($x$-axis maximum value), Xscl ($x$-axis scale), Ymin ($y$-axis minimum value), Ymax ($y$-axis maximum value), and Yscl ($y$-axis scale).




● Range display

Ranges are displayed as shown on the right when the [Range] key is pressed. The range value at the cursor position can be changed.




* Values shown here are only an example. Actual values may differ.

● Range setting

Range settings are made from the current cursor position and proceed in the order of Xmin→Xmax→Xscl→Ymin→Ymax→Yscl. Input a numeric value at the cursor position and then press [EXE]. Any value input while the cursor is at the first (extreme left) digit of the displayed value will replace the displayed value when [EXE] is pressed.

If the [▷] key is used to move the cursor to the second or subsequent digit of the displayed value, only the portion of the displayed value starting from the cursor position will be affected by the new input when [EXE] is pressed.

Here, let's try changing the currently set range values to those listed below:

| | | | | | |
|---|---|---|---|---|---|
| Xmin | → | 0 | Ymin | → | −5 |
| Xmax | → | 5 | Ymax | → | 15 |
| Xscl | → | 1 | Yscl | → | 5 |

① Input 0 for Xmin.

0 [EXE]




② The Xmax value is the same, so simply press [EXE].

[EXE]
([▽] key can also be used.)




③ Input 1 for Xscl.

1 [EXE]




④ To change Ymin to −5, use the [▷] key to move the cursor one digit to the right and input 5.

[▷] 5 [EXE]






⑤ To change Ymax to 15, use the [▷] key to move the cursor one digit to the right and input 5.

[▷] 5 [EXE]




⑥ The Yscl value is the same, so simply press [EXE].

[EXE]

Once all settings are complete, the display that was shown before pressing the [Range] key is retrieved.
Press the [Range] key again to confirm whether settings are correct.

[Range]




The [△] and [▽] keys can be used to move the cursor from line to line in the range display without affecting the range values. The cursor can only be moved upwards as far as Xmin, and downwards as far as Yscl. Press [Range] to return to the display that was shown before entering the range display.

* *The input range for graph ranges is $-9.9999_E+98$ through $9.99999_E+98$.*
* *Only numeric value keys from [0] through [9], [·], [EXP], [(−)], [◁], [▷], [△], [▽], and [Range] can be used during range display. Other key operation is ignored.*
  *(Use the [(−)] key for negative value input.)*
* *To completely change an existing range setting, ensure that the cursor is located at the first digit (all the way to the left) of the displayed value. If the cursor has been moved to another digit of the value, only the portion of the value from the cursor position (to the right) will be changed. The portion of the value to the left of the cursor will remain unchanged.*

**Ex.**

[▷]
3
[EXE]

| |
|---|
| 25 |
| −25 |
| −35 |
| −3 |

* *Values up to nine significant digits can be input.*
  *Values less than $10^{-2}$ and equal to or greater than $10^{8}$ are displayed with a 6-digit mantissa (including negative sign) and a 2-digit exponent.*
* *If input is improper (outside the allowable calculation range or inputting only a negative sign), the existing value will remain unchanged. (The improper input, however, will be temporarily displayed.)*
* *Inputting 0 for Xscl or Yscl does not set any scale.*
* *Inputting a maximum value that is less than the minimum value will reverse the respective axis.*

**Ex.** Xmin : 5
Xmax : −5

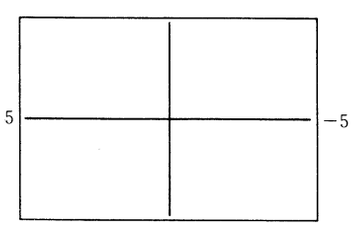




* *If the maximum and minimum values of an axis are equal, an error (Ma ERROR) will be generated when an attempt is made to produce a graph.*
* *When a range setting is used that does not allow display of the axes, the scale for the $y$-axis is indicated on either the left or right edge of the display, while that for the $x$-axis is indicated on either the top or bottom edge. (In both cases, the location of the scale is the edge which is closest to the origin (0, 0)).*
* *When range values are changed (reset), the graph display is cleared and the newly set axes only are displayed.*
* *Range settings may cause irregular scale spacing.*
* *If the range is set too wide, the graph produced may not fit on the display.*
* *Points of deflection sometimes exceed the capabilities of the display with graphs that change drastically as they approach the point of deflection.*
* *An Ma ERROR may be generated when a range value is specified that exceeds the allowable range.*

**Ex.** Xmin $9._E99$
Xmax $9.9_E99$
Xscl $1._E99$ ⇒ Falls outside of range.
⋮

* *An Ma ERROR is generated when ranges are extremely narrow.*

● **Range reset**

Range values are reset to their initial values by pressing [SHIFT] [DEL] during range display.

[Range] (Not required when range display is already being shown.)
[SHIFT] [DEL]

```
Range
Xmin:−4.7
 max:4.7
 scl:1.
Ymin:−3.1
 max:3.1
 scl:1.
```

〈**Reference**〉

Range settings are performed within programs using the following format:

[Range] Xmin value, Xmax value, Xscl value, Ymin value, Ymax value, Yscl value

Up to six data items are programmed after the [Range] command. When less than six items are programmed, range setting is performed in the order from the beginning of the above format.

## ■ User generated function graphs

After performing range settings, user generated graphs can be drawn simply by entering the function (formula) after pressing [Graph].
Here, let's try drawing a graph for $y=2x^2+3x-4$.
Set the ranges to the values shown below.

```
Range
Xmin:-5.
 max:5.
 scl:1.
Ymin:-10.
 max:10.
 scl:2.
```

Input the functional formula after pressing the [Graph] key.

[Graph] 2 [ALPHA] [X] [$x^2$] [+]
3 [ALPHA] [X] [−] 4 [EXE]



The result produces a visual representation of the formula.

## ■ Function graph overwrite

Two or more function graphs can be overwritten which makes it easy to determine intersection points and solutions that satisfy all the equations.

**Ex. Here, let's find the intersection points of the previously used $y=2x^2+3x-4$ and $y=2x+3$.**

First, clear the graph screen in preparation for the first graph.

[Cls] [EXE]
[Graph] 2 [ALPHA] [X] [$x^2$] [+]
3 [ALPHA] [X] [−] 4 [EXE]





Next, overwrite the graph for $y=2x+3$.

[Graph] 2 [ALPHA] [X] [+] 3 [EXE]



In this way it can be easily seen that there are two intersections for the two function graphs. The approximate coordinates for these two intersections can be found using the trace function described in the following section.

* *Be sure to input variable X ([ALPHA] [X]) into the function when using built-in graphs for overwrite.*
*If variable X is not included in the second formula, the second graph is produced after clearing the first graph.*

## ■ Trace function

The pointer (blinking dot) can be moved using the cursor keys ([◁] [▷]) to determine the $x$ and $y$ coordinates of any point on a graph.
After a graph is produced on the display, press [Trace] and the point will appear at the extreme left plot of the graph. The $x$-coordinate value (X=. . . .) will appear on the bottom line of the display. The pointer can be moved using the [◁] and [▷] cursor keys, and the $x$-coordinate value changes as the pointer moves. To change from the $x$-coordinate to the $y$-coordinate value, press [SHIFT] [X↔Y]. The displayed coordinate switches between $x$ and $y$ with each press of [SHIFT] [X↔Y].

**Ex. Determine the points of intersection of the graphs for $y=x^2-3$ and $y=-x+2$.**

The range values should be set as follows:

```
Range
Xmin:-5.
 max:5.
 scl:1.
Ymin:-10.
 max:10.
 scl:2.
```

First, draw the graph for $y=x^2-3$.

[Graph] [ALPHA] [X] [$x^2$] [−] 3 [EXE]



Next, draw the graph for $y=-x+2$.

[Graph] [(−)] [ALPHA] [X] [+] 2 [EXE]



Finally, let's use the trace function.

[Trace]




The pointer appears at the extreme left plot of the graph. The [▷] key moves the pointer to the right along the graph. Each press of [▷] moves the pointer one point, while holding it down causes continuous movement.

[▷] ~
(Hold down)






Hold [▷] down until the pointer reaches the intersection of the two graphs. Note the $x$-coordinate value, and then press [SHIFT] [X↔Y] for the $y$-coordinate value.

[SHIFT] [X↔Y]




In this way, it can be determined that the coordinates of the first intersection are $x=-2.765957447$ and $y=4.765957447$.

* *The pointer does not move at the fixed distance because the distance is located along the dots of the display. Therefore, the $x$-$y$ coordinates for the point of intersection are approximate values.*

Similarly, press [▷] to move the pointer to the next point of intersection.

[▷] ~




This time, press [SHIFT] [X↔Y] to display the $x$-coordinate value.

[SHIFT] [X↔Y]




Using the operations outlined above, the approximate $x$-$y$ coordinates for points along graphs can be obtained.

* *The trace function can only be used immediately after a graph is drawn. This function cannot be used if other calculations or operations (except [M Disp], [Range], or [G↔T]) have been employed after a graph has been drawn.*
* *The $x$-$y$ coordinate values at the bottom of the display consist of a 10-digit mantissa or a 5-digit mantissa plus a 2-digit exponent.*

* *The trace function cannot be written into a program.*
* *The trace function can be used during a "—DISP—" display.*
* *When the format* [Graph] *formula* ◢ [Graph] *formula* [EXE] *is executed and a graph is drawn by pressing* [EXE] *directly after executing the trace function during halt status, the previous coordinate value remains on the display. After the trace function is executed and the text display is brought up using the* [G↔T] *key, pressing* [EXE] *causes the next graph to appear and the coordinate value to clear.*
*Examine the above using* [Graph] [ALPHA] [X] [$x^2$] [SHIFT] ◢ [Graph] 2 [ALPHA] [X] ⊞ 5

## ■ Plot function

The plot function is used to mark a point on the screen of a graph display. The point can be moved left, right, up and down using the cursor keys, and the coordinates for the graph displayed can be read. Two points can also be connected by a straight line (see Line function, page 71).

Press [Plot] and specify the $x$ and $y$-coordinates after the "Plot" message.

**Ex. Plot a point at $x$=2 and $y$=2 on the axes created by the following range values:**

```
Range
Xmin:−5.
 max:5.
 scl:1.
Ymin:−10.
 max:10.
 scl:2.
```

Blinking dot

[Plot] 2 [SHIFT] [,] 2 [EXE]




$x$-coordinate value display

The blinking pointer is positioned at the specified coordinates.

* *Due to limitations caused by the resolution of the display, the actual position of the pointer can only be approximate.*



The pointer can be moved left, right, up, and down using the cursor keys. The current position of the pointer is always shown at the bottom of the display.

[▷] [▷] [▷] [▷] [▷]




To find the $y$-coordinate value:

[SHIFT] [X↔Y]




[△] [△] [△] [△] [△]




Now, inputting a new coordinate value causes the new pointer to blink without clearing the present pointer.

[Plot] 3.5 [SHIFT] [,] 6.5 [EXE]



If $x$-$y$ coordinates are not specified for the plot function, the pointer appears at the center of the screen.
Set the following range values:

```
Range
Xmin:-2.
 max:5.
 scl:1.
Ymin:-2.
 max:10.
 scl:2.
```

[Plot] [EXE]




To find the Y-coordinate value:

[SHIFT] [X↔Y]






** Attempting to plot a point outside of the preset range is disregarded.*
** The $x$ and $y$-coordinates of the pointer used in the plot function are respectively stored in the X memory and Y memory.*
** A blinking pointer becomes a fixed point (not blinking) when a new pointer is created.*

## ■ Line function

The line function makes it possible to connect two points (including the blinking pointer ) created with the plot function with a straight line. With this function, user generated lines can be added to graphs to make them easier to read.

**Ex. Draw perpendiculars from point (2,0) on the $x$-axis to its intersection with the graph for $y=3x$. Then draw a line from the point of intersection to the $y$-axis.**

The range values for the graph are as follows:

```
Range
Xmin:-2.
 max:5.
 scl:1.
Ymin:-2.
 max:10.
 scl:2.
```

Clear the graph display and draw the graph for $y=3x$.

[Cls] [EXE]
[Graph] 3 [ALPHA] [X] [EXE]



Next, use the plot function to locate a point at (2,0).

[Plot] 2 [SHIFT] [,] 0 [EXE]



Now plot a point at (2,0) again and use the cursor key ([△]) to move the pointer up to the point on the graph ($y=3x$).

[Plot] 2 [SHIFT] [,] 0 [EXE]

[△] ~ [△]

(Move the pointer up to the point on the graph for $y=3x$.)




Draw a line using the line function.

[Line] [EXE]



Next, a perpendicular will be drawn from the same point on the graph to the $y$-axis. First, plot the point on the graph and use the cursor key ([◁]) to move the pointer to the $y$-axis. This can be accomplished using Plot X, Y since the $x$-$y$ coordinates of the point on the graph are stored in the X and Y memories.

[Plot] [ALPHA] [X] [SHIFT]

[,] [ALPHA] [Y] [EXE]




[◁] ~ [◁]

(Move the pointer to the $y$-axis.)






[Line] [EXE]



** The line function can only be used to draw lines between the blinking pointer and a fixed point created using the plot function.*

## ■ Factor function

The factor function is used to magnify or reduce the range of a graph centered around the blinking pointer provided with the plot function or trace function.

For magnification, the minimum value and maximum value of the range are multiplied by $1/n$. For reduction, they are multiplied by $n$.

● Operation

[Factor] $m$ [SHIFT] [,] $n$ [EXE] ····· $x$ is magnified $m$ times and $y$ is magnified $n$ times centered around the pointer.

[Factor] $n$ [EXE] ····· $x$ and $y$ are both magnified $n$ times centered around the pointer.

The graph display is cleared when the factor function is executed because of changes in the range values.

**Ex. After setting the range values specified below, magnify the graph for $y=\sin x$ centered on the origin.**

```
Range
Xmin:-360.
 max:360.
 scl:180.
Ymin:-1.6
 max:1.6
 scl:0.5
```

Draw the graph for $y=\sin x$ after setting the range values.

[Graph] [sin] [ALPHA] [X] [EXE]



Now use the plot function to blink the pointer at the origin of the graph and then use the factor function to magnify the graph 1.5 times.

[Plot] [:] [Factor] 1.5 [:]
[Graph] [sin] [ALPHA] [X] [EXE]

* *The multistatement function is used to produce the graph in a single step.*



The following shows the resulting range values:

```
Range
Xmin:-240.
 max:240.
 scl:180.
Ymin:-1.06666667
 max:1.06666667
 scl:0.5
```

This indicates that the range values for the $x$ and $y$-axes are equal to 1/1.5 of their original values.

Now let's try magnifying the graph another 1.5 times.
This time, it is not necessary to input any further commands. The existing graph is magnified by simply pressing [EXE]. Since the original magnification was accomplished using the multistatement function, the replay function becomes operational.

[EXE]





Now the graph is so large that little of it remains on the display. Let's try to reduce the graph to half its present size to make it more manageable.

The replay function is used to change the magnification value from 1.5 to 0.5.

[▷]

```
Plot :Factor 1.5
:Graph Y=sin X
```

[▷] [▷] [▷]

```
Plot :Factor 1.5
:Graph Y=sin X
```

0

```
Plot :Factor 0.5
:Graph Y=sin X
```

Now execute the function.

[EXE]



The following display shows the new range values:

[Range]

```
Range
Xmin:-320.
 max:320.
 scl:180.
Ymin:-1.42222223
 max:1.42222221
 scl:0.5
```

To reduce the graph by half again:

[EXE]



Now let's double the $x$-axis and increase the $y$-axis by 1.5 times.

[▷]

```
Plot :Factor 0.5
:Graph Y=sin X
```

[▷] [▷] [▷] [INS]
2 [SHIFT] [,]
[INS] 1

```
Plot :Factor 2,1
.5:Graph Y=sin X
```

Now execute the function.

[EXE]





Using the operations outlined in this section, graphs can be magnified or reduced. In the examples given here, the graphs were magnified and reduced centered around the origin, but any pointer on the display can be used as a central point for magnification and reduction.

## ■ Instant factor function

The instant factor function can be used to quickly magnify the size of a graph by $2^n$ or reduce it by $1/2^n$. The change in size is centered at the pointer when it is displayed, and at the center of the graph when the pointer is not displayed.

● Operation

[SHIFT] [×] ... 2X magnification in both $x$ and $y$ directions. Pressing [SHIFT] [×] again magnifies by $2^2$ or 4X, and a third press magnifies by $2^3$ or 8X.

[SHIFT] [÷] ... 1/2 reduction in both $x$ and $y$ directions. Pressing [SHIFT] [÷] again reduces by $1/2^2$ or 1/4, and a third press reduces by $1/2^3$ or 1/8.

Since range contents are switched to their inverse proportions, the graphic display is cleared each time the instant factor function is executed.

Ex. Graph $y=\cos x$ using the built-in function, and change the size by 2X and 1/2.

[Graph] [sin] [EXE]



Now magnify the graph 2 X at the center of the display.

[SHIFT] [×]



Next, reduce the original $y=\cos x$ graph by 1/2.

[SHIFT] [÷] (Returns to original graph.)

[SHIFT] [÷]



In the above examples, the changes in the graph size were performed at the center of the display. If the pointer is shown on the display, the magnification/reduction is applied centered at the pointer.



# 3-3 GRAPH FUNCTION APPLICATIONS

Even complex equations can be graphically represented. A number of graphs for the equations will be presented in this section.

**Ex. 1) Draw the graph for the third degree equation, $y=x^3-9x^2+27x+50$.**

The range values for the graph are given on the right.

```
Range
Xmin:-5.
 max:10.
 scl:2.
Ymin:-30.
 max:150.
 scl:20.
```

**Operation**

[Cls] [EXE]

[Graph] [ALPHA] [X] [$x^y$] 3 [−] 9 [ALPHA] [X] [$x^2$] [+]
27 [ALPHA] [X] [+] 50 [EXE]



**Ex. 2) Draw the graph for the polynomial equation, $y=x^6+4x^5-54x^4-160x^3+641x^2+828x-1260$.**

The range values for the graph are given on the right.

```
Range
Xmin:-10.
 max:10.
 scl:2.
Ymin:-8000.
 max:8000.
 scl:2000.
```

### Operation

[Cls] [EXE]
[Graph] [ALPHA] [X] [$x^y$] 6 [+] 4 [ALPHA] [X] [$x^y$] 5
[−] 54 [ALPHA] [X] [$x^y$] 4 [−] 160 [ALPHA] [X] [$x^y$]
3 [+] 641 [ALPHA] [X] [$x^2$] [+] 828 [ALPHA] [X] [−]
1260 [EXE]



**Ex. 3)** **Find the maximum and minimum for the equation, $y=x^4+4x^3-36x^2-160x+300$.**

* *If this equation is graphed, the minimum and maximum can be easily understood without differentiation.*

The range values for the graph are given on the right.

```
Range
Xmin:−10.
 max:10.
 scl:2.
Ymin:−600.
 max:600.
 scl:200
```

### Operation

[Cls] [EXE]
[Graph] [ALPHA] [X] [$x^y$] 4 [+] 4 [ALPHA] [X] [$x^y$] 3 [−]
36 [ALPHA] [X] [$x^2$] [−] 160 [ALPHA] [X] [+]
300 [EXE]



**Ex. 4)** **Determine whether the two graphs for equations, $y=x^3-3x^2-6x-16$ and $y=3x-11$ have a point of tangency.**

The range values for the graphs are given on the right.

```
Range
Xmin:−10.
 max:10.
 scl:2.
Ymin:−60.
 max:40.
 scl:10.
```



### Operation

[Cls] [EXE]
[Graph] [ALPHA] [X] [$x^y$] 3 [−] 3 [ALPHA] [X] [$x^2$] [−]
6 [ALPHA] [X] [−] 16 [EXE]
[Graph] 3 [ALPHA] [X] [−] 11 [EXE]



# 3-4 SINGLE VARIABLE STATISTICAL GRAPHS

- Single variable statistical graphs are drawn in the SD2 mode ([SHIFT] [MODE] [☒]).
- Bar graphs, line graphs, and normal distribution curves can be produced as single variable statistical graphs.
- Function graphs are also possible in the SD2 mode, so graphs of theoretical values and graphs of actual values can be overwritten.
  ** Abs and $\sqrt[3]{\ }$ cannot be used in the SD2 mode.*
- Number of data is determined by expanding memories.
- Graphs are drawn with the $x$-coordinate as the data range and the $y$-coordinate as the number of items (frequency) of each data.
- The [DT] key ([$\sqrt{\ }$]) is used for data input.
- The [CL] key ([$x^y$]) is used for data correction.

## ■ Drawing single variable statistical graphs

- Procedure

① Specify the SD2 mode ([SHIFT] [MODE] [☒]).
② Set the range values ([Range]).
③ Expand the memory in accordance with the number of bars ([MODE] [·] $n$ [EXE]).
④ Clear the statistical memories ([SHIFT] [Scl] [EXE]).
⑤ Input data (Data [DT] ([$\sqrt{\ }$])).
⑥ Draw the graph.
- Bar graph..... [Graph] [EXE]
- Line graph..... [Graph] [Line] [EXE]
- Normal distribution curve..... [Graph] [Line] 1 [EXE]

** Data input method in step 5 is the same as that for standard deviation computations (see page 48).*



**Ex. Use the following data to draw a ranked graph.**

| Rank No. | Rank | Frequency |
|---|---|---|
| 1 | 0 | 1 |
| 2 | 10 | 3 |
| 3 | 20 | 2 |
| 4 | 30 | 2 |
| 5 | 40 | 3 |
| 6 | 50 | 5 |
| 7 | 60 | 6 |
| 8 | 70 | 8 |
| 9 | 80 | 15 |
| 10 | 90 | 9 |
| 11 | 100 | 2 |

Perform graph preparation in accordance with the following procedure:

① Specify the SD2 mode ([SHIFT] [MODE] [☒]).
② Set the range values.
The highest value to be plotted on the $x$-axis is 100, but for graphing purposes the maximum value (Xmax) is set at 110. (The general rule is that the minimum value should be equal to or greater than the minimum range value and the maximum value should be less than the maximum range value, so here we set the $x$-axis ranges to 0 through 110.)
Ymax value is set to 20 for the $y$-axis because the maximum frequency is 15.

```
Range
Xmin:0.
 max:110.
 scl:10.
Ymin:0.
 max:20.
 scl:2.
```

③ Since the number of bars is 11(0～9, 10～19, 20～29. . . . 100～109) expand memories by 11.

[MODE] [·] 11 [EXE]

```
** Defm **

 Program :  0

  Memory :37

 3918 Bytes Free
```

④ Clear the statistical memory.

[SHIFT] [Scl] [EXE]

⑤ Input the data.

0 [DT] 10 [DT] [DT] [DT] 20 [DT] [DT] 30 [DT] [DT] 40 [DT] [DT] [DT]
50 [SHIFT] [;] 5 [DT] 60 [SHIFT] [;] 6 [DT] 70 [SHIFT] [;] 8 [DT]
80 [SHIFT] [;] 15 [DT] 90 [SHIFT] [;] 9 [DT] 100 [DT] [DT]

⑥ First, draw a bar graph.

[Graph] [EXE]



Next, overwrite a line graph.

[Graph] [Line] [EXE]



● Finally, draw a normal distribution curve. Since the $y$-axis value is relatively small when compared with the bar and line graphs, the same range values cannot be used. Change the range values to those shown below.

```
Range
Xmin:0.
 max:110.
 scl:10.
Ymin:0.
 max:0.05
 scl:0.01
```

[Graph] [Line] 1 [EXE]

Inputting the number 1 causes a normal distribution curve to be drawn.





## ⟨Summary⟩

- Be sure to expand the memory in accordance with the number of bars. A Mem-error is generated if memory expansion is not performed.
- If the number of expanded memories is changed during data input, the number of data divisions also changes, thus making it impossible to produce a proper graph.
- When a value that exceeds the preset ranges is input, it is input to the statistical memory, but not into the graph memory.
- When more data than the preset $y$-axis range is input, the bar graph is drawn to the upper limit of the display, and the points outside the range cannot be connected.
- The formula used for normal distribution curves is:

$$y = \frac{1}{\sqrt{2\pi}\,\sigma} e^{-\frac{(x-m)^2}{2\sigma^2}}$$

** Keyboard designation of $\sigma$ is $x\sigma n$. $m$ is $\bar{x}$.*

- The following must be true in the case of range settings: Xmin < Xmax.
- After a bar or line graph is executed, "done" is displayed in the text display.

# 3-5 PAIRED VARIABLE STATISTICAL GRAPHS

- Paired variable graphs are drawn in the LR2 mode ( SHIFT MODE ÷ ).
- Paired variable graphs can be drawn as regression lines.
- Standard function graphs can also be drawn in the LR2 mode, so theoretical graphs, data distribution and regression line graphs can be overwritten.
- After data input in the LR2 mode, points are displayed immediately, and data is input to the statistical memory.
- When a value that exceeds the preset range is input, it is input to the statistical memory, the point is not displayed.
- Data is input using the DT ( $\sqrt{\ }$ ) key in the following format: $x$ data SHIFT , $y$ data SHIFT ; frequency DT.
- The CL ( $x^y$ ) key is used to edit data after input is complete, but points that are produced on the display are not cleared. (Point appears even when data is corrected by the CL key).
- Points on the display cannot be retrieved if the display is cleared ( Cls EXE ).

## ■ Drawing paired variable statistical graphs

- Procedure

① Specify the LR2 mode ( SHIFT MODE ÷ ).
② Set the range values ( Range ).
③ Clear the statistical memory ( SHIFT Scl EXE ).
④ Input data ( $x$ data SHIFT , $y$ data SHIFT ; frequency DT ).
⑤ Draw the graph ( Graph Line 1 EXE ).

** Data input method in step 4 is the same as that for Regression computation (Page 50).*

**Ex. Perform linear regression on the following data and draw a regression line graph.**

| $x_i$ | $y_i$ |
|---|---|
| −9 | −2 |
| −5 | −1 |
| −3 | 2 |
| 1 | 3 |
| 4 | 5 |
| 7 | 8 |



① Specify the LR2 mode ( SHIFT MODE ÷ ).
② Set the range values to those shown in the table.

```
Range
Xmin:−10.
 max:10.
 scl:2.
Ymin:−5.
 max:15.
 scl:5.
```

** According to the general rule of the $x$-axis range values, the values for $x$ are: $-10 \leqq x < 10$.*

③ Clear the statistical memories.
SHIFT Scl EXE

④ Input the data.

(−) 9 SHIFT , (−) 2 DT
(−) 5 SHIFT , (−) 1 DT
(−) 3 SHIFT , 2 DT
1 SHIFT , 3 DT
4 SHIFT , 5 DT
7 SHIFT , 8 DT



⑤ Draw the graph.
Graph Line 1 EXE



** When data is input that is outside of the preset range values, a point does not appear.*
** An Ma ERROR is generated when there is no data input and the following key operation is performed:* Graph Line 1 EXE.
** The following must be true in the case of range settings: Xmin< Xmax.*

# 4.
# PROGRAM COMPUTATIONS

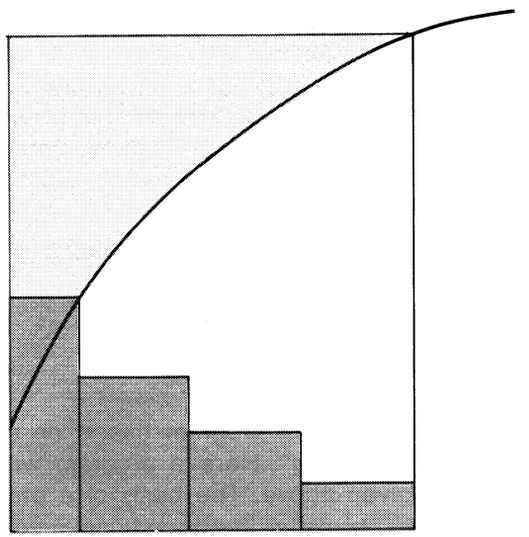

# 4-1 WHAT IS A PROGRAM?

This unit has a built-in program feature that facilitates repeat computations. The program feature is used for the consecutive execution of formulas in the same way as the "multistatement" feature is used in manual computations. Programs will be discussed here with the aid of illustrative examples.

**EXAMPLE:**
**Find the surface area and volume of a regular octahedron when the length of one side is given.**




| Length of one side (A) | Surface area (S) | Volume (V) |
|---|---|---|
| 10cm | (  )cm² | (  )cm³ |
| 7 | (  ) | (  ) |
| 15 | (  ) | (  ) |

* Fill in the parentheses.

## ① Formulas

For a surface area S, volume V and one side A, S and V for a regular octahedron are defined as:

$S=2\sqrt{3}A^2$  $V=\frac{\sqrt{2}}{3}A^3$

## ② Programming

Creating a program based on computation formulas is known as "programming". Here a program will be created based upon the formulas given above. The basis of a program is manual computation, so first of all, consider the operational method used for manual computation.

Surface area (S): 2 ⊠ √ 3 ⊠ Numeric value A $x^2$ EXE

Volume (V): √ 2 ÷ 3 ⊠ Numeric value A $x^y$ 3 EXE

In the above example, numeric value A is used twice, so it should make sense to store it in memory A before the computations.

Numeric value A → ALPHA A EXE
2 ⊠ √ 3 ⊠ ALPHA A $x^2$ EXE ..... S
√ 2 ÷ 3 ⊠ ALPHA A $x^y$ 3 EXE ..... V



With this unit, the operations performed for manual computations can be used as they are in a program. Once program execution starts, it will continue in order without stopping. Therefore, commands are required to request the input of data and to display results. The command to request data input is "?", while that to display results is "◢".
A "?" within a program will cause execution to stop temporarily and a "?" to appear on the display as the unit waits for data input. This command cannot be used independently, and is used together with → as " ? → memory name". To store a numeric value in memory A, for example:

?→A

When "?" is displayed, calculation commands and numeric values can be input within 111 steps.
The "◢" command causes program execution to stop temporarily and the latest formula result or alphanumeric characters and symbols (see page 129) to be displayed. This command is used to mark positions in formulas where results are to be displayed. Since programs are ended and their final results displayed automatically, this command can be omitted at the end of a program. However, if the Base-n mode is specified for base conversion during a program, do not omit the final "◢".
Here these two commands will be used in the previously presented procedure:

? → ALPHA A : 2 ⊠ √ 3 ⊠ ALPHA A $x^2$ SHIFT ◢
(Input to memory A; Display S)

√ 2 ÷ 3 ⊠ ALPHA A $x^y$ 3 ◢
(◢ omitted)

Now the program is complete.

## ③ Program storage

The storage of programs is performed in the WRT mode which is specified by pressing MODE 2 .

**Operation**

MODE 2

**Display**

```
sys mode  : WRT
cal mode  : COMP
  angle   : Deg
display   : Norm

4006 Bytes Free

Prog 0123456789
```

When [MODE] [2] are pressed, the system mode changes to the WRT mode. Then, the number of remaining steps (see page 106) is indicated. The number of remaining steps is decreased when programs are input or when memories are expanded. If no programs have been input and the number of memories equals 26 (the number of memories at initialization), the number of usable steps should equal 4,006.
The larger figures located below indicate the program areas (see page 108). If the letter "P" is followed by the numbers 0 through 9, it indicates that there are no programs stored in areas P0 through P9. The blinking zero here indicates the current program area is P0.
Areas into which programs have already been stored are indicated by "_" instead of numbers.

```
sys mode : WRT
cal mode : COMP
   angle : Deg
 display : Norm

3832 Bytes Free

Prog 01_34_6789
```

Here the previously mentioned program will be stored to program area P0 (indicated by the blinking zero):

| Operation | Display |
|---|---|
| [EXE] (Start storage) | _ |
| [?] [→] [ALPHA] [A] [:] 2 [×] [√] 3 [×] [ALPHA] [A] [$x^2$] [SHIFT] [◢] | ?→A : 2×√3×A²◢ _ |
| [√] 2 [÷] 3 [×] [ALPHA] [A] [$x^y$] 3 | ?→A : 2×√3×A²◢ √2÷3×A $x^y$ 3_ |

After these operations are complete, the program is stored.
** The system display appears only while the [M Disp] key is pressed.*

[M Disp] (Displayed while pressed)

```
**** MODE ****

sys mode : WRT
cal mode : COMP
   angle : Deg
 display : Norm

   Step P0-20
```

** After the program is stored, press [MODE] [1] to return to the RUN mode.*



## ④ Program execution

Programs are executed in the RUN mode ([MODE] [1]). The program area to be executed is specified using the [Prog] key.

To execute P0: [Prog] 0 [EXE]
To execute P3: [Prog] 3 [EXE]
To execute P8: [Prog] 8 [EXE]

Here the sample program that has been stored will be executed. The surface (S) and volume (V) for the regular octahedron in the sample problem are computed as:

| Length of one side (A) | Suface area (S) | Volume (V) |
|---|---|---|
| 10cm | (346.4101615)cm² | (471.4045208)cm³ |
| 7 | (169.7409791) | (161.6917506) |
| 15 | (779.4228634) | (1590.990258) |

| Operation | Display |
|---|---|
| [MODE] 1 | **** MODE **** sys mode : RUN cal mode : COMP angle : Deg display : Norm Step 0 |
| [Prog] 0 [EXE] | ?→A : 2×√3×A²◢ √2÷3×A $x^y$ 3 Prog 0 ? |
| 10 [EXE] (Value of A) | ?→A : 2×√3×A²◢ √2÷3×A $x^y$ 3 Prog 0 ? 10 346.4101615 — Disp — (S when A = 10) (Indicates answer displayed by ◢.) |

[EXE]

```
?→A:2×√3×A²
√2÷3×A x^y 3
Prog 0
?
10
        346.4101615
        471.4045208
```

(V when A = 10)

[Prog] 0 [EXE]

```
√2÷3×A x^y 3
Prog 0
?
10
        346.4101615
        471.4045208
Prog 0
?
```

7 [EXE] (Value of A)

```
10
        346.4101615
        471.4045208
Prog 0
?
7
        169.7409791
            - Disp -
```

(S when A = 7)

[EXE]

```
10
        346.4101615
        471.4045208
Prog 0
?
7
        169.7409791
        161.6917506
```

(V when A = 7)



[Prog] 0 [EXE]

```
        471.4045208
Prog 0
?
7
        169.7409791
        161.6917506
Prog 0
?
```

15 [EXE]
(Value of A)

```
7
        169.7409791
        161.6917506
Prog 0
?
15
        779.4228634
            - Disp -
```

(S when A = 15)

[EXE]

```
7
        169.7409791
        161.6917506
Prog 0
?
15
        779.4228634
        1590.990258
```

(V when A = 15)

** Program computations are performed automatically with each press of [EXE] when it is pressed after data is input or after the result is read.*

* *Directly after a program in P0 is executed by pressing* [Prog] 0 [EXE] *as in this example, the Prog 0 command is stored by the replay function. Therefore, subsequent executions of the same program can be performed by simply pressing* [EXE].

**Operation**

[Prog] 0 [EXE] (P0 program execution)
10 [EXE] (Input 10 for A)
[EXE] (Display V when A = 10)
[EXE] (Reexecute)
7 [EXE] (Input 7 for A)
[EXE] (Display V when A = 7)
⋮



# 4-2 PROGRAM CHECKING AND EDITING (CORRECTION, ADDITION, DELETION)

Recalling a stored program can be performed in order to verify its contents. After specifying the desired program area using [◁] or [▷] in the WRT mode ([MODE] [2]), the program contents will be displayed by pressing the [EXE] key. Once the program is displayed, the [▷] (or [◁], [△], [▽]) key is used to advance the program one step at a time for verification. When the program has been improperly stored, editing can also be performed by adding to it or erasing portions. Here a new program will be created by checking and editing the previous sample program (the surface area and volume of a regular octahedron).

**EXAMPLE:**
**Find the surface area and volume of a regular tetrahedron when the length of one side is given.**




| Length of one side (A) | Surface area (S) | Volume (V) |
|---|---|---|
| 10 cm | ( )cm$^2$ | ( )cm$^3$ |
| 7.5 | ( ) | ( ) |
| 20 | ( ) | ( ) |

## ① Formulas

For a surface area S, volume V and one side A, S and V for a regular tetrahedron are defined as:

$$S = \sqrt{3}\,A^2 \qquad V = \frac{\sqrt{2}}{12}\,A^3$$

## ② Programming

As with the previous example, the length of one side is stored in memory A and the program then constructed.

Numeric value A → [ALPHA] [A] [EXE]
[√] 3 [×] [ALPHA] [A] [$x^2$] [EXE] ..... S
[√] 2 [÷] 12 [×] [ALPHA] [A] [$x^y$] 3 [EXE] ..... V

When the above is formed into a program, it appears as follows:

[?] [→] [ALPHA] [A] [:] [√] 3 [×] [ALPHA] [A] [$x^2$] [SHIFT] [◢]
[√] 2 [÷] 12 [×] [ALPHA] [A] [$x^y$] 3

## ③ Program editing

First, a comparison of the two programs would be helpful.

Octahedron: [?] [→] [ALPHA] [A] [:] 2 [×] [√‾] 3 [×] [ALPHA] [A] [$x^2$] [SHIFT] [◢]
[√‾] 2 [÷] 3 [×] [ALPHA] [A] [$x^y$] 3

Tetrahedron: [?] [→] [ALPHA] [A] [:] [√‾] 3 [×] [ALPHA] [A] [$x^2$] [SHIFT] [◢]
[√‾] 2 [÷] 12 [×] [ALPHA] [A] [$x^y$] 3

The octahedron program can be changed to a tetrahedron program by deleting the parts marked with wavy lines, and changing those that are marked with straight lines.
In actual practice, this would be performed as follows:

| Operation | Display | |
|---|---|---|
| [MODE] [2] | sys mode : WRT<br>cal mode : COMP<br>angle : Deg<br>display : Norm<br>3986 Bytes Free<br>Prog _123456789 | |
| [EXE] | ?→A : 2×√‾3×A²◢<br>√‾2÷3×A $x^y$ 3 | Cursor located at beginning. Press [SHIFT] [EXE] to bring cursor to end. |
| [▷] [▷] [▷] [▷]<br>[DEL] [DEL] | ?→A : √‾3×A²◢<br>√‾2÷3×A $x^y$ 3 | Locate cursor at position to be deleted, and delete two characters. |
| [▽] [◁]<br>[INS] 12 | ?→A : √‾3×A²◢<br>√‾2÷123×A $x^y$ 3 | Insert two characters. |
| [DEL] | ?→A : √‾3×A²◢<br>√‾2÷12×A $x^y$ 3 | Delete unnecessary 3. |
| [MODE] [1] | **** MODE ****<br>sys mode : RUN<br>cal mode : COMP<br>angle : Deg<br>display : Norm<br>Step 0 | Editing cmoplete. Return to the RUN mode. |



## ④ Program execution

Now this program will be executed.

| Length of one side (A) | Surface area (S) | Volume (V) |
|---|---|---|
| 10 cm | (173.2050808)cm² | (117.8511302)cm³ |
| 7.5 | (97.42785793) | (49.71844555) |
| 20 | (692.820323) | (942.8090416) |

| Operation | Display |
|---|---|
| [MODE] [1] | **** MODE ****<br>sys mode : RUN<br>cal mode : COMP<br>angle : Deg<br>display : Norm<br>Step 0 |
| [Prog] 0 [EXE] | ?→A : √‾3×A²◢<br>√‾2÷12×A $x^y$ 3<br>Prog 0<br>? |
| 10 [EXE] | ?→A : √‾3×A²◢<br>√‾2÷12×A $x^y$ 3<br>Prog 0<br>?<br>10<br>173.2050808<br>– Disp – |
| [EXE] | ?→A : √‾3×A²◢<br>√‾2÷12×A $x^y$ 3<br>Prog 0<br>?<br>10<br>173.2050808<br>117.8511302 |

Prog 0 EXE

```
√2÷12×A x^y 3
Prog 0
?
10
        173.2050808
        117.8511302
Prog 0
?
```

7.5 EXE

```
10
        173.2050808
        117.8511302
Prog 0
?
7.5
         97.42785793
            - Disp -
```

EXE

```
10
        173.2050808
        117.8511302
Prog 0
?
7.5
         97.42785793
         49.71844555
```

Prog 0 EXE

```
        117.8511302
Prog 0
?
7.5
         97.42785793
         49.71844555
Prog 0
?
```



20 EXE

```
7.5
         97.42785793
         49.71844555
Prog 0
?
20
          692.820323
            - Disp -
```

EXE

```
7.5
         97.42785793
         49.71844555
Prog 0
?
20
          692.820323
         942.8090416
```

〈Summary〉

| | Operation | Keys used |
|---|---|---|
| Program check | ● WRT mode specification<br>● Program area specification (Omitted if P0)<br>● Start verification<br>● Verification of contents | MODE 2<br>◁ ▷<br>EXE<br>◁ ▷ △ ▽ |
| Correction | ● Move the cursor to the position to be corrected.<br>● Press correct keys. | ◁ ▷ △ ▽ |
| Deletion | ● Move the cursor to the position to be deleted.<br>● Delete | ◁ ▷ △ ▽<br>DEL |
| Insertion | ● Move the cursor to the position to be inserted into.<br>● Specify the insert mode.<br>● Press desired keys. | ◁ ▷ △ ▽<br>INS |

〈Reference〉

**Cursor movement**

Pressing the cursor keys ( ◁, ▷, △, ▽ ) causes the cursor to move as follows:




| Cursor position | ◁ | ▷ | △ | ▽ |
|---|---|---|---|---|
| Ⓐ | Invalid | 1 position right | Invalid | 1 line down (Ⓑ) |
| Ⓑ | 1 position left (Ⓒ) | 1 position right | 1 line up (Ⓐ) | End of line (Ⓓ) |
| Ⓒ | 1 position left | 1 position right (Ⓑ) | Beginning of line (Ⓐ) | 1 line down (Ⓓ) |
| Ⓓ | 1 position left | Invalid | 1 line up (Ⓒ) | Invalid |



# 4-3 PROGRAM DEBUGGING (CORRECTING ERRORS)

After a program has been created and input, it will sometimes generate error message when it is executed, or it will produce unexpected results. This indicates that there is an error somewhere within the program that needs to be corrected. Such programming errors are referred to as "bugs", while correcting them is called "debugging".

## ■ Debugging when an error message is generated

An error message is displayed as follows:

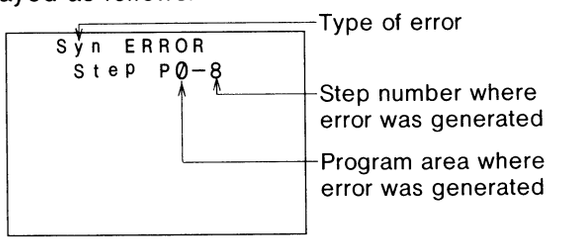


The error message informs the operator of the program area (P0 to P9) in which the error was generated. It also states the type of error, which gives an idea of the proper countermeasure to be taken. The step number indicates in which step of the program area the error was generated.

## ■ Error messages

There are a total of seven error messages.

① **Syn ERROR** (Syntax error)
Indicates a mistake in the formula or a misuse of program commands.

② **Ma ERROR** (Mathematical error)
Indicates the computation result of a numeric expression exceeds $10^{100}$, an illogical operation (i.e. division by zero), or the input of an argument that exceeds the input range of the function.

③ **Go ERROR** (Jump error)
Indicates a missing Lbl for the Goto command (see page 113), or that the program area (see page 108) for the Prog command (see page 120) does not contain a program.

④ **Ne ERROR** (Nesting error)
Indicates a subroutine nesting overflow by the Prog command.

⑤ **Stk ERROR** (Stack error)
Indicates the computation performed exceeds the capacity of the stack for numeric values or for commands (see page 16).

⑥ **Mem ERROR** (Memory error)
Indicates the attempt to use a memory name such as Z [5] without having expanded memories.

⑦ **Arg ERROR** (Argument error)
Indicates the argument of a command or specification in a program exceeds the input range (i.e. Sci 10, Goto 11).

Further operation will become impossible when an error message is displayed. Press [AC], [◁], or [▷] to cancel the error.
Pressing [AC] cancels the error and new key input becomes possible. With this operation, the RUN mode is maintained.
Pressing [◁] or [▷] cancels the error and changes the system mode to the WRT mode. The cursor is positioned at the location where the error was generated to allow modification of the program to eliminate the error.

## ■ Checkpoints for each type of error

The following are checkpoints for each type of error:

① **Syn ERROR**
Verify again that there are no errors in the program.

② **Ma ERROR**
For computations that require use of the memories, check to see that the numeric values in the memories do not exceed the range of the arguments. This type of error often occurs with division by 0 or the computation of negative square roots.

③ **Go ERROR**
Check to see that there is a corresponding Lbl $n$ when Goto $n$ is used. Also check to see that the program in P $n$ has been correctly input when Prog $n$ is used.

④ **Ne ERROR**
Check to ensure that the Prog command is not used in the branched program area to return execution to the original program area.



⑤ **Stk ERROR**
Check to see that the formula is not too long thus causing a stack overflow. If this is the case, the formula should be divided into two or more parts.

⑥ **Mem ERROR**
Check to see that memories were properly expanded using " [MODE] [·] $n$ [EXE] " (Defm). When using array-type memories (see page 124), check to see that the subscripts are correct.

⑦ **Arg ERROR**
Check whether values specified by [MODE] [7] (Sci) or [MODE] [8] (Fix) are within the range of 0 ~ 9. Also check whether values specified by Goto, Lbl, or Prog commands are within 0—9. Also ensure that memory expansion using [MODE] [·] (Defm) is performed within the remaining number of steps and that the value used for expansion is not negative.

# 4-4 COUNTING THE NUMBER OF STEPS

The program capacity of this unit consists of a total of 4,006 steps.
The number of steps indicates the amount of storage space available for programs, and it will decrease as programs are input. The number of remaining steps will also be decreased when steps are converted to memories. (See page 24).
There are two methods to determine the current number of remaining steps:

① When [MODE] [·] [EXE] are pressed in the RUN mode, the number of remaining steps will be displayed together with the number of memories.

**Example:**

[MODE] [·] [EXE]

```
**Defm**

 Program  :  19
  Memory  :  26

 3987 Bytes Free
```

Number of steps used for programming
Number of memories
Number of remaining steps

② Specify the WRT mode ([MODE] [2]), and the number of remaining steps will appear. At this time the status of the program areas can also be determined.

[MODE] [2]

```
sys mode  :  WRT
cal mode  :  COMP
   angle  :  Deg
 display  :  Norm

 3987 Bytes Free
Prog _123456789
```

Number of remaining steps

Basically, one function requires a single step, but there are some commands where one function requires two steps.

- One function/one step: sin, cos, tan, log, ( , ), :, A, B, 1, 2, 3, etc.
- One function/two steps: Lbl 1, Goto 2, Prog 8, etc.

Each step can be verified by the movement of the cursor:



**Example:**

Present cursor position→

```
?→A:√3×A²
√2÷12×A x^y 3
```

At this time, each press of a cursor key ([◁] or [▷]) will cause the cursor to move to the next sequential step. For example:

6th step

```
?→A:√3×A²
√2÷12×A x^y 3
```

The display will show at what step of the program the cursor is currently located as long as [M Disp] is pressed.

[M Disp] ~
(Hold down)

```
**** MODE ****

sys mode  :  WRT
cal mode  :  COMP
   angle  :  Deg
 display  :  Norm
   Step P0-6
```

Indicates cursor is located at 6th step.

# 4-5 PROGRAM AREAS AND COMPUTATION MODES

This unit contains a total of 10 program areas (P0 through P9) for the storage of programs. These program areas are all utilized in the same manner, and 10 independent programs can be input. One main program (main routine) and a number of secondary programs (subroutines) can also be stored. The total number of steps available for storage in program areas P0 through P9 is 4,006 maximum.
Specification of a program area is performed as follows:

**RUN mode:** Press any key from 0 through 9 after pressing the [Prog] key. Then press [EXE].

**Example:** P0 [Prog] [0] [EXE]
P8 [Prog] [8] [EXE]

** In this mode, program execution begins when [EXE] is pressed.*

**WRT mode:** Use [◁] or [▷] to move the cursor under the program area to be specified and press [EXE].

Only the numbers of the program areas that do not yet contain programs will be displayed. "_" symbols indicate program areas which already contain programs.

**Example:**

```
sys mode : WRT
cal mode : COMP
   angle : Deg
 display : Norm

 3987 Bytes Free

Prog _123__67_9
```

Programs already stored in these program areas.

## ■ Program area and computation mode specification in the WRT mode

Besides normal function computations, to perform binary, octal, decimal and hexadecimal computations and conversions, standard deviation computations, and regression computations in a program, a computation mode must be specified. Program mode specification and program area specification are performed at the same time.



First the WRT mode is specified ([MODE] [2]), and then a computation mode is specified. Next, the program area is specified, and, when [EXE] is pressed, the computation mode is memorized in the program area.
Henceforth, stored programs will be accompanied with the computation mode.

**Example: Memorizing the Base-n mode in P2.**

[MODE] [2]

```
sys mode : WRT
cal mode : COMP
   angle : Deg
 display : Norm

 4006 Bytes Free

Prog 0123456789
```

Assuming that nothing is stored.

[▷] [▷]

```
sys mode : WRT
cal mode : COMP
   angle : Deg
 display : Norm

 4006 Bytes Free

Prog 0123456789
```

Specify P2.

[MODE] [—]

```
sys mode : WRT
cal mode :Base-n
             Dec

 4006 Bytes Free

Prog 0123456789
```

Specify the Base-n mode.

[EXE]

```
_
```

As shown above, the computation mode will be memorized into a program area.

## ■ Cautions concerning the computation modes

All key operations available in each computation mode can be stored as programs, but, depending on the computation mode, certain commands or functions cannot be used.

**Base-n mode**

- Function computations cannot be performed.
- Units of angular measurement cannot be specified.
- All program commands can be used.
- Be sure to include a "◢" at the final result output to return to the previous computation mode when a program execution is terminated. Failure to do so may result in a decimal display or an error.

**SD1, SD2 mode**

- Among the functions, Abs and $\sqrt[3]{\ }$ cannot be used.
- Among the program commands, Dsz, > and < cannot be used.

**LR1, LR2 mode**

- Among the functions, Abs and $\sqrt[3]{\ }$ cannot be used.
- Among the program commands, ⇒, =, ≠, Isz, ≥, ≤, Dsz, > and < cannot be used.



# 4-6 ERASING PROGRAMS

Erasing of programs is performed in the PCL mode. Press [MODE] [3] to specify the PCL mode. There are two methods used to erase programs: erasing a program located in a single program area, and erasing all programs.

## ■ Erasing a single program

To erase a program in a single program area, specify the PCL mode and press the [AC] key after specifying the program area.

**Example: Erase the program in P3 only.**

| Operation | Display | |
|---|---|---|
| [MODE] [3] | sys mode : PCL<br>cal mode : COMP<br>angle : Deg<br>display : Norm<br><br>3908 Bytes Free<br><br>Prog _12_45678_ | P0, P3 and P9 already contain programs. |
| [▷] [▷] [▷] | sys mode : PCL<br>cal mode : COMP<br>angle : Deg<br>display : Norm<br><br>3908 Bytes Free<br><br>Prog _12_45678_ | Align cursor with P3. |
| [AC] | sys mode : PCL<br>cal mode : COMP<br>angle : Deg<br>display : Norm<br><br>3951 Bytes Free<br><br>Prog _12345678_ | Number 3 appears after deletion. |

[MODE] [1]

```
**** MODE ****

sys mode : RUN
cal mode : COMP
   angle : Deg
 display : Norm

   Step     0
```

Return to RUN mode.

## ■ Erasing all programs

To erase all programs stored in program areas 0 through 9, specify the PCL mode and press [SHIFT] and then [DEL].

**Example: Erase the programs stored in P0, P4, P8 and P9.**

| Operation | Display |
|---|---|
| [MODE] [3] | sys mode : PCL<br>cal mode : COMP<br>angle : Deg<br>display : Norm<br><br>3879 Bytes Free<br><br>Prog _123_567__ |
| [SHIFT] [DEL] | sys mode : PCL<br>cal mode : COMP<br>angle : Deg<br>display : Norm<br><br>4006 Bytes Free<br><br>Prog 0123456789 |
| [MODE] [0] | **** MODE ****<br><br>sys mode : RUN<br>cal mode : COMP<br>angle : Deg<br>display : Norm<br><br>Step 0 |



# 4-7 CONVENIENT PROGRAM COMMANDS

The programs for this unit are made based upon manual computations. Special program commands, however, are available to allow the selection of the formula, and repetitive execution of the same formula.
Here, some of these commands willl be used to produce more convenient programs.

## ■ Jump commands

Jump commands are used to change the flow of program execution.
Programs are executed in the order that they are input (from the lowest step number first) until the end of the program is reached. This system is not very convenient when there are repeat computations to be performed or when it is desirable to transfer execution to another formula. It is in these cases, however, that the jumps commands are very effective. There are three types of jump commands: a simple unconditional jump to a branch destination, conditional jumps that decide the branch destination by whether a certain condition is true or not, and count jumps that increase or decrease a specific memory by one and then decide the branch destination after checking whether the value stored equals zero or not.

### ◆ Unconditional jump

The unconditional jump is composed of "Goto" and "Lbl". When program execution reaches the statement "Goto $n$" (where $n$ is a number from 0 through 9), execution then jumps to "Lbl $n$" ($n$ is the same value as Goto $n$). The unconditional jump is often used in simple programs to return execution to the beginning for repetitive computations, or to repeat computations from a point within a program.
Unconditional jumps are also used in combination with conditional and count jumps.

**Example: The previously presented program to find the surface area and volume of a regular tetrahedron will be rewritten using "Goto 1" and "Lbl 1" to allow repeat computations.**

The previous program contained:

?, →, A, :, $\sqrt{\ }$, 3, ×, A, $x^2$, ◢,
$\sqrt{\ }$, 2, ÷, 1, 2, ×, A, $x^y$, 3 — 19 steps

* *Hereinafter, commas ( , ) will be used to separate steps for the sake of clarity.*

Add "Goto 1" to the end of the program, and add "Lbl 1" to the beginning of the program as the branch destination.
If this is simply left the way it is, however, the volume will not be displayed and execution will move immediately to the input of one side at the beginning. To prevent this situation, insert a display command (◢) in front of the "Goto 1".

The complete program with the unconditional jump added should look like this:

Lbl, 1, :, ?, →, A, :, √, 3, ×, A, $x^2$, ◢,
√, 2, ÷, 1, 2, ×, A, $x^y$, 3, ◢, Goto, 1 25 steps

Now let's try executing this program.

** For details on inputting programs and editing programs, see sections 4-1 and 4-2.*

**Henceforth, the displays will only show computation result output.*

| Operation | Display | |
|---|---|---|
| Prog 0 EXE | ? | Stored in P0. |
| 10 EXE | 173.2050808 | The length of the side=10 |
| EXE | 117.8511302 | |
| EXE | ? | |
| 7.5 EXE | 97.42785793 | The length of the side=7.5 |
| EXE | 49.71844555 | |
| EXE | ? | |

Since the program is in an endless loop, it will continue execution. To terminate execution, press MODE 1.

MODE 1

```
**** MODE ****

sys mode : RUN
cal mode : COMP
   angle : Deg
 display : Norm

   Step    0
```



Besides the beginning of the program, branch destinations can be designated at any point within the program.

**Example: Compute $y=ax+b$ when the value for $x$ changes each time, while a and b can also change depending upon the computation.**

**Program**

?, →, A, :, ?, →, B, :, Lbl, 1, :, ?, →, X, :,
A, ×, X, +, B, ◢, Goto, 1 23 steps

When this program is executed, the values for a and b are stored in memories A and B respectively. After that, only the value for $x$ can be changed.
In this way an unconditional jump is made in accordance with "Goto" and "Lbl", and the flow of program execution is changed. When there is no "Lbl $n$" to correspond to a "Goto $n$", an error (Go ERROR) is generated.

## ◆ Conditional jumps

The conditional jumps compare a numeric value in memory with a constant or a numeric value in another memory. If the condition is true, the statement following the "⇒" is executed, and if the condition is not true, execution skips the statement and continues following the next "↵", ":" or "◢".
Conditional jumps take on the following form:

**Left side** **Relational operator** **Right side** ⇒ **State-ment** {↵ : ◢}* **State-ment**

** ↵ represents carriage return function (see page 122).*
** Anyone can be used.*

One memory name (alphabetic character from A through Z), constant numeric values or computation formulas (A×2, D−E, etc.) are used for "left side" and "right side".
The relational operator is a comparison symbol. There are 6 types of relational operators: =, ≠, ≥, ≤, >, <.

Left side = right side (left side equals right side)
Left side ≠ right side (left side does not equal right side)
Left side ≥ right side (left side is greater than or equal to right side)
Left side ≤ right side (left side is less than or equal to right side)
Left side > right side (left side is greater than right side)
Left side < right side (left side is less than right side)

The "⇒" is displayed when SHIFT 7 are pressed. If the condition is true, execution advances to the statement following ⇒. If the condition is not true, the statement following ⇒ is skipped and execution jumps to the statement following the next "↵", " : " or "◢".




A statement is a computation formula (sin A×5, etc.) or a program command (Goto, Prog, etc.), and everything up to the next "↵", " : " or "◢" is regarded as one statement.

**Example: If an input numeric value is greater than or equal to zero, compute the square root of that value. If the input value is less than zero, reinput another value.**

**Program**

Lbl, 1, :, ?, →, A, :, A, ≥, 0, ⇒, √, A, ◢, Goto, 1

16 steps

In this program, the input numeric value is stored in memory A, and then it is tested to determine whether it is greater than, equal to or less than zero. If the contents of memory A are greater than or equal to 0 (not less than zero), the statement (computation formula) located between "⇒" and "◢" will be executed, and then Goto 1 returns execution to Lbl 1. If the contents of memory A are less than zero, execution will skip the following statement to the next "◢" and returned to Lbl 1 by Goto 1.

**Example: Compute the sum of input numeric values. If a 0 is input, the total should be displayed.**

**Program**

0, →, B, :,
Lbl, 1, :, ?, →, A, :, A, =, 0, ⇒, Goto, 2, :,
A, +, B, →, B, :, Goto, 1, :,
Lbl, 2, :, B

31 steps

In this program, a 0 is first stored in memory B to clear it for computation of the sum. Next, the value input by "?→A" is stored in memory A by "A=0⇒" and it is determined whether or not the value stored in memory A equals zero. If A=0, Goto 2 causes execution to jump to Lbl 2. If memory A does not equal 0, Goto 2 will be skipped and the command A+B→B which follows ":" is executed, and then Goto 1 returns execution to Lbl 1.

Execution from Lbl 2 will display the sum that has been stored in memory B. Actually, the display command "◢" is inserted following B, but here it can be omitted.



The following illustration shows the flow of the program:

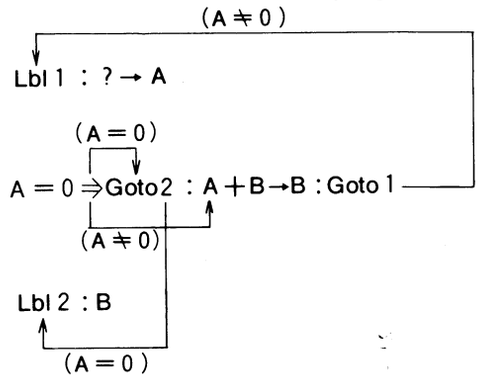


## ◆ Count jumps

The count jumps cause the value in a specified memory to be increased or decreased by 1. If the value does equal 0, the following statement is skipped, and the statement following the next "↵", " : " or "◢" is executed. The "Isz" command is used to increase the value in memory by 1 and decide the subsequent execution, while the "Dsz" command is used to decrease the value by 1 and decide.







**Example:** Increase memory A by one ····· Isz A
Decrease memory B by one ····· Dsz B

**Example: Determine the average of 10 input numeric values.**

**Program**

1, 0, →, A, :, 0, →, C, :,
Lbl, 1, :, ?, →, B, :, B, +, C, →, C, :,
Dsz, A, :, Goto, 1, :, C, ÷, 1, 0

32 steps

In this program, first 10 is stored in memory A, and 0 is stored in memory C. Memory A is used as the "counter" and countdown is performed the specified number of times by the Dsz command. Memory C is used to store the sum of the inputs, and so first must be cleared by inputting a 0. The numeric value input in response to "?" is stored in memory B, and then the sum of the input values is stored in memory C by "B+C→C ".
The statement Dsz A then decreases the value stored in memory A by 1. If the result does not equal 0, the following statement, Goto 1 is executed. If the result equals 0, the following Goto 1 is skipped and "C÷10" is executed.

**Example: Determine the altitude at one-second intervals of a ball thrown into the air at an initial velocity of Vm/sec and an angle of S°. The formula is expressed as: $h = V\sin\theta\, t - \frac{1}{2}gt^2$, with g = 9.8, with the effects of air resistance being disregarded.**

**Program**

Deg, : , 0, →, T, : , ? , →, V, : , ? , →, S, : ,
Lbl, 1 , : , Isz, T, : , V, ×, sin, S, ×, T, −,
9 , • , 8 , ×, T, $x^2$, ÷, 2 , ◢, Goto, 1 38 steps

In this program the unit of angular measurement is set and memory T is first initialized (cleared). Then the initial velocity and angle are input into memories V and S respectively.
Lbl 1 is used at the beginning of the repeat computations. The numeric value stored in memory T is counted up (increased by 1) by Isz T. In this case, the Isz command is used only for the purpose of increasing the value stored in memory T, and the subsequent jump does not depend upon any comparison or decision. The Isz command can also be used in the same manner as seen with the Dsz command for jumps that require decisions, but, as can be seen here, it can also be used to simply increase values. If, in place of the Isz command, another method such as "T+1→T" is used, five steps are required instead of the two for the (Isz T) method shown here. Such commands are convenient ways of conserving memory space.
Each time memory T is increased, computation is performed according to the formula, and the altitude is displayed. It should be noted that this program is endless, so when the required value is obtained, MODE 1 are pressed to terminate the program.



〈Summary〉

| Command | Formula | Operation |
|---|---|---|
| Unconditional jump | Lbl $n$<br>Goto $n$ ($n$=natural number from 0 through 9) | Performs unconditional jump to Lbl $n$ corresponding to Goto $n$. |
| Conditional jumps | Left side Relational operator Right side ⇒<br>Statement {↵ : ◢} Statement<br>(Relational operators: =, ≠, >, <, ≥, ≤) | Left and right sides are compared. If the conditional expression is true, the statement after ⇒ is executed.<br>If not true, execution jumps to the statement following the next ↵, : or ◢.<br>Statements include numeric expressions, Goto commands, etc. |
| Count jumps | Isz Memory name:<br>Statement {↵ : ◢} Statement<br>Dsz Memory name:<br>Statement {↵ : ◢} Statement<br>(Memory name consists of single character from A through Z, A[ ], etc.) | Numeric value stored in memory is increased (Isz) or decreased (Dsz) by one. If result equals 0, a jump is performed to the statement following the next ↵, : or ◢.<br>Statements include numeric expressions, Goto commands, etc. |

## ■ Subroutines

A program contained in a single program area is called a "main routine". Often used program segments stored in other program areas are called "subroutines".
Subroutines can be used in a variety of ways to help make computations easier. They can be used to store formulas for repeat computations as one block to be jumped to each time, or to store often used formulas or operations for call up as required.

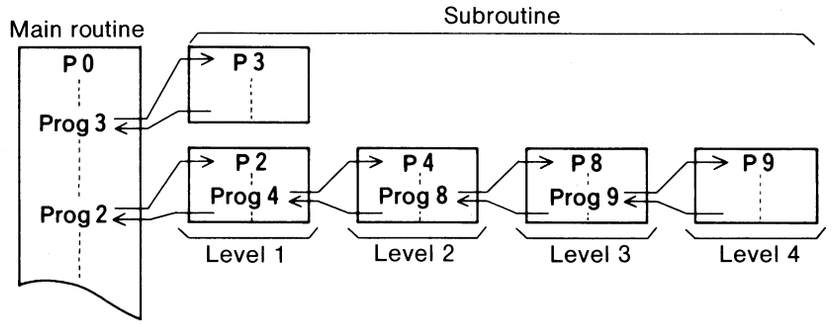


The subroutine command is "Prog" followed by a number from 0 through 9 which indicates the program area.

**Example:** Prog 0 ·····Jump to program area 0
Prog 2 ·····Jump to program area 2

After the jump is performed using the Prog command, execution continues from the beginning of the program stored in the specified program area. After execution reaches the end of the subroutine, the program returns to the statement following the Prog *n* command in the original program area. Jumps can be performed from one subroutine to another, and this procedure is known as "nesting". Nesting can be performed to a maximum of 10 levels, and attempts to exceed this limit will cause an error (Ne ERROR) to be generated. Attempting to use Prog to jump to a program area in which there is no program stored will also result in an error (Go ERROR).

* *A Goto n contained in a subroutine will jump to the corresponding Lbl n contained in that program area.*

**Example: Simultaneously execute the two previously presented programs to compute the surface areas and volumes of a regular octahedron and tetrahedron.**
**Express the result in three decimal places.**

This example employs two previously explained programs, and the first step is to input the specified number of decimal places (MODE 7 3).



Now let's review the two original programs.

**Regular octahedron**

P0 Fix, 3, :, ?, →, A, :, 2, ×, √, 3, ×, A, $x^2$, ◢, √, 2, ÷, 3, ×, A, $x^y$, 3 — 23 steps

**Regular tetrahedron**

P1 Fix, 3, :, ?, →, A, :, √, 3, ×, A, $x^2$, ◢, √, 2, ÷, 1, 2, ×, A, $x^y$, 3 — 22 steps

Total: 45 steps

If the two programs are compared, it is evident that the underlined portions are identical. If these portions are incorporated into a common subroutine, the programs are simplified and the number of steps required is decreased.

Furthermore, the portions indicated by the wavy line are not identical as they stand, but if P1 is modified to: √, 2, ÷, 3, ×, A, $x^y$, 3, ÷, 4, the two portions become identical.

Now the portions underlined by the straight line will be stored as an independent routine in P9 and those underlined with the wavy line will be stored in P8.

P9 Fix, 3, :, ?, →, A, :, √, 3, ×, A, $x^2$ — 12 steps

P8 √, 2, ÷, 3, ×, A, $x^y$, 3 — 8 steps

After the common segments have been removed, the remainder of the regular octahedron formula is stored in P0, and that of the regular tetrahedron is stored in P1. Of course, the "Prog 9" and "Prog 8" must be added to jump to subroutines P9 and P8.

P0 Prog, 9, :, Ans, ×, 2, ◢, Prog, 8 — 9 steps

P1 Prog, 9, ◢, Prog, 8, :, Ans, ÷, 4 — 9 steps

Total: 38 steps

With this configuration, execution jumps to program P9 at the beginning of programs P0 and P1, three decimal places are specified, the value for one side is entered, and the surface area of the tetrahedron is computed. The expression "2×" of the original octahedron formula was omitted in P9, so when execution returns to P0, "Ans×2" is used to obtain the surface of the octahedron. In the case of P1, the result of P9 needs no further modification and so is immediately displayed upon return to P1.

Computation of the volumes is also performed in a similar manner. After a jump is made to P8 for computation, execution returns to the main routines. In P0, the program ends after the volume of the octahedron is displayed. In P1, however, the result computed in P8 is divided by four to obtain the volume of the tetrahedron. By using subroutines in this manner, steps can be shortened and programs become neat and easy to read.
The following illustration shows the flow of the program just presented.

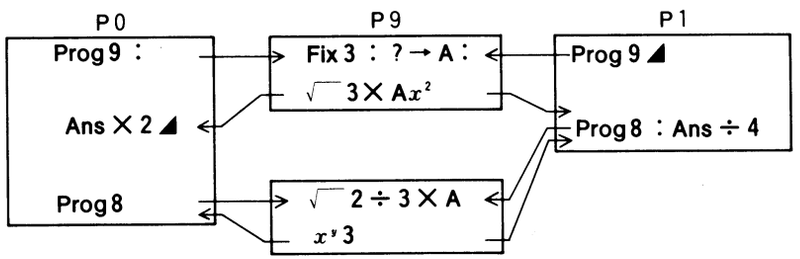


**By isolating the common portions of the two original programs and storing them in separate program areas, steps are shortened and programs take on a clear configuration.**

## ■ Carriage return function

With the carriage return function, [EXE] is used in place of [:] to separate commands to produce easy-to-read displays.

```
Deg : 0→T : ?→V : ?→S :
Lbl 1 : Isz T : VXsi
n SXT−9.8XT²÷2◢
Goto 1
```

Using the carriage return function in the program shown above produces the following display:

```
Deg
0→T : ?→V : ?→S
Lbl 1 : Isz T : VXsi
n SXT−9.8XT²÷2◢
Goto 1
```

[EXE] pressed at these two locations. Nothing is displayed at the point where [EXE] is pressed, and the display advances to the next line.

This makes angle unit setting and looped operations, etc. easier to follow.



• **Operation procedure**

[MODE] [4] [EXE] (Press in place of [:])
[0] [→] [ALPHA] [T] [:] [?] [→] [ALPHA] [V] [:] [?] [→] [ALPHA] [S] [EXE]
[SHIFT] [Lbl] [1] [:] ……

* To include the carriage return function in a program that has already been input, first press [INS] to specify the insert mode and then press [EXE]. Then, delete the " : ".

```
Deg : 0→T : ?→V : ?→S :
Lbl 1 : Isz T : VXsi
n SXT−9.8XT²÷2◢
Goto 1
```

Align the cursor with the " : " following "Deg" and press [INS] [EXE].

[▷] [INS] [EXE]

```
Deg
:0→T : ?→V : ?→S : Lbl
1 : Isz T : VXsin S
XT−9.8XT²÷2◢
Goto 1
```

Delete the " : ".

[DEL]

```
Deg
0→T : ?→V : ?→S : Lbl
1 : Isz T : VXsin SX
T−9.8XT²÷2◢
Goto 1
```

Align the cursor with the " : " following "?→S". As above, first insert [EXE] and then delete the " : ".

[▷] ~ [▷] [INS]
[EXE] [DEL]

```
Deg
0→T : ?→V : ?→S
Lbl 1 : Isz T : VXsi
n SXT−9.8XT²÷2◢
Goto 1
```

* Carriage return can be used in manual operations by pressing [SHIFT] [EXE].

# 4-8 ARRAY-TYPE MEMORIES

## ■ Using array-type memories

Up to this point all of the memories used have been referred to by single alphabetic characters such as A, B, X, or Y.
With the array-type memory introduced here, a memory name (one alphabetic character from A through Z) is appended with a subscript such as [1] or [2].
** Brackets are input by* [ALPHA] [·] *and* [ALPHA] [EXP].

| Standard memory | Array-type memory | |
|---|---|---|
| A | A[0] | C[−2] |
| B | A[1] | C[−1] |
| C | A[2] | C[0] |
| D | A[3] | C[1] |
| E | A[4] | C[2] |

Proper utilization of subscripts shortens programs and makes them easier to use. Negative values used as subscripts are counted in relation to memory zero as shown above.

**Example: Input the numbers 1 through 10 into memories A through J.**

**Using standard memories**

```
1 , →, A, :, 2 , →, B, :, 3 , →, C, :, 4 , →, D, :,
5 , →, E, :, 6 , →, F, :, 7 , →, G, :, 8 , →, H, :,
9 , →, I, :, 1 , 0, →, J                          40 steps
```

**Using array-type memories**

```
0, →, Z, :, Lbl, 1 , :, Z, +, 1 , →, A, [, Z, ], :,
Isz, Z, :, Z, <, 1 , 0, ⇒, Goto, 1                26 steps
```

In the case of using standard memories, inputting values into memories one by one is both inefficient and time consuming. What happens, if we want to see a value stored in a specific memory?



**Using standard memories**

```
Lbl, 1 , :, ?, →, Z, :,
Z, =, 1 , ⇒, A, ◢, Z, =, 2 , ⇒, B, ◢,
Z, =, 3 , ⇒, C, ◢, Z, =, 4 , ⇒, D, ◢,
Z, =, 5 , ⇒, E, ◢, Z, =, 6 , ⇒, F, ◢,
Z, =, 7 , ⇒, G, ◢, Z, =, 8 , ⇒, H, ◢,
Z, =, 9 , ⇒, I, ◢, Z, =, 1 , 0, ⇒, J, ◢,
Goto, 1                                           70 steps
```

**Using array-type memories**

```
Lbl, 1 , :, ?, →, Z, :, A, [, Z, −, 1 , ], ◢,
Goto, 1                                           16 steps
```

The difference is readily apparent. When using the standard memories, the input value is compared one by one with the value assigned to each memory (i.e. A=1, B=2, . . ).
With the array-type memories, the input value is immediately stored in the proper memory determined by "[Z−1]". Formulas (Z−1, A+10, etc.) can even be used for the subscript.

## ■ Cautions when using array-type memories

When using array-type memories, a subscript is appended to an alphabetic character that represents a standard memory from A through Z.
Therefore, care must be taken to prevent overlap of memories.
The relation is as follows:

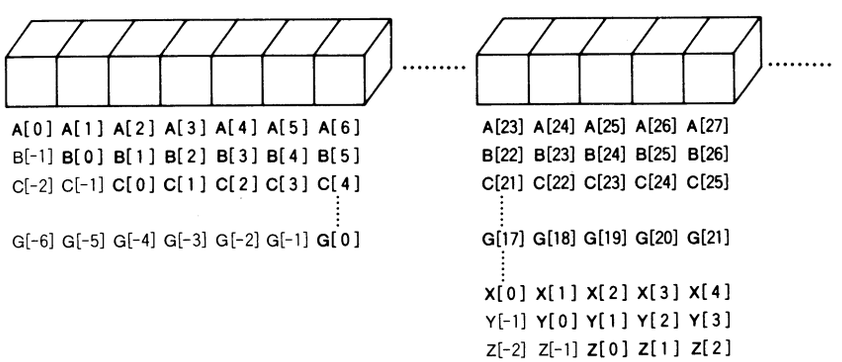

The following shows a case in which array-type memories overlap with standard format memories. This situation should always be avoided.

**Example: Store the numeric values from 1 through 5 in memories A[1] through A[5] respectively.**

```
5 , →, C, :, Lbl, 1 , :, C, →, A, [, C, ], :,
Dsz, C, :, Goto, 1 , :,
A, [, 1 , ], ◢, A, [, 2 , ], ◢, A, [, 3 , ], ◢,
A, [, 4 , ], ◢, A, [, 5 , ]                    44 steps
```

In this program, the values 1 through 5 are stored in the array-type memories A[1] through A[5], and memory C is used as a counter memory. When this program is executed, the following results are obtained:

| Operation | Display |
|---|---|
| Prog 0 EXE | 1. |
| EXE | 0. |
| EXE | 3. |
| EXE | 4. |
| EXE | 5. |

As can be seen, the second displayed value (which should be 2) in A[2] is incorrect. This problem has occurred because memory A[2] is the same as memory C.

| A | B | C | D | E | F |
|---|---|---|---|---|---|
| | A[1] | A[2] | A[3] | A[4] | A[5] |

The content of memory C (A[2]) is decreased from 5 to 0 in steps of 1. Therefore, the content of memory A[2] is displayed as 0.



## ■ Application of the array-type memories

It is sometimes required to treat two different types of data as a single group. In this case, memories for data processing and those for data storage should be kept separate.

**Example: Store data $x$ and $y$ in memories. When an $x$ value is input, the corresponding $y$ value is displayed. There will be a total of 15 pieces of data.**

### Example program 1

Memory A is used as the data control memory, and memory B is used for temporary storage of the $x$ data. The $x$ data are stored in memories C[1] (memory D) through C[15] (memory R), and the $y$ data are stored in memories C[16] (memory S) through C[30] (memory Z[7]).

```
1 , →, A, :, Defm, 7 , :,
Lbl, 1 , :, ?, →, C, [, A, ], :,
?, →, C, [, A, +, 1 , 5 , ], :,
Isz, A, :, A, =, 1 , 6 , ⇒, Goto, 2 , :, Goto, 1 , :,
Lbl, 2 , :, 1 , 5 , →, A, :, ?, →, B, :,
B, =, 0, ⇒, Goto, 5 , :,
Lbl, 3 , :, B, =, C, [, A, ], ⇒, Goto, 4 , :,
Dsz, A, :, Goto, 3 , :, Goto, 2 , :,
Lbl, 4 , :, C, [, A, +, 1 , 5 , ], ◢, Goto, 2 , :,
Lbl, 5                                          98 steps
```

In this program, memories are used as follows:

$x$ data

| C[1] | C[2] | C[3] | C[4] | C[5] | C[6] | C[7] | C[8] |
|---|---|---|---|---|---|---|---|
| D | E | F | G | H | I | J | K |

| C[9] | C[10] | C[11] | C[12] | C[13] | C[14] | C[15] |
|---|---|---|---|---|---|---|
| L | M | N | O | P | Q | R |

$y$ data

| C[16] | C[17] | C[18] | C[19] | C[20] | C[21] | C[22] | C[23] |
|---|---|---|---|---|---|---|---|
| S | T | U | V | W | X | Y | Z |

| C[24] | C[25] | C[26] | C[27] | C[28] | C[29] | C[30] |
|---|---|---|---|---|---|---|
| Z(1) | Z(2) | Z(3) | Z(4) | Z(5) | Z(6) | Z(7) |

**Example program 2**

The same memories are used as in Example 1, but two types of memory names are used and the $x$ and $y$ data kept separate.

```
1 , →, A, :, Defm, 7 , :,
Lbl, 1 , :, ?, →, C, [, A, ], :,
?, →, R, [, A, ], :,
Isz, A, :, A, =, 1 , 6 , ⇒, Goto, 2 , :, Goto, 1 , :,
Lbl, 2 , :, 1 , 5 , →, A, :, ?, →, B, :,
B, =, 0, ⇒, Goto, 5 , :,
Lbl, 3 , :, B, =, C, [, A, ], ⇒, Goto, 4 , :,
Dsz, A, :, Goto, 3 , :, Goto, 2 , :,
Lbl, 4 , :, R, [, A, ], ◢, Goto, 2 , :,
Lbl, 5                                          92 steps
```

Memories are used as follows:

**$x$ data**

| C [1] | C [2] | C [3] | C [4] | C [5] | C [6] | C [7] | C [8] |
|---|---|---|---|---|---|---|---|
| D | E | F | G | H | I | J | K |
| C [9] | C [10] | C [11] | C [12] | C [13] | C [14] | C [15] | |
| L | M | N | O | P | Q | R | |

**$y$ data**

| R [1] | R [2] | R [3] | R [4] | R [5] | R [6] | R [7] | R [8] |
|---|---|---|---|---|---|---|---|
| S | T | U | V | W | X | Y | Z |
| R [9] | R [10] | R [11] | R [12] | R [13] | R [14] | R [15] | |
| Z (1) | Z (2) | Z (3) | Z (4) | Z (5) | Z (6) | Z (7) | |

In this way, the memory names can be changed. However, since memory names are restricted to the letters from A through Z, the expanded memories ([MODE] [·]) can only be used as array-type memories.

* *The memory expansion command (Defm) can be used in a program.*

**Example: Expand the number of memories by 14 to make a total of 40 available.**

```
Defm, 1, 4, :, ·····
```



# 4-9 DISPLAYING ALPHA-NUMERIC CHARACTERS AND SYMBOLS

Alphabetic characters, numbers, computation command symbols, etc. can be displayed as messages. They are enclosed in quotation marks ([ALPHA] [:]).

## ■ Alpha-numeric characters and symbols

- **Characters and symbols displayed when pressed following [ALPHA] :**

  [, ], k, m, μ, n, p, f, space,
  A, B, C, D, E, F, G, H, I, J, K, L, M, N,
  O, P, Q, R, S, T, U, V, W, X, Y, Z

- **Other numbers, symbols, calculation commands, program commands**

  0, 1, 2, 3, 4, 5, 6, 7, 8, 9,
  (, ), $\sqrt{\ }$, E, +, −, ×, ÷, ...
  sin, cos, tan, log, ln, ...
  =, ≠, ≥, ≤, >, <, ...
  A, B, C, D, E, F, d, h, b, o
  Neg, Not, and, or, xor
  $\bar{x}$, $\bar{y}$, $x\sigma_n$, $x\sigma_{n-1}$, ...
  ° ([SHIFT] [MODE] [4]), ′ ([SHIFT] [MODE] [5]), ᵍ ([SHIFT] [MODE] [6])

* *All of the above noted characters can be used in the same manner as the alphabetic characters.*

In the preceding example requiring an input of two types of data ($x$, $y$), the prompt "?" does not give any information concerning the type of input expected. A message can be inserted before the "?" to verify the type of data required for input.

```
Lbl, 1 , :, ?, →, X, :, ?, →, Y, :, ...
```

The messages "X=" and "Y=" will be inserted into this program.

```
Lbl, 1 , :, ", X, =, ", ?, →, X, :,
", Y, =, ", ?, →, Y, :, ...
```

If messages are included as shown here, the display is as follows:
(Assuming that the program is stored in P1)

[Prog] 1 [EXE]
10 [EXE]

| X=? |
|---|
| Y=? |

⋮ ⋮

Messages are also convenient when displaying result in program computations.

**Example:**

Lbl, 0, :, ", N, =, ", ?, →, B, ~, C, :,
0, →, A, :,
Lbl, 1, :, C, ÷, 2, →, C, :, Frac, C, ≠, 0, ⇒, Goto, 3,
:, Isz, A, :, C, =, 1, ⇒, Goto, 2, :, Goto, 1, :,
Lbl, 2, :, ", X, =, ", ◢, A, ◢, Goto, 0, :,
Lbl, 3, :, ", N, O, ", ◢, Goto, 0 70 steps

This program computes the $x$ power of 2. A prompt of "N=?" appears for data input. The result is displayed by pressing [EXE] while "X=" is displayed. When an input data is not the $x$ power of 2, the display "NO" appears and execution returns to the beginning for reinput.

* ***Always follow a message with a ◢ whenever a formula follows the message.***

Assuming that the program is stored in P2:

[Prog] 2 [EXE]
4096 [EXE]
[EXE]
[EXE]
3124 [EXE]
[EXE]
512 [EXE]
[EXE]

| N=? |
|---|
| X= |
| 12. |
| N=? |
| NO |
| N=? |
| X= |
| 9. |



Strings longer than 16 characters are displayed in two lines. When alphabetic characters are displayed at the end of the bottom line, the entire display shifts upwards and the uppermost line disappears from the display.

[Prog] 0

```
123+45
              168.
852-87
              765.
968+125-65
             1028.
Prog 0
```

[EXE]

```
123+45
              168.
852-87
              765.
968+125-65
             1028.
Prog 0
ABCDEFGHIJKLMNOP
```

↓ After a while

```
              168.
852-87
              765.
968+125-65
             1028.
Prog 0
ABCDEFGHIJKLMNOP
QRSTUVWXYZ
```

# 4-10 USING THE GRAPH FUNCTION IN PROGRAMS

Using the graph function within programs makes it possible to graphically represent long, complex equations and to overwrite graphs repeatedly. All graph commands (except the trace function) can be included in programs. Range values can also be written into the program.
Generally, manual graph operations can be used in programs without modification.

**Ex. 1) Graphically determine the number of solutions (real roots) that satisfy both of the following two equations.**

$y=x^4-x^3-24x^2+4x+80$

$y=10x-30$

The range values are as follows:

```
Range
Xmin:-10.
 max:10.
 scl:2.
Ymin:-120.
 max:150.
 scl:50.
```

First, program the range settings. Note that values are separated from each other by commas ",".

Range, (−), 1, 0, , , 1, 0, , , 2, , , (−), 1, 2, 0, , , 1, 5, 0, , , 5, 0

Next, program the equation for the first graph.

Graph, X, $x^y$, 4, −, X, $x^y$, 3, −, 2, 4, X, $x^2$, +, 4, X, +, 8, 0

Finally, program the equation for the second graph.

Graph, 1, 0, X, −, 3, 0 Total 49 steps

When inputting this program, press [EXE] after input of the ranges and the first equation.

```
Range -10,10,2,-
120,150,50
Graph Y=X x^y 4-X x^y
3-24X^2+4X+80
Graph Y=10X-30_
```



The following should appear on the display when the program is executed:

[Prog] 0 [EXE]



A "◢" can be input in place of the [EXE] key operation after the first equation to suspend execution after the first graph is produced. To continue execution to the next graph, press [EXE].

The procedure outlined above can be used to produce a wide variety of graphs.
The library at the end of this manual includes a number of examples of graph programming.

# PROGRAM LIBRARY

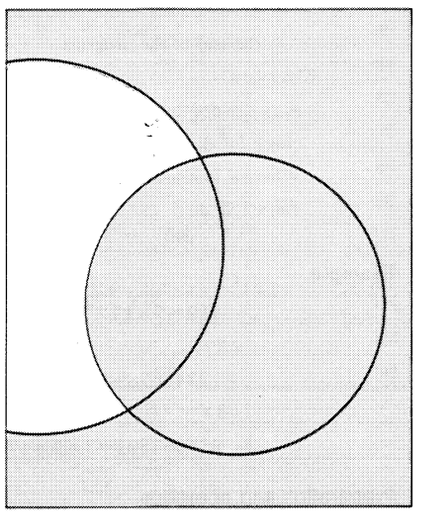

〈Prior to use〉

- Always check the number of remaining steps before attempting to store programs.
- The library is divided into two parts: a calculation section and a graph section. The calculation section shows only answers, while the graph section shows whole displays.
- To make programs in the graph section easier to follow, ↵ is used to indicate carriage returns. The [EXE] key should be pressed wherever ↵ appears (↵ does not appear on the display).
- Press the Graph key whenever "Graph" appears within a program (Graph Y = indicated).
- If it is necessary to specify a calculation mode (e.g. Base-n, SD1) in a program, be sure to specify it after pressing [MODE] [2] (WRT mode).
  Then start programming by pressing [EXE].

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Prime factor analysis** | 1 |

## Description

Prime factors of arbitrary positive integers are produced.

For $1 < m < 10^{10}$

prime numbers are produced from the lowest value first. "END" is displayed at the end of the program.

〈Overview〉

$m$ is divided by 2 and by all successive odd numbers ($d = 3, 5, 7, 9, 11, 13, \ldots\ldots$) to check for divisibility.

Where $d$ is a prime factor, $m_i = m_{i-1}/d$ is assumed, and division is repeated until $\sqrt{m_i} + 1 \leqq d$.

## Example

〈1〉

$119 = 7 \times 17$

〈2〉

$1234567890 = 2 \times 3 \times 3 \times 5 \times 3607 \times 3803$

〈3〉

$987654321 = 3 \times 3 \times 17 \times 17 \times 379721$

## Preparation and operation

- Store the program written on the next page.
- Execute the program as shown below in the RUN mode ([MODE] [1]).

| Step | Key operation | Display | Step | Key operation | Display |
|---|---|---|---|---|---|
| 1 | [Prog] 0 [EXE] | M ? | 11 | [EXE] | 3803. |
| 2 | 119 [EXE] | 7. | 12 | [EXE] | END |
| 3 | [EXE] | 17. | 13 | [EXE] | M ? |
| 4 | [EXE] | END | 14 | 987654321 [EXE] | 3. |
| 5 | [EXE] | M ? | 15 | [EXE] | 3. |
| 6 | 1234567890 [EXE] | 2. | 16 | [EXE] | 17. |
| 7 | [EXE] | 3. | 17 | [EXE] | 17. |
| 8 | [EXE] | 3. | 18 | [EXE] (After 10 seconds) | 379721. |
| 9 | [EXE] | 5. | 19 | [EXE] | END |
| 10 | [EXE] | (After 57 seconds) 3607. | 20 | | |



No. 1

| Line | [MODE] [2] Program | | | | | | | | | | | | | | | Notes | Number of steps |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | Mcl | : | | | | | | | | | | | | | | | 2 |
| 2 | Lbl | 0 | : | " | M | " | ? | → | A | : | Goto | 2 | : | | | | 15 |
| 3 | Lbl | 1 | : | 2 | ◢ | A | ÷ | 2 | → | A | : | A | = | 1 | ⇒ | | 30 |
| 4 | Goto | 9 | : | | | | | | | | | | | | | | 33 |
| 5 | Lbl | 2 | : | Frac | ( | A | ÷ | 2 | ) | = | 0 | ⇒ | Goto | 1 | : | | 48 |
| 6 | 3 | → | B | : | | | | | | | | | | | | | 52 |
| 7 | Lbl | 3 | : | √ | A | + | 1 | → | C | : | | | | | | | 62 |
| 8 | Lbl | 4 | : | B | ≥ | C | ⇒ | Goto | 8 | : | Frac | ( | A | ÷ | B | | 77 |
| 9 | ) | = | 0 | ⇒ | Goto | 6 | : | | | | | | | | | | 84 |
| 10 | Lbl | 5 | : | B | + | 2 | → | B | : | Goto | 4 | : | | | | | 96 |
| 11 | Lbl | 6 | : | A | ÷ | B | × | B | − | A | = | 0 | ⇒ | Goto | 7 | | 111 |
| 12 | : | Goto | 5 | : | | | | | | | | | | | | | 115 |
| 13 | Lbl | 7 | : | B | ◢ | A | ÷ | B | → | A | : | Goto | 3 | : | | | 129 |
| 14 | Lbl | 8 | : | A | ◢ | | | | | | | | | | | | 134 |
| 15 | Lbl | 9 | : | " | E | N | D | " | ◢ | Goto | 0 | | | | | | 145 |
| 16 | | | | | | | | | | | | | | | | | |
| 17 | | | | | | | | | | | | | | | | | |
| 18 | | | | | | | | | | | | | | | | | |
| 19 | | | | | | | | | | | | | | | | | |
| 20 | | | | | | | | | | | | | | | | | |
| 21 | | | | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | | | | |
| 23 | | | | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | | | | | | | |
| 25 | | | | | | | | | | | | | | | | | |
| 26 | | | | | | | | | | | | | | | | | |
| 27 | | | | | | | | | | | | | | | | | |
| 28 | | | | | | | | | | | | | | | | | |

| Memory contents | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| A | $m_i$ | H | | O | | V | | |
| B | $d$ | I | | P | | W | | |
| C | $\sqrt{m_i} + 1$ | J | | Q | | X | | |
| D | | K | | R | | Y | | |
| E | | L | | S | | Z | | |
| F | | M | | T | | | | |
| G | | N | | U | | | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Greatest common measure** | 2 |

## Description

Euclidean general division is used to determine the greatest common measure for two integers $a$ and $b$.

For $|a|, |b| < 10^9$, positive values are taken as $< 10^{10}$

〈Overview〉

$n_0 = \max(|a|, |b|)$

$n_1 = \min(|a|, |b|)$

$n_k = n_{k-2} - \left[\frac{n_{k-2}}{n_{k-1}}\right] n_{k-1}$

$k = 2, 3 \ldots\ldots$

If $n_k = 0$, then the greatest common measure $(c)$ will be $n_{k-1}$.

## Example

| | 〈1〉 | 〈2〉 | 〈3〉 |
|---|---|---|---|
| When | $a = 238$ | $a = 23345$ | $a = 522952$ |
| | $b = 374$ | $b = 9135$ | $b = 3208137866$ |
| | ↓ | ↓ | ↓ |
| | $c = 34$ | $c = 1015$ | $c = 998$ |

## Preparation and operation

- Store the program written on the next page.
- Execute the program as shown below in the RUN mode (MODE 1).

| Step | Key operation | Display | Step | Key operation | Display |
|---|---|---|---|---|---|
| 1 | Prog 0 EXE | A ? | 11 | | |
| 2 | 238 EXE | B ? | 12 | | |
| 3 | 374 EXE | 34. | 13 | | |
| 4 | EXE | A ? | 14 | | |
| 5 | 23345 EXE | B ? | 15 | | |
| 6 | 9135 EXE | 1015. | 16 | | |
| 7 | EXE | A ? | 17 | | |
| 8 | 522952 EXE | B ? | 18 | | |
| 9 | 3208137866 EXE | 998. | 19 | | |
| 10 | | | 20 | | |



No. 2

| Line | Program | Notes | Number of steps |
|---|---|---|---|
| 1 | Lbl 1 : " A " ? → A : " B " ? → | | 15 |
| 2 | B : | | 17 |
| 3 | Abs A → A : Abs B → B : | | 27 |
| 4 | B < A ⇒ Goto 2 : | | 34 |
| 5 | A → C : B → A : C → B : | | 46 |
| 6 | Lbl 2 : (−) ( Int ( A ÷ B ) × B − A | | 61 |
| 7 | ) → C : | | 65 |
| 8 | C = 0 ⇒ Goto 3 : | | 72 |
| 9 | B → A : C → B : Goto 2 : | | 83 |
| 10 | Lbl 3 : B ◢ Goto 1 | | 90 |
| 11 | | | |
| 12 | | | |
| 13 | | | |
| 14 | | | |
| 15 | | | |
| 16 | | | |
| 17 | | | |
| 18 | | | |
| 19 | | | |
| 20 | | | |
| 21 | | | |
| 22 | | | |
| 23 | | | |
| 24 | | | |
| 25 | | | |
| 26 | | | |
| 27 | | | |
| 28 | | | |

**Memory contents**

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| A | $a, n_0$ | H | | O | | V | |
| B | $b, n_1$ | I | | P | | W | |
| C | $n_k$ | J | | Q | | X | |
| D | | K | | R | | Y | |
| E | | L | | S | | Z | |
| F | | M | | T | | | |
| G | | N | | U | | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Definite integrals using Simpson's rule** | 3 |

## Description

$$I=\int_a^b f(x)dx=\frac{h}{3}\{y_0+4(y_1+y_3+\ \cdots\ +y_{2m-1})+2(y_2+y_4+\ \cdots\ +y_{2m-2})+y_{2m}\}$$

$$h=\frac{b-a}{2m}$$

The right-hand portion of the above equation can be transformed as follows.

$$I=\frac{h}{3}\{y_0+\sum_{i=1}^{m}(4y_{2i-1}+2y_{2i})-y_{2m}\}$$

Let $f(x)=\frac{1}{x^2+1}$

## Example

〈1〉 $a=0,\ b=1,\ 2m=10$

$$I=\int_0^1\frac{1}{x^2+1}dx=0.7853981537$$

〈2〉 $a=2,\ b=5,\ 2m=20$

$$I=\int_2^5\frac{1}{x^2+1}dx=0.2662526769$$

## Preparation and operation

- Store the program written on the next page.
- Execute the program as shown below in the RUN mode ([MODE] [1]).

| Step | Key operation | Display | Step | Key operation | Display |
|---|---|---|---|---|---|
| 1 | [Prog] 0 [EXE] | A ? | 11 | | |
| 2 | 0 [EXE] | B ? | 12 | | |
| 3 | 1 [EXE] | 2 M ? | 13 | | |
| 4 | 10 [EXE] | 0.7853981535 | 14 | | |
| 5 | [EXE] | A ? | 15 | | |
| 6 | 2 [EXE] | B ? | 16 | | |
| 7 | 5 [EXE] | 2 M ? | 17 | | |
| 8 | 20 [EXE] | 0.2662526769 | 18 | | |
| 9 | | | 19 | | |
| 10 | | | 20 | | |



No. 3

| Line | [MODE] [2] Program | | | | | | | | | | | | | | Notes | Number of steps |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | P0 | | | | | | | | | | | | | | | |
| 2 | Lbl | 1 | : | Mcl | : | | | | | | | | | | | 5 |
| 3 | " | A | " | ? | → | A | : | " | B | " | ? | → | B | : | " | 20 |
| 4 | 2 | M | " | ? | → | M | : | | | | | | | | | 27 |
| 5 | A | → | G | : | Prog | 1 | : | P | → | I | : | ( | B | − | A | 42 |
| 6 | ) | ÷ | M | → | D | : | M | ÷ | 2 | → | O | : | | | | 54 |
| 7 | Lbl | 2 | : | G | + | D | → | G | : | Prog | 1 | : | I | + | P | 69 |
| 8 | × | 4 | → | I | : | | | | | | | | | | | 74 |
| 9 | G | + | D | → | G | : | Prog | 1 | : | I | + | P | × | 2 | → | 89 |
| 10 | I | : | O | − | 1 | → | O | : | | | | | | | | 97 |
| 11 | O | ≠ | 0 | ⇒ | Goto | 2 | : | | | | | | | | | 104 |
| 12 | B | → | G | : | Prog | 1 | : | I | − | P | → | I | : | | | 117 |
| 13 | D | × | I | ÷ | 3 | ◢ | | | | | | | | | | 123 |
| 14 | Goto | 1 | | | | | | | | | | | | | | 125 |
| 15 | | | | | | | | | | | | | | | | |
| 16 | P1 | | | | | | | | | | | | | | | |
| 17 | 1 | ÷ | ( | G | × | G | + | 1 | ) | → | P | | | | | 11 |
| 18 | | | | | | | | | | | | | | | | |
| 19 | | | | | | | | | | | | | | | Total 136 steps | |
| 20 | | | | | | | | | | | | | | | | |
| 21 | | | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | | | |
| 23 | | | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | | | | | | |
| 25 | | | | | | | | | | | | | | | | |
| 26 | | | | | | | | | | | | | | | | |
| 27 | | | | | | | | | | | | | | | | |
| 28 | | | | | | | | | | | | | | | | |

**Memory contents**

| | | | | | | | | | |
|---|---|---|---|---|---|---|---|---|---|
| A | $a$ | H | | O | $m$ (Number of repetitions) | V | | | |
| B | $b$ | I | I | P | | W | | | |
| C | | J | | Q | | X | | | |
| D | $h=\frac{b-a}{2m}$ | K | | R | | Y | | | |
| E | | L | | S | | Z | | | |
| F | | M | $2m$ | T | | | | | |
| G | $x$ | N | | U | | | | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| △ ⟷ Y transformation | 4 |

## Description

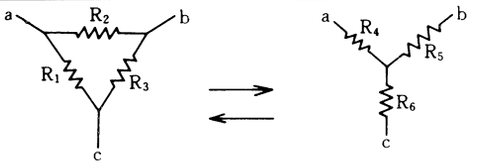


1) △→Y

$$R_4=\frac{R_1\cdot R_2}{R_1+R_2+R_3}$$

$$R_5=\frac{R_2\cdot R_3}{R_1+R_2+R_3}$$

$$R_6=\frac{R_3\cdot R_1}{R_1+R_2+R_3}$$

2) Y→△

$$R_1=\frac{R_4R_5+R_5R_6+R_6R_4}{R_5}$$

$$R_2=\frac{R_4R_5+R_5R_6+R_6R_4}{R_6}$$

$$R_3=\frac{R_4R_5+R_5R_6+R_6R_4}{R_4}$$

## Example

〈1〉

$R_1=12(\Omega)$
$R_2=47(\Omega)$
$R_3=82(\Omega)$

〈2〉

$R_4=100(\Omega)$
$R_5=150(\Omega)$
$R_6=220(\Omega)$

## Preparation and operation

- Store the program written on the next page.
- Execute the program as shown below in the RUN mode (MODE 1).

| Step | Key operation | Display | Step | Key operation | Display |
|---|---|---|---|---|---|
| 1 | Prog 0 EXE | D→Y:1,Y→D:2? | 11 | EXE | D→Y:1,Y→D:2? |
| 2 | 1 EXE | R 1= ? | 12 | 2 EXE | R 4= ? |
| 3 | 12 EXE | R 2= ? | 13 | 100 EXE | R 5= ? |
| 4 | 47 EXE | R 3= ? | 14 | 150 EXE | R 6= ? |
| 5 | 82 EXE | R 4= | 15 | 220 EXE | R 1= |
| 6 | EXE | 4. | 16 | EXE | 466.6666667 |
| 7 | EXE | R 5= | 17 | EXE | R 2= |
| 8 | EXE | 27.33333333 | 18 | EXE | 318.1818182 |
| 9 | EXE | R 6= | 19 | EXE | R 3= |
| 10 | EXE | 6.978723404 | 20 | EXE | 700. |



No. 4

| Line | MODE 2 Program | | | | | | | | | | | | | | | Notes | Number of steps |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | Lbl | 1 | : | " | D | → | Y | : | 1 | , | Y | → | D | : | 2 | | 15 |
| 2 | " | ? | → | N | : | | | | | | | | | | | | 20 |
| 3 | N | = | 2 | ⇒ | Goto | 2 | : | N | ≠ | 1 | ⇒ | Goto | 1 | : | | | 34 |
| 4 | " | R | 1 | = | " | ? | → | A | : | | | | | | | | 43 |
| 5 | " | R | 2 | = | " | ? | → | B | : | | | | | | | | 52 |
| 6 | " | R | 3 | = | " | ? | → | C | : | | | | | | | | 61 |
| 7 | A | + | B | + | C | → | D | : | | | | | | | | | 69 |
| 8 | " | R | 4 | = | " | ◢ | A | × | B | ÷ | D | ◢ | | | | | 81 |
| 9 | " | R | 5 | = | " | ◢ | B | × | C | ÷ | D | ◢ | | | | | 93 |
| 10 | " | R | 6 | = | " | ◢ | A | × | C | ÷ | D | ◢ | | | | | 105 |
| 11 | Goto | 1 | : | | | | | | | | | | | | | | 108 |
| 12 | Lbl | 2 | : | | | | | | | | | | | | | | 111 |
| 13 | " | R | 4 | = | " | ? | → | E | : | | | | | | | | 120 |
| 14 | " | R | 5 | = | " | ? | → | F | : | | | | | | | | 129 |
| 15 | " | R | 6 | = | " | ? | → | G | : | | | | | | | | 138 |
| 16 | E | × | F | + | F | × | G | + | G | × | E | → | H | : | | | 152 |
| 17 | " | R | 1 | = | " | ◢ | H | ÷ | F | ◢ | | | | | | | 162 |
| 18 | " | R | 2 | = | " | ◢ | H | ÷ | G | ◢ | | | | | | | 172 |
| 19 | " | R | 3 | = | " | ◢ | H | ÷ | E | ◢ | | | | | | | 182 |
| 20 | Goto | 1 | | | | | | | | | | | | | | | 184 |
| 21 | | | | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | | | | |
| 23 | | | | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | | | | | | | |
| 25 | | | | | | | | | | | | | | | | | |
| 26 | | | | | | | | | | | | | | | | | |
| 27 | | | | | | | | | | | | | | | | | |
| 28 | | | | | | | | | | | | | | | | | |

**Memory contents**

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| A | $R_1$ | H | $R_4R_5+R_5R_6+R_6R_4$ | O | | V | |
| B | $R_2$ | I | | P | | W | |
| C | $R_3$ | J | | Q | | X | |
| D | $R_1+R_2+R_3$ | K | | R | | Y | |
| E | $R_4$ | L | | S | | Z | |
| F | $R_5$ | M | | T | | | |
| G | $R_6$ | N | For judgement | U | | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Minimum loss matching** | 5 |

## Description

Calculate $R_1$ and $R_2$ which match $Z_0$ and $Z_1$ with loss minimized. ($Z_0 > Z_1$)




$$R_1 = Z_0\sqrt{1-\frac{Z_1}{Z_0}} \qquad R_2 = \frac{Z_1}{\sqrt{1-\frac{Z_1}{Z_0}}}$$

$$\text{Minimum loss } L_{min} = 20 \log\left(\sqrt{\frac{Z_0}{Z_1}} + \sqrt{\frac{Z_0}{Z_1}-1}\right) [\text{dB}]$$

## Example

Calculate the values of $R_1$, $R_2$ and $L_{min}$ for $Z_0 = 500\,\Omega$ and $Z_1 = 200\,\Omega$.

## Preparation and operation

- Store the program written on the next page.
- Execute the program as shown below in the RUN mode (MODE 1).

| Step | Key operation | Display | Step | Key operation | Display |
|---|---|---|---|---|---|
| 1 | Prog 0 EXE | Z 0= ? | 11 | | |
| 2 | 500 EXE | Z 1= ? | 12 | | |
| 3 | 200 EXE | R 1= | 13 | | |
| 4 | EXE | 387.2983346 | 14 | | |
| 5 | EXE | R 2= | 15 | | |
| 6 | EXE | 258.1988897 | 16 | | |
| 7 | EXE | LMIN = | 17 | | |
| 8 | EXE | 8.961393328 | 18 | | |
| 9 | | | 19 | | |
| 10 | | | 20 | | |



No. 5

| Line | Program | Notes | Number of steps |
|---|---|---|---|
| 1 | " Z 0 = " ? → Y : | | 9 |
| 2 | " Z 1 = " ? → Z : | | 18 |
| 3 | √( 1 − Z ÷ Y ) → A : | | 29 |
| 4 | Y × A → R : Z ÷ A → S : Y ÷ Z | | 44 |
| 5 | → B : 2 0 × log ( √ B + √ ( B − | | 59 |
| 6 | 1 ) ) → T : | | 65 |
| 7 | " R 1 = " ◢ R ◢ | | 73 |
| 8 | " R 2 = " ◢ S ◢ | | 81 |
| 9 | " L M I N = " : T | | 90 |
| 10 | | | |
| 11 | | | |
| 12 | | | |
| 13 | | | |
| 14 | | | |
| 15 | | | |
| 16 | | | |
| 17 | | | |
| 18 | | | |
| 19 | | | |
| 20 | | | |
| 21 | | | |
| 22 | | | |
| 23 | | | |
| 24 | | | |
| 25 | | | |
| 26 | | | |
| 27 | | | |
| 28 | | | |

**Memory contents**

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| A | $\sqrt{1-\frac{Z_1}{Z_0}}$ | H | | O | | V | |
| B | $\frac{Z_0}{Z_1}$ | I | | P | | W | |
| C | | J | | Q | | X | |
| D | | K | | R | R 1 | Y | $Z_0$ |
| E | | L | | S | R 2 | Z | $Z_1$ |
| F | | M | | T | Lmin | | |
| G | | N | | U | | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Cantilever under concentrated load** | 6 |

## Description




E : Young's modulus [kg/mm²]
I : Geometrical moment of inertia [mm⁴]
$a$ : Distance of concentrated load from support [mm]
P : Load [kg]
$x$ : Distance of point of interest from the support [mm]

Deflection $y$ [mm], Angle of deflection $s$ [°], Bending moment M [kg · mm]

① $\ell > x > a$

$$y = \frac{Pa^3}{6EI} - \frac{Pa^2}{2EI}x$$

$$s = \tan^{-1}\left(-\frac{Pa^2}{2EI}\right)$$

M = 0 (shearing load Ws = 0)

② $x \leqq a$

$$y = \frac{P}{6EI}x^3 - \frac{Pa}{2EI}x^2$$

$$s = \tan^{-1}\left\{\frac{Px}{2EI}(x - 2a)\right\}$$

M = P ($x - a$) (shearing load Ws = P)

## Example

E = 4000 kg/mm²
I = 5 mm⁴
$a$ = 30 mm
P = 2 kg

What are deflection, angle of deflection, bending moment and shearing load at $x$ = 25 mm and $x$ = 32 mm ?

## Preparation and operation

- Store the program written on the next page.
- Execute the program as shown below in the RUN mode (MODE 1).

| Step | Key operation | Display | Step | Key operation | Display |
|---|---|---|---|---|---|
| 1 | Prog 0 EXE | E = ? | 11 | EXE | −10. |
| 2 | 4000 EXE | I = ? | 12 | EXE | X = ? |
| 3 | 5 EXE | A = ? | 13 | 32 EXE | Y = |
| 4 | 30 EXE | P = ? | 14 | EXE | −0.99 |
| 5 | 2 EXE | X = ? | 15 | EXE | S = |
| 6 | 25 EXE | Y = | 16 | EXE | −2.57657183 |
| 7 | EXE | −0.6770833333 | 17 | EXE | M = |
| 8 | EXE | S = | 18 | EXE | 0. |
| 9 | EXE | −2.505092867 | 19 | Repeat from step 5 | |
| 10 | EXE | M = | 20 | | |



No. 6

| Line | MODE 2 | Program | | | | | | | | | | | | | | Notes | Number of steps |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | Deg | : | " | E | = | " | ? | → | E | : | " | I | = | " | ? | | 15 |
| 2 | → | I | : | " | A | = | " | ? | → | A | : | " | P | = | " | | 30 |
| 3 | ? | → | P | : | | | | | | | | | | | | | 34 |
| 4 | Lbl | 1 | : | " | X | = | " | ? | → | X | : | | | | | | 45 |
| 5 | X | ≤ | A | ⇒ | Goto | 2 | : | | | | | | | | | | 52 |
| 6 | " | Y | = | " | ◢ | P | × | A | $x^2$ | ÷ | ( | 2 | × | E | × | | 67 |
| 7 | I | ) | × | ( | A | ÷ | 3 | − | X | ) | ◢ | | | | | | 78 |
| 8 | " | S | = | " | ◢ | $\tan^{-1}$ | ( | (−) | P | × | A | $x^2$ | ÷ | ( | 2 | | 93 |
| 9 | × | E | × | I | ) | ) | ◢ | " | M | = | " | ◢ | 0 | ◢ | | | 107 |
| 10 | Goto | 1 | : | | | | | | | | | | | | | | 110 |
| 11 | Lbl | 2 | : | | | | | | | | | | | | | | 113 |
| 12 | " | Y | = | " | ◢ | P | × | X | $x^2$ | ÷ | ( | 2 | × | E | × | | 129 |
| 13 | I | ) | × | ( | X | ÷ | 3 | − | A | ) | ◢ | | | | | | 139 |
| 14 | " | S | = | " | ◢ | $\tan^{-1}$ | ( | P | × | X | ÷ | ( | 2 | × | E | | 154 |
| 15 | × | I | ) | × | ( | X | − | 2 | × | A | ) | ) | ◢ | | | | 167 |
| 16 | " | M | = | " | ◢ | P | × | ( | X | − | A | ) | ◢ | | | | 180 |
| 17 | Goto | 1 | | | | | | | | | | | | | | | 182 |
| 18 | | | | | | | | | | | | | | | | | |
| 19 | | | | | | | | | | | | | | | | | |
| 20 | | | | | | | | | | | | | | | | | |
| 21 | | | | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | | | | |
| 23 | | | | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | | | | | | | |
| 25 | | | | | | | | | | | | | | | | | |
| 26 | | | | | | | | | | | | | | | | | |
| 27 | | | | | | | | | | | | | | | | | |
| 28 | | | | | | | | | | | | | | | | | |

**Memory contents**

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| A | a | H | | O | | V | |
| B | | I | I | P | P | W | |
| C | | J | | Q | | X | $x$ |
| D | | K | | R | | Y | |
| E | E | L | | S | | Z | |
| F | | M | | T | | | |
| G | | N | | U | | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Parabolic movement** | 7 |

## Description




$x = (V_0 \cos a) \cdot t$

$y = (V_0 \sin a) \cdot t - \frac{1}{2} g t^2 + h$

$g = 9.8\ [m/s^2]$

$V_0$ [m/s]

a [°]

$\Delta$ t [sec.]

h [m]

## Example

Initial velocity $V_0 = 130$ (m/sec.)

Initial angle a = 25 (°)

Height h = 0 (m)

$\Delta$ t = 0.5 (sec.)

Plot the trace of movement in intervals of $\Delta$t.

## Preparation and operation

- Store the program written on the next page.
- Execute the program as shown below in the RUN mode (MODE 1).

| Step | Key operation | Display | Step | Key operation | Display |
|---|---|---|---|---|---|
| 1 | Prog 0 EXE | V 0= ? | 11 | EXE | T = |
| 2 | 130 EXE | A = ? | 12 | EXE | 0.5 |
| 3 | 25 EXE | H = ? | 13 | EXE | X = |
| 4 | 0 EXE | T = ? | 14 | EXE | 58.91000616 |
| 5 | 0.5 EXE | T = | 15 | EXE | Y = |
| 6 | EXE | 0. | 16 | EXE | 26.24518701 |
| 7 | EXE | X = | 17 | Repeat from step 11 | |
| 8 | EXE | 0. | 18 | | |
| 9 | EXE | Y = | 19 | | |
| 10 | EXE | 0. | 20 | | |



No. 7

| Line | Program | Notes | Number of steps |
|---|---|---|---|
| 1 | MODE 2 Deg : 0 → S : | | 6 |
| 2 | " V 0 = " ? → V : " A = " ? → | | 21 |
| 3 | A : " H = " ? → H : " T = " ? | | 36 |
| 4 | → T : | | 39 |
| 5 | Lbl 1 : V × cos A × S → X : V × sin | | 54 |
| 6 | A × S − 9 . 8 × S $x^2$ ÷ 2 + H → | | 69 |
| 7 | Y : | | 71 |
| 8 | " T = " ◢ S ◢ S + T → S : | | 84 |
| 9 | " X = " ◢ X ◢ " Y = " ◢ Y ◢ | | 98 |
| 10 | Y ≥ 0 ⇒ Goto 1 | | 104 |
| 11 | | | |
| 12 | | | |
| 13 | | | |
| 14 | | | |
| 15 | | | |
| 16 | | | |
| 17 | | | |
| 18 | | | |
| 19 | | | |
| 20 | | | |
| 21 | | | |
| 22 | | | |
| 23 | | | |
| 24 | | | |
| 25 | | | |
| 26 | | | |
| 27 | | | |
| 28 | | | |

**Memory contents**

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| A | *a* | H | *h* | O | | V | $V_0$ |
| B | | I | | P | | W | |
| C | | J | | Q | | X | |
| D | | K | | R | | Y | |
| E | | L | | S | | Z | |
| F | | M | | T | $\Delta$ t | | |
| G | | N | | U | | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Normal distribution** | 8 |

## Description

Obtain normal distribution function $\phi(x)$ (by Hastings' best approximation).

$$\phi(x) = \int_{-\infty}^{t} \phi t \, dx$$

$$\phi t = \frac{1}{\sqrt{2\pi}} e^{-\frac{x^2}{2}}$$




Put $t = \dfrac{1}{1+Px}$

$$\phi(x) \doteqdot 1 - \phi t \, (c_1 t + c_2 t^2 + c_3 t^3 + c_4 t^4 + c_5 t^5)$$

$P = 0.2316419$

$C_1 = 0.31938153$

$C_2 = -0.356563782$

$C_3 = 1.78147937$

$C_4 = -1.821255978$

$C_5 = 1.330274429$

## Example

Calculate the values of $\phi(x)$ at $x = 1.18$ and $x = 0.7$.

## Preparation and operation

- Store the program written on the next page.
- Execute the program as shown below in the RUN mode (MODE 1).

| Step | Key operation | Display | Step | Key operation | Display |
|---|---|---|---|---|---|
| 1 | Prog 0 EXE | X = ? | 11 | | |
| 2 | 1.18 EXE | PX = | 12 | | |
| 3 | EXE | 0.880999696 | 13 | | |
| 4 | Prog 0 EXE | X = ? | 14 | | |
| 5 | 0.7 EXE | PX = | 15 | | |
| 6 | EXE | 0.7580361367 | 16 | | |
| 7 | | | 17 | | |
| 8 | | | 18 | | |
| 9 | | | 19 | | |
| 10 | | | 20 | | |



No. 8

| Line | MODE 2 Program | | | | | | | | | | | | | | | Notes | Number of steps |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | " | X | = | " | ? | → | X | : | | | | | | | | | 8 |
| 2 | 1 | ÷ | ( | 1 | + | 0 | . | 2 | 3 | 1 | 6 | 4 | 1 | 9 | × | | 23 |
| 3 | X | ) | → | T | : | 1 | ÷ | √ | ( | 2 | × | π | ) | × | $e^x$ | | 38 |
| 4 | ( | (−) | X | $x^2$ | ÷ | 2 | ) | → | Q | : | | | | | | | 48 |
| 5 | " | P | X | = | " | ◢ | 1 | − | Q | × | ( | 0 | . | 3 | 1 | | 63 |
| 6 | 9 | 3 | 8 | 1 | 5 | 3 | × | T | + | (−) | 0 | . | 3 | 5 | 6 | | 78 |
| 7 | 5 | 6 | 3 | 7 | 8 | 2 | × | T | $x^2$ | + | 1 | . | 7 | 8 | 1 | | 93 |
| 8 | 4 | 7 | 9 | 3 | 7 | × | T | $x^y$ | 3 | + | (−) | 1 | . | 8 | 2 | | 108 |
| 9 | 1 | 2 | 5 | 5 | 9 | 7 | 8 | × | T | $x^y$ | 4 | + | 1 | . | 3 | | 123 |
| 10 | 3 | 0 | 2 | 7 | 4 | 4 | 2 | 9 | × | T | $x^y$ | 5 | ) | | | | 136 |
| 11 | | | | | | | | | | | | | | | | | |
| 12 | | | | | | | | | | | | | | | | | |
| 13 | | | | | | | | | | | | | | | | | |
| 14 | | | | | | | | | | | | | | | | | |
| 15 | | | | | | | | | | | | | | | | | |
| 16 | | | | | | | | | | | | | | | | | |
| 17 | | | | | | | | | | | | | | | | | |
| 18 | | | | | | | | | | | | | | | | | |
| 19 | | | | | | | | | | | | | | | | | |
| 20 | | | | | | | | | | | | | | | | | |
| 21 | | | | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | | | | |
| 23 | | | | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | | | | | | | |
| 25 | | | | | | | | | | | | | | | | | |
| 26 | | | | | | | | | | | | | | | | | |
| 27 | | | | | | | | | | | | | | | | | |
| 28 | | | | | | | | | | | | | | | | | |

**Memory contents**

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| A | | H | | O | | V | |
| B | | I | | P | | W | |
| C | | J | | Q | $\phi t$ | X | $x$ |
| D | | K | | R | | Y | |
| E | | L | | S | | Z | |
| F | | M | | T | $t$ | | |
| G | | N | | U | | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Circle and points of tangency** | 9 |

## Description

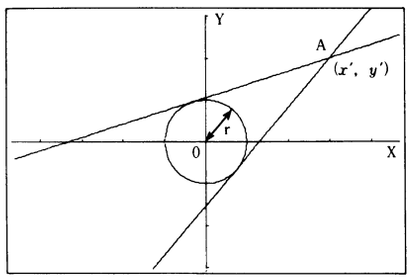


Circle formula

$x^2+y^2=r^2$

Formula for tangent lines passing through point A $(x', y')$

$y-y'=m(x-x')$

* $m$ is the tangent line slope

Draw a line from point A $(x', y')$ to a circle with radius $r$, and determine the slope $m$ and intercept b $(=y'-mx')$. Also, read the coordinates of the tangent using the trace function, and use the factor function to magnify the graph.

## Example

$r=1$
$x'=3$
$y'=2$

$m$ and b are determined using these values.

## ⟨NOTE⟩

- $r=x'$ generates an Ma ERROR.

## Preparation and operation

● Store the program written on the next page.

| Memory contents | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | A | | H | | O | | V | |
| | B | | I | | P | | W | |
| | C | | J | | Q | | X | |
| | D | | K | | R | | Y | |
| | E | | L | | S | | Z | |
| | F | | M | | T | | | |
| | G | | N | | U | | | |



No. 9

| Line | MODE 2 | Program | | | | | | | | | | | | | Notes | Number of steps |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | PØ | | | | | | | | | | | | | | | |
| 2 | Prog | 1 | ↵ | | | | | | | | | | | | | 3 |
| 3 | " | X | $x^2$ | + | Y | $x^2$ | = | R | $x^2$ | ↵ | | | | | | 13 |
| 4 | R | = | " | ? | → | R | ↵ | | | | | | | | | 20 |
| 5 | Prog | 2 | ◢ | | | | | | | | | | | | | 23 |
| 6 | " | ( | X | , | Y | ) | ↵ | | | | | | | | | 30 |
| 7 | X | = | " | ? | → | A | ↵ | | | | | | | | | 37 |
| 8 | " | Y | = | " | → | B | ↵ | | | | | | | | | 45 |
| 9 | Plot | A | , | B | ◢ | | | | | | | | | | | 50 |
| 10 | R | $x^2$ | ( | A | $x^2$ | + | B | $x^2$ | − | R | $x^2$ | ) | → | P | ↵ | 65 |
| 11 | ( | √ | P | − | A | B | ) | ( | R | $x^2$ | − | A | $x^2$ | ) | $x^{-1}$ | 80 |
| 12 | → | M | ↵ | | | | | | | | | | | | | 83 |
| 13 | Lbl | 6 | ↵ | | | | | | | | | | | | | 86 |
| 14 | Graph | M | ( | X | − | A | ) | + | B | ◢ | | | | | | 96 |
| 15 | " | M | = | " | ◢ | M | ◢ | | | | | | | | | 103 |
| 16 | " | B | = | " | ◢ | B | − | M | A | ◢ | | | | | | 113 |
| 17 | Lbl | Ø | ↵ | | | | | | | | | | | | | 116 |
| 18 | " | T | R | A | C | E | ? | ↵ | | | | | | | | 124 |
| 19 | Y | E | S | ⇒ | 1 | ↵ | | | | | | | | | | 130 |
| 20 | N | O | ⇒ | Ø | " | : | ? | → | Z | ↵ | | | | | | 140 |
| 21 | 1 | → | S | : | Z | = | 1 | ⇒ | Goto | 1 | ↵ | | | | | 151 |
| 22 | Z | = | Ø | ⇒ | Goto | 2 | : | Goto | Ø | ↵ | | | | | | 161 |
| 23 | Lbl | 2 | ↵ | | | | | | | | | | | | | 164 |
| 24 | ( | (−) | A | B | − | √ | P | ) | ( | R | $x^2$ | − | A | $x^2$ | ) | 179 |
| 25 | $x^{-1}$ | → | N | ↵ | | | | | | | | | | | | 183 |
| 26 | Graph | N | ( | X | − | A | ) | + | B | ◢ | | | | | | 193 |
| 27 | " | M | = | " | ◢ | N | ◢ | | | | | | | | | 200 |
| 28 | " | B | = | " | ◢ | B | − | N | A | ◢ | | | | | | 210 |
| 29 | Lbl | 5 | ↵ | | | | | | | | | | | | | 213 |
| 30 | " | T | R | A | C | E | ? | ↵ | | | | | | | | 221 |
| 31 | Y | E | S | ⇒ | 1 | ↵ | | | | | | | | | | 227 |
| 32 | N | O | ⇒ | Ø | " | : | ? | → | Z | ↵ | | | | | | 237 |
| 33 | 2 | → | S | : | Z | = | 1 | ⇒ | Goto | 1 | ↵ | | | | | 248 |
| 34 | Z | = | Ø | ⇒ | Goto | 3 | : | Goto | 5 | ↵ | | | | | | 258 |
| 35 | Lbl | 1 | ↵ | | | | | | | | | | | | | 261 |
| 36 | " | T | R | A | C | E | " | ◢ | | | | | | | | 269 |

No. 9

| Line | MODE 2 Program | | | | | | | | | | | | | | Notes | Number of steps |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | " | Factor | N | : | N | = | " | ? | → | F | : | Factor | F | ↵ | | 283 |
| 2 | Prog | 2 | : | S | = | 1 | ⇒ | Goto | 9 | ↵ | | | | | | 293 |
| 3 | S | = | 2 | ⇒ | Graph | M | ( | X | − | A | ) | + | B | ↵ | | 307 |
| 4 | Graph | N | ( | X | − | A | ) | + | B | ◢ | | | | | | 317 |
| 5 | Goto | 3 | ↵ | | | | | | | | | | | | | 320 |
| 6 | Lbl | 9 | ↵ | | | | | | | | | | | | | 323 |
| 7 | Graph | M | ( | X | − | A | ) | + | B | ◢ | | | | | | 333 |
| 8 | Prog | 1 | : | Prog | 2 | : | Goto | 6 | ↵ | | | | | | | 342 |
| 9 | Lbl | 3 | ↵ | | | | | | | | | | | | | 345 |
| 10 | " | E | N | D | " | | | | | | | | | | | 350 |
| 11 | | | | | | | | | | | | | | | | |
| 12 | P1 | | | | | | | | | | | | | | | |
| 13 | Range | (−) | 4 | . | 7 | , | 4 | . | 7 | , | 1 | , | (−) | 3 | . | 15 |
| 14 | 1 | , | 3 | . | 1 | , | 1 | | | | | | | | | 22 |
| 15 | | | | | | | | | | | | | | | | |
| 16 | P2 | | | | | | | | | | | | | | | |
| 17 | Graph | √ | ( | R | $x^2$ | − | X | $x^2$ | ) | ↵ | | | | | | 10 |
| 18 | Graph | (−) | √ | ( | R | $x^2$ | − | X | $x^2$ | ) | | | | | | 20 |
| 19 | | | | | | | | | | | | | | | | |
| 20 | | | | | | | | | | | | | | | Total 392 steps | |
| 21 | | | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | | | |
| 23 | | | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | | | | | | |
| 25 | | | | | | | | | | | | | | | | |
| 26 | | | | | | | | | | | | | | | | |
| 27 | | | | | | | | | | | | | | | | |
| 28 | | | | | | | | | | | | | | | | |
| 29 | | | | | | | | | | | | | | | | |
| 30 | | | | | | | | | | | | | | | | |
| 31 | | | | | | | | | | | | | | | | |
| 32 | | | | | | | | | | | | | | | | |
| 33 | | | | | | | | | | | | | | | | |
| 34 | | | | | | | | | | | | | | | | |
| 35 | | | | | | | | | | | | | | | | |
| 36 | | | | | | | | | | | | | | | | |



Program for **Circle and points of tangency** No. 9

| Step | Key operation | Display |
|---|---|---|
| 1 | Prog 0 EXE | Prog 0<br>$X^2+Y^2=R^2$<br>R=? |
| 2 | 1 EXE | 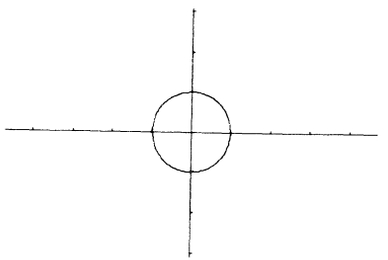 |
| 3 | EXE | Prog 0<br>$X^2+Y^2=R^2$<br>R=?<br>1<br>done<br>(X, Y)<br>X=? |
| 4 | 3 EXE<br>2 EXE | 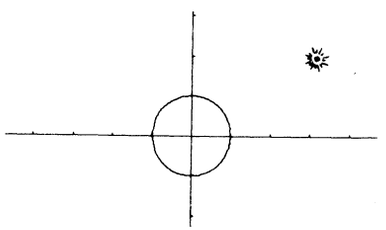 <br>X=3. |

Program for **Circle and points of tangency** | No. 9

| Step | Key operation | Display |
|---|---|---|
| 5 | EXE | 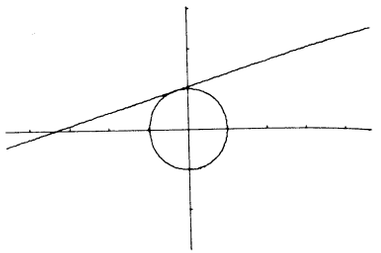 |
| 6 | EXE<br><br><br><br>EXE | 3<br>Y=?<br>2<br>done<br>done<br>M=<br>0.3169872981<br>– Disp – |
| 7 | EXE<br><br><br><br>EXE | 2<br>done<br>done<br>M=<br>0.3169872981<br>B=<br>1.049038106<br>– Disp – |
| 8 | EXE | M=<br>0.3169872981<br>B=<br>1.049038106<br>TRACE?<br>YES⇒1<br>NO⇒0<br>? |



Program for **Circle and points of tangency** | No. 9

| Step | Key operation | Display |
|---|---|---|
| 9 | 0 EXE | 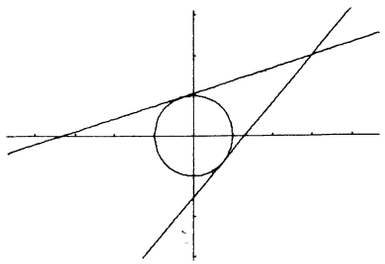 |
| 10 | EXE<br><br><br><br>EXE | YES⇒1<br>NO⇒0<br>?<br>0<br>done<br>M=<br>1.183012702<br>– Disp – |
| 11 | EXE<br><br><br><br>EXE | ?<br>0<br>done<br>M=<br>1.183012702<br>B=<br>−1.549038106<br>– Disp – |
| 12 | EXE | M=<br>1.183012702<br>B=<br>−1.549038106<br>TRACE?<br>YES⇒1<br>NO⇒0<br>? |

| Program for Circle and points of tangency | No. 9 |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| 13 | 1 [EXE] | −1.549038106<br>TRACE?<br>YES⇒1<br>NO⇒0<br>?<br>1<br>TRACE<br>— Disp — |
| 14 | [Trace] | 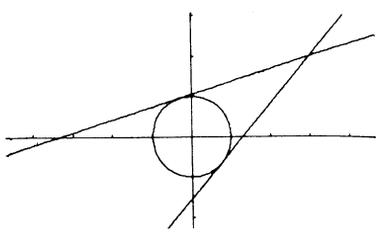 <br>X=−1.3 |
| 15 | [▷] ~ | 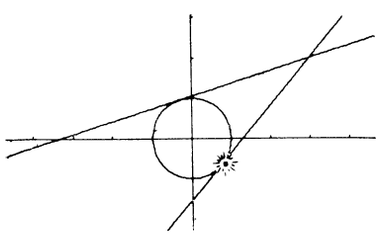 <br>X=0.8 |
| 16 | [SHIFT] [X↔Y] | 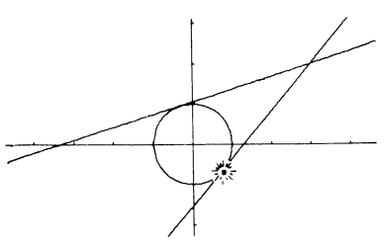 <br>Y=−0.6026279442 |



| Program for Circle and points of tangency | No. 9 |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| 17 | [EXE] | −1.549038106<br>TRACE?<br>YES⇒1<br>NO⇒0<br>?<br>1<br>TRACE<br>Factor N:N=? |
| 18 | 4 [EXE] | 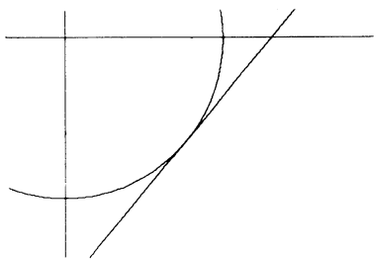 |
| 19 | [EXE] | NO⇒0<br>?<br>1<br>TRACE<br>Factor N:N=?<br>4<br>done<br>END |
| 20 | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Rotation of figures** | **10** |

## Description

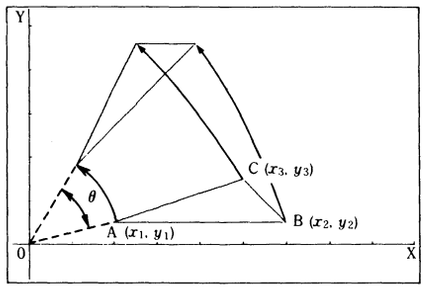


Coordinate conversion formula

$(x, y) \rightarrow (x', y')$

$x' = x \cos\theta - y \sin\theta$

$y' = x \sin\theta + y \cos\theta$

Draw a figure that represents a degree rotation of a triangle.

## Example

Draw the figure of the triangle (A (2, 0.5), B (6, 0.5), C (5, 1.5)) rotated 45°

## ⟨NOTE⟩

- The blinking point can be moved using the cursor keys.
- To terminate the program, press the [AC] key during graph display.
- A triangle cannot be drawn if the converted coordinates (E' (set the value of $x$ to 5.)) exceed the preset range values.

## Preparation and operation

● Store the program written on the next page.

| Memory contents | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| A | $x_1$ | H | $y'_1$ | O | | V | | |
| B | $y_1$ | I | $x'_2$ | P | | W | | |
| C | $x_2$ | J | $y'_2$ | Q | $\theta$ | X | | |
| D | $y_2$ | K | $x'_3$ | R | | Y | | |
| E | $x_3$ | L | $y'_3$ | S | | Z | | |
| F | $y_3$ | M | | T | | | | |
| G | $x'_1$ | N | | U | | | | |



No. 10

| Line | Program | Notes | Number of steps |
|---|---|---|---|
| 1 | Range (−) 0 . 4 , 9 , 1 , (−) 0 . 8 , | | 15 |
| 2 | 5 . 4 , 1 : Deg ↵ | | 23 |
| 3 | " ( X 1 , Y 1 ) ↵ | | 32 |
| 4 | X 1 = " ? → A ↵ | | 40 |
| 5 | " Y 1 = " ? → B ↵ | | 49 |
| 6 | Plot A , B ◢ | | 54 |
| 7 | X → A : Y → B ↵ | | 62 |
| 8 | " ( X 2 , Y 2 ) ↵ | | 71 |
| 9 | X 2 = " ? → C ↵ | | 79 |
| 10 | " Y 2 = " ? → D ↵ | | 88 |
| 11 | Plot C , D ◢ | | 93 |
| 12 | X → C : Y → B ↵ | | 101 |
| 13 | " ( X 3 , Y 3 ) ↵ | | 110 |
| 14 | X 3 = " ? → E ↵ | | 118 |
| 15 | " Y 3 = " ? → F ↵ | | 127 |
| 16 | Plot E , F ◢ | | 132 |
| 17 | X → E : Y → F ↵ | | 140 |
| 18 | Lbl 1 ↵ | | 143 |
| 19 | Line : Plot A , B : Line : Plot C , D : Line | | 158 |
| 20 | ◢ | | 159 |
| 21 | " A N G L E : Deg " ? → Q ↵ | | 172 |
| 22 | A cos Q − B sin Q → G ↵ | | 182 |
| 23 | A sin Q + B cos Q → H ↵ | | 192 |
| 24 | Plot G , H ↵ | | 197 |
| 25 | C cos Q − D sin Q → I ↵ | | 207 |
| 26 | C sin Q + D cos Q → J ↵ | | 217 |
| 27 | Plot I , J : Line ↵ | | 224 |
| 28 | E cos Q − F sin Q → K ↵ | | 234 |
| 29 | E sin Q + F cos Q → L ↵ | | 244 |
| 30 | Plot K , L : Line ↵ | | 251 |
| 31 | Plot G , H : Line ◢ | | 258 |
| 32 | Cls : Plot C , D : Plot E , F : Goto 1 | | 272 |
| 33 | | | |
| 34 | | Total 272 steps | |
| 35 | | | |
| 36 | | | |

| Program for Rotation of figures | | No. 10 |
|---|---|---|
| Step | Key operation | Display |
| 1 | Prog 0 EXE | Prog 0<br>(X1, Y1)<br>X1=? |
| 2 | 2 EXE<br>0.5 EXE | 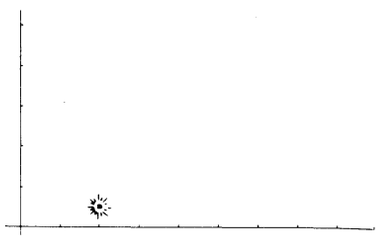 <br>X=2. |
| 3 | EXE | (X1, Y1)<br>X1=?<br>2<br>Y1=?<br>0.5<br>done<br>(X2, Y2)<br>X2=? |
| 4 | 6 EXE<br>0.5 EXE | 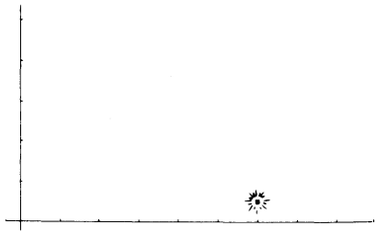 <br>X=6. |



| Program for Rotation of figures | | No. 10 |
|---|---|---|
| Step | Key operation | Display |
| 5 | EXE | (X2, Y2)<br>X2=?<br>6<br>Y2=?<br>0.5<br>done<br>(X3, Y3)<br>X3=? |
| 6 | 4.5 EXE<br>1.5 EXE | 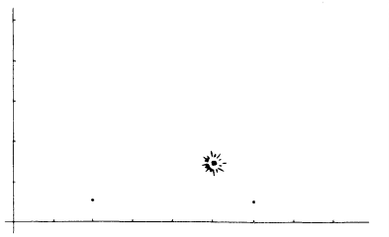 <br>X=4.5 |
| 7 | ▷ ~<br>(Set the value of $x$ to 5.) | 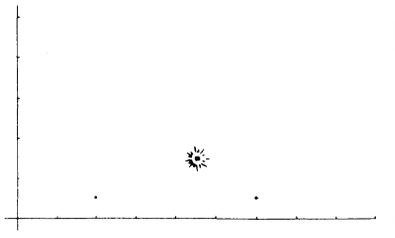 <br>X=5. |
| 8 | EXE | 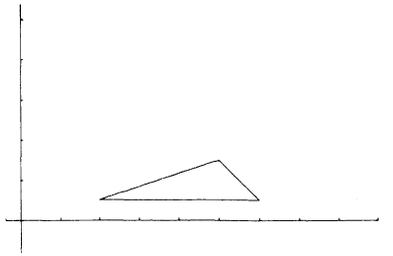 |

| Program for Rotation of figures | | No. 10 |
|---|---|---|
| Step | Key operation | Display |
| 9 | EXE | (X3, Y3)<br>X3=?<br>4.5<br>Y3=?<br>1.5<br>done<br>done<br>ANGLE:Deg? |
| 10 | 45 EXE | 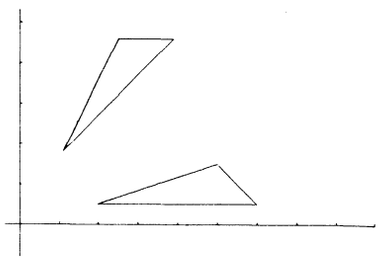 |
| 11 | Repeat above procedure from step 8. | |
| 12 | | |



| Program for Rotation of figures | | No. 10 |
|---|---|---|
| Step | Key operation | Display |
| 13 | | |
| 14 | | |
| 15 | | |
| 16 | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Graph variation by parameters** | **11** |

## Description

Damped vibration

(i) $\varepsilon > n$ (Overdamping)

$P_1 = -\varepsilon + \sqrt{\varepsilon^2 - n^2}$ , $P_2 = -\varepsilon - \sqrt{\varepsilon^2 - n^2}$

$$x = \frac{v_0 - x_0 P_2}{P_1 - P_2} e^{P_1 t} - \frac{v_0 - x_0 P_1}{P_1 - P_2} e^{P_2 t}$$



(ii) $\varepsilon = n$ (Critical damping)

$$x = \{x_0 + (v_0 + \varepsilon x_0)t\} e^{-\varepsilon t}$$



(iii) $\varepsilon < n$ (Damping vibration)

$$x = e^{-\varepsilon t}\left\{x_0 \cos\sqrt{n^2 - \varepsilon^2}\, t + \frac{v_0 + \varepsilon x_0}{\sqrt{n^2 - \varepsilon^2}} \cdot \sin\sqrt{n^2 - \varepsilon^2}\, t\right\}$$



## Example

Draw a graph of the damping vibration that possesses the following parameters:

| (1) | (2) | (3) |
|---|---|---|
| $\varepsilon = 0.1$ | $\varepsilon = 0.2$ | $\varepsilon = 0.2$ |
| $n = 1.5$ | $n = 0.2$ | $n = 0.18$ |
| $x_0 = 2.5$ | $x_0 = 2$ | $x_0 = -2$ |
| $v_0 = 1$ | $v_0 = 0.6$ | $v_0 = 1.5$ |

## Preparation and operation

● Store the program written on the next page.

Memory contents

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| A | $x_0$ | H | | O | | V | | |
| B | $v_0$ | I | | P | $P_1 = -\varepsilon + \sqrt{\varepsilon^2 - n^2}$ | W | | |
| C | $\sqrt{n^2 - \varepsilon^2}$ | J | | Q | $P_2 = -\varepsilon - \sqrt{\varepsilon^2 - n^2}$ | X | $t$ | |
| D | | K | | R | | Y | $x$ | |
| E | $\varepsilon$ | L | | S | | Z | | |
| F | | M | | T | | | | |
| G | | N | $n$ | U | | | | |



No. 11

| Line | Program | Notes | Number of steps |
|---|---|---|---|
| 1 | Rad ↵ | | 2 |
| 2 | Range 0 , 2 5 , 5 , (−) 3 , 3 , 1 ↵ | | 17 |
| 3 | " E P S I L O N = " ? → E ↵ | | 31 |
| 4 | " N = " ? → N ↵ | | 39 |
| 5 | " X 0 = " ? → A ↵ | | 48 |
| 6 | " V 0 = " ? → B ↵ | | 57 |
| 7 | E > N ⇒ Goto 1 ↵ | | 64 |
| 8 | E = N ⇒ Goto 2 ↵ | | 71 |
| 9 | √ ( N $x^2$ − E $x^2$ ) → C ↵ | | 82 |
| 10 | Graph $e^x$ ( (−) E X ) ( A cos ( C X ) + | | 97 |
| 11 | ( B + E A ) C $x^{-1}$ sin ( C X ) ) ↵ | | 112 |
| 12 | Goto 0 ↵ | | 115 |
| 13 | Lbl 1 ↵ | | 118 |
| 14 | (−) E + √ ( E $x^2$ − N $x^2$ ) → P ↵ | | 132 |
| 15 | (−) E − √ ( E $x^2$ − N $x^2$ ) → Q ↵ | | 146 |
| 16 | Graph ( B − A Q ) ( P − Q ) $x^{-1}$ $e^x$ ( | | 161 |
| 17 | P X ) − ( B − A P ) ( P − Q ) | | 176 |
| 18 | $x^{-1}$ $e^x$ ( Q X ) ↵ | | 183 |
| 19 | Goto 0 ↵ | | 186 |
| 20 | Lbl 2 ↵ | | 189 |
| 21 | Graph ( A + ( B + E A ) X ) $e^x$ ( (−) | | 204 |
| 22 | E X ) ↵ | | 208 |
| 23 | Lbl 0 | | 210 |
| 24 | | | |
| 25 | | Total 210 steps | |
| 26 | | | |
| 27 | | | |
| 28 | | | |
| 29 | | | |
| 30 | | | |
| 31 | | | |
| 32 | | | |
| 33 | | | |
| 34 | | | |
| 35 | | | |
| 36 | | | |

| Program for Graph variation by parameters | No. 11 |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| 1 | [Prog] 0 [EXE]<br>0.1 [EXE]<br>1.5 [EXE]<br>2.5 [EXE] | Prog 0<br>EPSILON=?<br>0.1<br>N=?<br>1.5<br>X0=?<br>2.5<br>V0=? |
| 2 | 1 [EXE] | 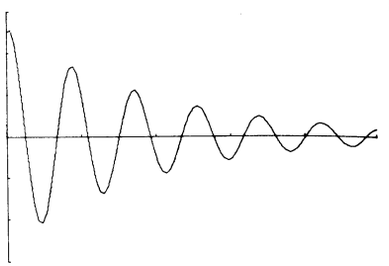 |
| 3 | [Prog] 0 [EXE]<br>0.2 [EXE]<br>0.2 [EXE]<br>2 [EXE] | Prog 0<br>EPSILON=?<br>0.2<br>N=?<br>0.2<br>X0=?<br>2<br>V0=? |
| 4 | 0.6 [EXE] | 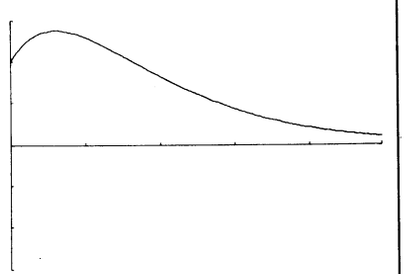 |



| Program for Graph variation by parameters | No. 11 |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| 5 | [Prog] 0 [EXE]<br>0.2 [EXE]<br>0.18 [EXE]<br>[(−)] 2 [EXE] | Prog 0<br>EPSILON=?<br>0.2<br>N=?<br>0.18<br>X0=?<br>−2<br>V0=? |
| 6 | 1.5 [EXE] | 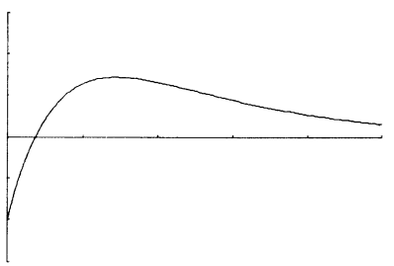 |
| 7 | | |
| 8 | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Hysteresis loop** | 12 |

## Description




When a ferromagnetic specimen is sustained in a magnetic field, the specimen becomes magnetized. The B-H relationship can be represented by a hysteresis curve.



Soft magnetic substance



Ferromagnetic substance

## Example

Hysteresis curve of soft magnetic material

| | 1 | 2 | 3 | 4 | 5 | 6 | 7 | 8 | 9 |
|---|---|---|---|---|---|---|---|---|---|
| H | 0.4 | 1.0 | 2.0 | 3.0 | 4.0 | 2.0 | 1.0 | 0.5 | 0.3 |
| B | 0.5 | 0.86 | 1.2 | 1.32 | 1.4 | 1.31 | 1.22 | 1.13 | 1.1 |

| | 10 | 11 | 12 | 13 | 14 | 15 | 16 | 17 |
|---|---|---|---|---|---|---|---|---|
| H | 0 | −0.3 | −0.5 | −0.8 | −1.0 | −2.0 | −3.0 | −4.0 |
| B | 0.96 | 0.66 | 0 | −0.53 | −0.72 | −1.15 | −1.33 | −1.4 |

- Number of data items: 17
- Number of data items in the main loop: 12

* Within 20 data items.

## Preparation and operation

● Store the program written on the next page.

Memory contents

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| A | Number of data items | H | | O | | V | |
| B | Number of data items in the main loop | I | | P | | W | |
| C | | J | | Q | | X | |
| D | | K | | R | | Y | |
| E | | L | | S | | Z | |
| F | | M | | T | | | Z[1]~Z[20] B |
| G | F[1]~F[20] H | N | | U | | | |



No. 12

| Line | Program | Notes | Number of steps |
|---|---|---|---|
| 1 | Range (−) 4 . 7 , 4 . 7 , 1 , (−) 1 . | | 15 |
| 2 | 5 5 , 1 . 5 5 , 0 . 5 ↵ | | 27 |
| 3 | Defm 2 0 ↵ | | 31 |
| 4 | " N O . SPACE O F SPACE D A T A " ? → | | 46 |
| 5 | A ↵ Lbl 9 ↵ | | 51 |
| 6 | " M A I N SPACE L O O P ↵ | | 62 |
| 7 | N O . SPACE O F SPACE D A T A " ? → B | | 77 |
| 8 | ↵ | | 78 |
| 9 | B > 2 0 ⇒ Goto 9 ↵ | | 86 |
| 10 | 1 → C : Plot 0 , 0 ↵ | | 95 |
| 11 | Lbl 0 : " H = " ? → F [ C ] ↵ | | 109 |
| 12 | " B = " ? → Z [ C ] ↵ | | 120 |
| 13 | Plot F [ C ] , Z [ C ] : Line ◢ | | 133 |
| 14 | C + 1 → C ↵ | | 139 |
| 15 | C ≠ A + 1 ⇒ Goto 0 ↵ | | 148 |
| 16 | A − B + 1 → D ↵ | | 156 |
| 17 | Lbl 1 : Plot (−) F [ D ] , (−) Z [ D ] | | 171 |
| 18 | : Line ↵ | | 174 |
| 19 | D + 1 → D ↵ | | 180 |
| 20 | D ≠ A + 1 ⇒ Goto 1 ↵ | | 189 |
| 21 | " E N D " | | 194 |
| 22 | | | |
| 23 | | | |
| 24 | | Memory 20×8=160 | |
| 25 | | | |
| 26 | | Total 354 steps | |
| 27 | | | |
| 28 | | | |
| 29 | | | |
| 30 | | | |
| 31 | | | |
| 32 | | | |
| 33 | | | |
| 34 | | | |
| 35 | | | |
| 36 | | | |

| Program for Hysteresis loop | No. 12 |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| 1 | Prog 0 EXE | Prog 0<br>NO. OF DATA? |
| 2 | 17 EXE | Prog 0<br>NO. OF DATA?<br>17<br>MAIN LOOP<br>NO. OF DATA? |
| 3 | 12 EXE | Prog 0<br>NO. OF DATA?<br>17<br>MAIN LOOP<br>NO. OF DATA?<br>12<br>H=? |
| 4 | 0.4 EXE<br>0.5 EXE | 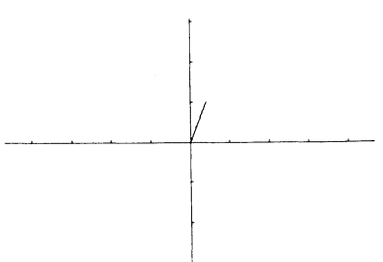 |



| Program for Hysteresis loop | No. 12 |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| 5 | EXE<br>1.0 EXE<br>0.86 EXE | 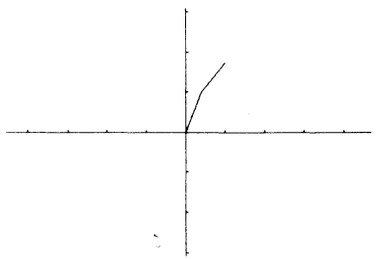 |
| 6 | Input data in order.<br>⋮ | |
| 7 | EXE | −1.33<br>done<br>H=?<br>−4<br>B=?<br>−1.4<br>done<br>END |
| 8 | G↔T | 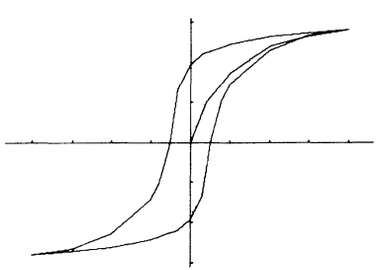 |

**CASIO** PROGRAM SHEET

| Program for | No. |
|---|---|
| **Regression curve** | 13 |

## Description

i Logarithmic regression curve

Regression formula: $y = A + B\ln x$

$$B = \frac{n \cdot \Sigma(y \cdot \ln x) - \Sigma \ln x \cdot \Sigma y}{n\Sigma(\ln x)^2 - (\Sigma \ln x)^2}$$

$$A = \frac{\Sigma y - B \cdot \Sigma \ln x}{n}$$



ii Exponential regression curve

Regression formula: $y = A \cdot e^{Bx}$

$$B = \frac{n\Sigma(x \ln y) - \Sigma x \cdot \Sigma \ln y}{n \cdot \Sigma x^2 - (\Sigma x)^2}$$

$$A = e^{\left(\frac{\Sigma \ln y - B \cdot \Sigma x}{n}\right)}$$



iii Power regression curve

Regression formula: $y = A \cdot x^B$

$$B = \frac{n\Sigma(\ln x \cdot \ln y) - \Sigma \ln x \cdot \Sigma \ln y}{n \cdot \Sigma(\ln x)^2 - (\Sigma \ln x)^2}$$

$$A = \frac{\Sigma \ln y - B \cdot \Sigma \ln x}{n}$$



• See page 176 for an example.

## Preparation and operation

● Store the program written on the next page.

Memory contents

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| A | A or ln A | H | $\Sigma(\ln x)^2$ | O | | V | $\Sigma x$ |
| B | B | I | | P | $\Sigma y^2$ | W | $n$ |
| C | $\Sigma \ln x$ | J | | Q | $\Sigma y$ | X | $x$ data |
| D | $\Sigma \ln y$ | K | | R | $\Sigma xy$ | Y | $y$ data |
| E | $X\Sigma \ln y$ | L | | S | For selection of 1~3 | Z | |
| F | $Y\Sigma \ln x$ | M | | T | | | |
| G | $\Sigma(\ln x \cdot \ln y)$ | N | | U | $\Sigma x^2$ | | |



No. 13

| Line | Program | Notes | Number of steps |
|---|---|---|---|
| 1 | P0 [SHIFT] [MODE] ÷ → LR 2 | | |
| 2 | Scl : Cls : 0 → C ~ H ↵ | | 10 |
| 3 | " Range O K ? " ◢ | | 17 |
| 4 | " D A T A SPACE I N ~ E N D → ↵ | | 31 |
| 5 | A C → Prog 1 SPACE E X E " ↵ | | 42 |
| 6 | Lbl 1 ↵ | | 45 |
| 7 | " X : " ? → X ↵ | | 53 |
| 8 | " Y : " ? → Y ↵ | | 61 |
| 9 | ln X + C → C : ln Y + D → D : X | | 76 |
| 10 | ln Y + E → E : Y ln X + F → F : | | 91 |
| 11 | ln X × ln Y + G → G : ( ln X ) $x^2$ | | 106 |
| 12 | + H → H ↵ | | 111 |
| 13 | X , Y DT ◢ | | 116 |
| 14 | Goto 1 | | 118 |
| 15 | | | |
| 16 | P1 [MODE] + → COMP | | |
| 17 | " Y = A + B ln X SPACE → 1 ↵ | | 12 |
| 18 | Y = A × $e^x$ ( B X ) SPACE → 2 ↵ | | 25 |
| 19 | Y = A × X $x^y$ B SPACE SPACE → 3 ↵ | | 37 |
| 20 | 1 ~ 3 : " ? → S ↵ | | 46 |
| 21 | S = 1 ⇒ Prog 7 ↵ | | 53 |
| 22 | S = 2 ⇒ Prog 8 ↵ | | 60 |
| 23 | S = 3 ⇒ Prog 9 ↵ | | 67 |
| 24 | " E N D " | | 72 |
| 25 | | | |
| 26 | P7 [SHIFT] [MODE] ÷ → LR 2 | | |
| 27 | ( W F − C Q ) ( W H − C $x^2$ ) $x^{-1}$ | | 15 |
| 28 | → B : ( Q − B C ) W $x^{-1}$ → A ↵ | | 29 |
| 29 | Graph A + B ln X ◢ | | 36 |
| 30 | " A : " ◢ A ◢ | | 43 |
| 31 | " B : " ◢ B ◢ | | 50 |
| 32 | | | |
| 33 | | | |
| 34 | | | |
| 35 | | | |
| 36 | | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| **Regression curve** | **13** |

## Example

Perform exponential regression of the following data:

| | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| $x$ i | 2.2 | 5.6 | 9.5 | 13.8 | 18.0 | 23.2 | 29.9 | 37.8 |
| $y$ i | 35.6 | 28.1 | 23.0 | 17.9 | 12.9 | 10.2 | 6.2 | 4.0 |

Draw an exponential regression curve, and use the trace function to estimate the value for $y$ when X = 20. Also, obtain the values of A and B of the regression formula.

Range values:

X min : −10 Y min : −10
X max : 50 Y max : 55
X scl : 10 Y scl : 10

## Preparation and operation

● Store the program written on the next page.

| Memory contents | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| A | | H | | O | | V | | |
| B | | I | | P | | W | | |
| C | | J | | Q | | X | | |
| D | | K | | R | | Y | | |
| E | | L | | S | | Z | | |
| F | | M | | T | | | | |
| G | | N | | U | | | | |



No. 13

| Line | MODE 2 Program | | | | | | | | | | | | | | Notes | Number of steps |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| 1 | P8 | SHIFT | MODE | ÷ | → | LR | 2 | | | | | | | | | |
| 2 | ( | W | E | − | V | D | ) | ( | W | U | − | V | $x^2$ | ) | $x^{-1}$ | 15 |
| 3 | → | B | : | ( | D | − | B | V | ) | W | $x^{-1}$ | → | A | ↵ | | 29 |
| 4 | Graph | $e^x$ | A | × | $e^x$ | B | X | ◢ | | | | | | | | 37 |
| 5 | " | A | : | " | ◢ | $e^x$ | A | ◢ | | | | | | | | 45 |
| 6 | " | B | : | " | ◢ | B | ◢ | | | | | | | | | 52 |
| 7 | | | | | | | | | | | | | | | | |
| 8 | P9 | SHIFT | MODE | ÷ | → | LR | 2 | | | | | | | | | |
| 9 | ( | W | G | − | C | D | ) | ( | W | H | − | C | $x^2$ | ) | $x^{-1}$ | 15 |
| 10 | → | B | : | ( | D | − | B | C | ) | W | $x^{-1}$ | → | A | ↵ | | 29 |
| 11 | Graph | $e^x$ | A | × | X | $x^y$ | B | ◢ | | | | | | | | 37 |
| 12 | " | A | : | " | ◢ | $e^x$ | A | ◢ | | | | | | | | 45 |
| 13 | " | B | : | " | ◢ | B | ◢ | | | | | | | | | 52 |
| 14 | | | | | | | | | | | | | | | | |
| 15 | | | | | | | | | | | | | | | Total 344 steps | |
| 16 | | | | | | | | | | | | | | | | |
| 17 | | | | | | | | | | | | | | | | |
| 18 | | | | | | | | | | | | | | | | |
| 19 | | | | | | | | | | | | | | | | |
| 20 | | | | | | | | | | | | | | | | |
| 21 | | | | | | | | | | | | | | | | |
| 22 | | | | | | | | | | | | | | | | |
| 23 | | | | | | | | | | | | | | | | |
| 24 | | | | | | | | | | | | | | | | |
| 25 | | | | | | | | | | | | | | | | |
| 26 | | | | | | | | | | | | | | | | |
| 27 | | | | | | | | | | | | | | | | |
| 28 | | | | | | | | | | | | | | | | |
| 29 | | | | | | | | | | | | | | | | |
| 30 | | | | | | | | | | | | | | | | |
| 31 | | | | | | | | | | | | | | | | |
| 32 | | | | | | | | | | | | | | | | |
| 33 | | | | | | | | | | | | | | | | |
| 34 | | | | | | | | | | | | | | | | |
| 35 | | | | | | | | | | | | | | | | |
| 36 | | | | | | | | | | | | | | | | |

| Program for Regression curve | No. 13 |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| 1 | [Prog] 0 [EXE]<br>(Range setting check) | Prog 0<br>Range OK?<br>– Disp – |
| 2 | Set range values.<br>[Range]<br>[(–)] 10 [EXE]<br>50 [EXE]<br>10 [EXE]<br>[(–)] 10 [EXE]<br>55 [EXE]<br>10 | Range<br>Xmin:–10<br>max:50<br>scl:10<br>Ymin:–10<br>max:55<br>scl:10_ |
| 3 | [EXE]<br>[EXE]<br>After data input is complete, press the [AC] key and execute the program in Prog 1. | Prog 0<br>Range OK?<br>DATA IN ~END→<br>AC→Prog 1 EXE<br>X:? |
| 4 | 2.2 [EXE]<br>35.6 [EXE] | DATA IN ~END→<br>AC→Prog 1 EXE<br>X:?<br>2.2<br>Y:?<br>35.6<br>2.2<br>– Disp – |



| Program for Regression curve | No. 13 |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| 5 | [EXE] | DATA IN ~END→<br>AC→Prog 1 EXE<br>X:?<br>2.2<br>Y:?<br>35.6<br>2.2<br>X:? |
| 6 | Input data in order.<br>⋮ | |
| 7 | 4.0 [EXE] | 6.2<br>29.9<br>X:?<br>37.8<br>Y:?<br>4.0<br>37.8<br>– Disp – |
| 8 | [G↔T] | 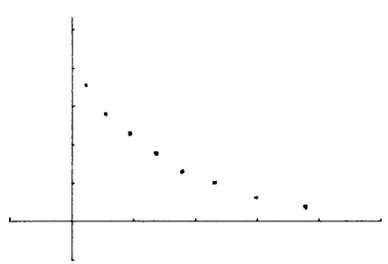 |

| Program for Regression curve | No. 13 |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| 9 | [AC]<br>[Prog] 1 [EXE] | Prog 1<br>Y=A+B ln X →1<br>Y=A×e(BX) →2<br>Y=A×X^y B →3<br>1~3 : ? |
| 10 | 2 [EXE]<br>(Select exponential regression). | 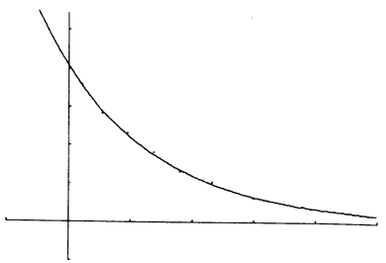 |
| 11 | [Trace] | 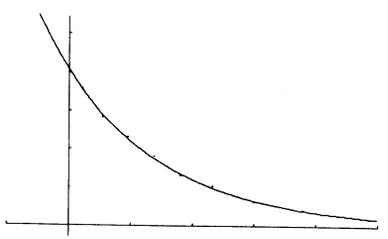 <br>X=−4.893617021 |
| 12 | [▷] ~<br>Move pointer to X=20 | 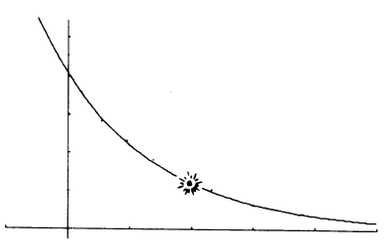 <br>X=20. |



| Program for Regression curve | No. 13 |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| 13 | [SHIFT] [X⟷Y] | 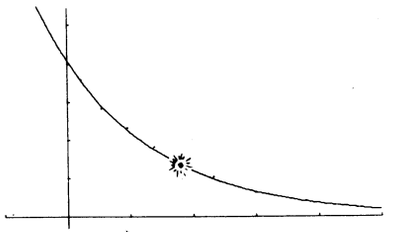 <br>Y=11.86149086 |
| 14 | [EXE]<br>[EXE] | Y=A×e(BX) →2<br>Y=A×X^y B →3<br>1~3 : ?<br>2<br>done<br>A :<br>40.68214077<br>— Disp — |
| 15 | [EXE]<br>[EXE] | 1~3 : ?<br>2<br>done<br>A :<br>40.68214077<br>B :<br>−0.06162460519<br>— Disp — |
| 16 | [EXE] | 1~3 : ?<br>2<br>done<br>A :<br>40.68214077<br>B :<br>−0.06162460519<br>END |

# CASIO PROGRAM SHEET

| Program for | Parade diagram | No. | 14 |
|---|---|---|---|

## Description

One example of a parade diagram application is problem solving in QC activities. The problem is quantitatively analyzed based on actual data concerning its extent, and the main points demanding attention are determined.

Horizontal axis : Problem classification
(Item 6 in this example)

Vertical axis : (Right) Occupation ratio
(Left) Problem extent in each classification

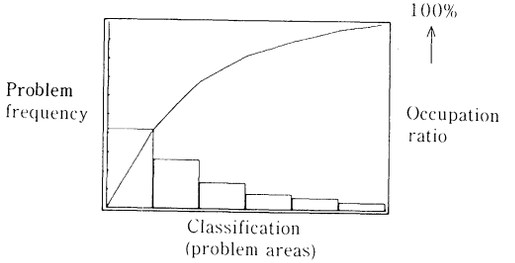


## Example

Create a parade diagram using the data on the right.

| Problem areas | Frequency |
|---|---|
| A | 105 |
| B | 65 |
| C | 35 |
| D | 20 |
| E | 15 |
| Others | 10 |

## Preparation and operation

● Store the program written on the next page.

Memory contents

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| A | Input data | H | | O | | V | |
| B | | I | | P | | W | $n$ |
| C | | J | | Q | | X | Count of data |
| D | | K | | R | | Y | |
| E | | L | | S | Display count | Z | Sum of data |
| F | | M | | T | | | Z[1]~Z[6] |
| G | | N | | U | | | |



No. 14

| Line | Program | Notes | Number of steps |
|---|---|---|---|
| 1 | PØ [SHIFT] [MODE] [X] → SD2 ↵ | | 7 |
| 2 | Scl : Mcl : Defm 6 ↵ | | 22 |
| 3 | Range Ø , 6 , 1 , Ø , 5 Ø Ø , 5 Ø | | 23 |
| 4 | ↵ | | 26 |
| 5 | Lbl 1 ↵ | | 36 |
| 6 | " D A T A " ? → A ↵ | | 41 |
| 7 | X ; A DT ↵ | | 54 |
| 8 | X + 1 → X : X ≤ 5 ⇒ Goto 1 ↵ | | 66 |
| 9 | Range , , , , W , W ÷ 1 Ø ↵ | | 68 |
| 10 | Graph ◢ | | 73 |
| 11 | Plot Ø , Ø ↵ | | 77 |
| 12 | 1 → S ↵ | | 80 |
| 13 | Lbl 2 ↵ | | 89 |
| 14 | Z [ S ] + Z → Z ↵ | | 96 |
| 15 | Plot S , Z : Line ↵ | | 109 |
| 16 | S + 1 → S : S ≤ 6 ⇒ Goto 2 ↵ | | 111 |
| 17 | Graph W | | |
| 18 | | | |
| 19 | | Memory 6×8=48 | |
| 20 | | | |
| 21 | | Total 159 steps | |
| 22 | | | |
| 23 | | | |
| 24 | | | |
| 25 | | | |
| 26 | | | |
| 27 | | | |
| 28 | | | |
| 29 | | | |
| 30 | | | |
| 31 | | | |
| 32 | | | |
| 33 | | | |
| 34 | | | |
| 35 | | | |
| 36 | | | |

| Program for Parade diagram | | No. 14 |
|---|---|---|
| Step | Key operation | Display |
| 1 | Prog 0 EXE | Prog 0<br>DATA? |
| 2 | 105 EXE | Prog 0<br>DATA?<br>105<br>DATA? |
| 3 | 65 EXE | Prog 0<br>DATA?<br>105<br>DATA?<br>65<br>DATA? |
| 4 | Input data in order.<br>⋮ | |



| Program for Parade diagram | | No. 14 |
|---|---|---|
| Step | Key operation | Display |
| 5 | 10 EXE<br>(Bar graph display) | 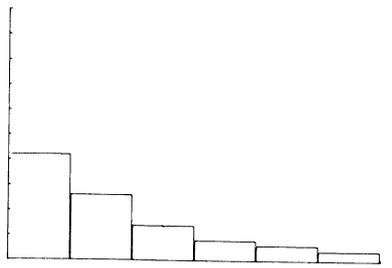 |
| 6 | EXE<br>(Parade diagram display) | 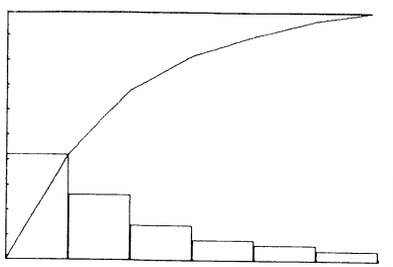 |
| 7 | | |
| 8 | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| | |

Description

Example

Preparation and operation

| Step | Key operation | Display | Step | Key operation | Display |
|---|---|---|---|---|---|
| 1 | | | 11 | | |
| 2 | | | 12 | | |
| 3 | | | 13 | | |
| 4 | | | 14 | | |
| 5 | | | 15 | | |
| 6 | | | 16 | | |
| 7 | | | 17 | | |
| 8 | | | 18 | | |
| 9 | | | 19 | | |
| 10 | | | 20 | | |



No.

| Line | MODE 2 Program | Notes | Number of steps |
|---|---|---|---|
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |
| 9 | | | |
| 10 | | | |
| 11 | | | |
| 12 | | | |
| 13 | | | |
| 14 | | | |
| 15 | | | |
| 16 | | | |
| 17 | | | |
| 18 | | | |
| 19 | | | |
| 20 | | | |
| 21 | | | |
| 22 | | | |
| 23 | | | |
| 24 | | | |
| 25 | | | |
| 26 | | | |
| 27 | | | |
| 28 | | | |

| Memory contents | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | A | | H | | O | | V | |
| | B | | I | | P | | W | |
| | C | | J | | Q | | X | |
| | D | | K | | R | | Y | |
| | E | | L | | S | | Z | |
| | F | | M | | T | | | |
| | G | | N | | U | | | |

# CASIO PROGRAM SHEET

| Program for | No. |
|---|---|
| | |

**Example**

**Preparation and operation**

| Memory contents | | | | | | | | |
|---|---|---|---|---|---|---|---|---|
| | A | | H | | O | | V | |
| | B | | I | | P | | W | |
| | C | | J | | Q | | X | |
| | D | | K | | R | | Y | |
| | E | | L | | S | | Z | |
| | F | | M | | T | | | |
| | G | | N | | U | | | |



No.

| Line | MODE 2 Program | Notes | Number of steps |
|---|---|---|---|
| 1 | | | |
| 2 | | | |
| 3 | | | |
| 4 | | | |
| 5 | | | |
| 6 | | | |
| 7 | | | |
| 8 | | | |
| 9 | | | |
| 10 | | | |
| 11 | | | |
| 12 | | | |
| 13 | | | |
| 14 | | | |
| 15 | | | |
| 16 | | | |
| 17 | | | |
| 18 | | | |
| 19 | | | |
| 20 | | | |
| 21 | | | |
| 22 | | | |
| 23 | | | |
| 24 | | | |
| 25 | | | |
| 26 | | | |
| 27 | | | |
| 28 | | | |
| 29 | | | |
| 30 | | | |
| 31 | | | |
| 32 | | | |
| 33 | | | |
| 34 | | | |
| 35 | | | |
| 36 | | | |

| Program for | No. |
|---|---|

| Step | Key operation | Display |
|---|---|---|
| | | |
| | | |
| | | |
| | | |



# REFERENCE MATERIAL

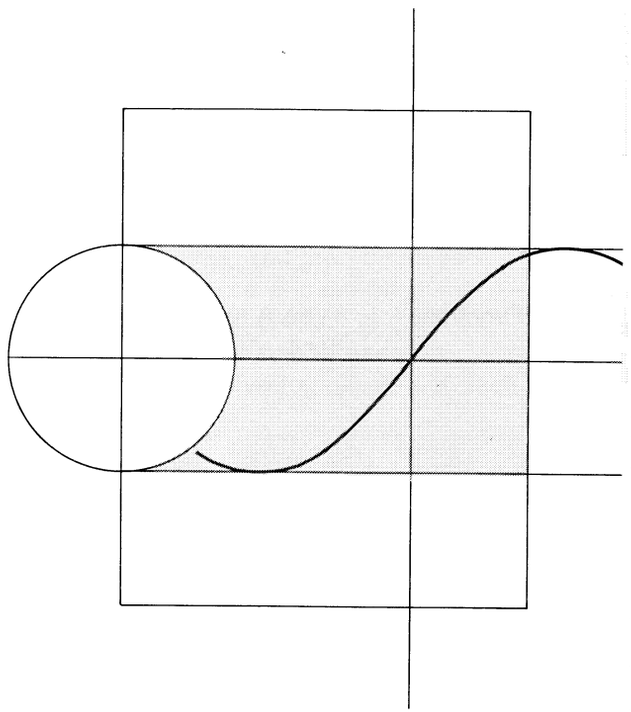

## ■ Manual computations

| | | |
|---|---|---|
| Mode specification | COMP mode ( MODE ⊞ ) | Four arithmetic computations and function computations. |
| | Base-n mode ( MODE ⊟ ) | Binary, octal, decimal, hexadecimal conversions and computations, logical operations. |
| | SD1 mode ( MODE ⊠ ) | Standard deviation computations (1-variable statistical computations). |
| | LR1 mode ( MODE ÷ ) | Regression computations (paired variable statistical computations). |
| | SD2 mode ( SHIFT MODE ⊠ ) | For production of single variable statistical graphs. (Bar graphs, line graphs, normal distribution curves) |
| | LR2 mode ( SHIFT MODE ÷ ) | For production of paired variable statistical graphs. (Regression lines) |
| Functions | Type A functions | Function command input immediately before numeric value.<br>(sin, cos, tan, $\sin^{-1}$, $\cos^{-1}$, $\tan^{-1}$, sinh, cosh, tanh, $\sinh^{-1}$, $\cosh^{-1}$, $\tanh^{-1}$, log, ln, $e^x$, $10^x$, $\sqrt{\ }$, $\sqrt[3]{\ }$, Abs, Int, Frac) |
| | Type B functions | Function command input immediately after numeric value.<br>[$x^2$, $x^{-1}$, $x!$] |
| | Paired variable functions | Function command input between two numeric values. Numeric value enclosed in parentheses input immediately after function command.<br>(A $x^y$ B (A to the Bth power),<br>B $\sqrt[x]{\ }$ A (A to the 1/Bth power),<br>Pol (A,B), Rec (A,B))<br>** A and B are numeric values.* |
| | Immediately executed functions | Displayed value changed with each press of a key.<br>[ENG, ENG, °′″] |



| | | |
|---|---|---|
| Binary, octal, decimal, hexadecimal computations | Setting number system | Decimal ····· Dec EXE ( Dec = $\sqrt{\ }$ )<br>Hexadecimal ·· Hex EXE ( Hex = $x^2$ )<br>Binary ····· Bin EXE ( Bin = log )<br>Octal ····· Oct EXE ( Oct = ln ) |
| | Number system specification | Number system for the numeric value entered immediately after can be specified regardless of the currently set number system.<br>To specify:<br>Decimal ····· SHIFT d ( d = $\sqrt{\ }$ )<br>Hexadecimal ····· SHIFT h ( h = $x^2$ )<br>Binary ····· SHIFT b ( b = log )<br>Octal ····· SHIFT o ( o = ln ) |
| | Logical operations | A input numeric value converted to binary and each bit computed. Result converted back to number system used for input, and then displayed.<br>Not ..... Reverse of each bit<br>and ..... Logical product of each bit<br>or ..... Logical sum of each bit<br>xor ..... Exclusive logical sum of each bit |
| Standard deviation computations | Data clear | SHIFT Scl EXE ( Scl = AC ) |
| | Data input | Data [;frequency] DT ( DT = $\sqrt{\ }$ )<br>** Frequency can be omitted.* |
| | Data deletion | Data [;frequency] CL ( CL = $x^y$ )<br>** Frequency can be omitted.* |
| | Result display | Number of data ( $n$ )<br>····· ALPHA $n$ EXE ( $n$ = 3 )<br>Sum ($\Sigma x$) ····· ALPHA $\Sigma x$ EXE ( $\Sigma x$ = 2 )<br>Sum of squares ($\Sigma x^2$)<br>····· ALPHA $\Sigma x^2$ EXE ( $\Sigma x^2$ = 1 )<br>Mean ($\bar{x}$) ····· SHIFT $\bar{x}$ EXE ( $\bar{x}$ = 1 )<br>Population standard deviation ($x\sigma_n$)<br>····· SHIFT $x\sigma_n$ EXE ( $x\sigma_n$ = 2 )<br>Sample standard deviation ($x\sigma_{n-1}$)<br>····· SHIFT $x\sigma_{n-1}$ EXE ( $x\sigma_{n-1}$ = 3 ) |

| | | |
|---|---|---|
| Regression computations | Data clear | [SHIFT] [Scl] [EXE] ( [Scl] = [AC] ) |
| | Data input | $x$ data, $y$ data [; frequency] [DT]<br>( [DT] = [$\sqrt{x}$] )<br>* *Frequency can be omitted.* |
| | Data deletion | $x$ data, $y$ data [;frequency] [CL]<br>( [CL] = [$x^y$] )<br>* *Frequency can be omitted.* |
| | Result display | Number of data ($n$)<br>····· [ALPHA] [$n$] [EXE] ( [$n$] = [3] )<br>Sum of $x$ ($\Sigma x$)<br>····· [ALPHA] [$\Sigma x$] [EXE] ( [$\Sigma x$] = [2] )<br>Sum of $y$ ($\Sigma y$)<br>····· [ALPHA] [$\Sigma y$] [EXE] ( [$\Sigma y$] = [5] )<br>Sum of squares of $x$ ($\Sigma x^2$)<br>····· [ALPHA] [$\Sigma x^2$] [EXE] ( [$\Sigma x^2$] = [1] )<br>Sum of squares of $y$ ($\Sigma y^2$)<br>····· [ALPHA] [$\Sigma y^2$] [EXE] ( [$\Sigma y^2$] = [4] )<br>Sum of products of $x$ and $y$ ($\Sigma xy$)<br>····· [ALPHA] [$\Sigma xy$] [EXE] ( [$\Sigma xy$] = [6] )<br>Mean of $x$ ($\bar{x}$) ···· [SHIFT] [$\bar{x}$] [EXE] ( [$\bar{x}$] = [1] )<br>Mean of $y$ ($\bar{y}$) ···· [SHIFT] [$\bar{y}$] [EXE] ( [$\bar{y}$] = [4] )<br>Population standard deviation of $x$<br>($x\sigma_n$) ····· [SHIFT] [$x\sigma_n$] [EXE] ( [$x\sigma_n$] = [2] )<br>Population standard deviation of $y$<br>($y\sigma_n$) ····· [SHIFT] [$y\sigma_n$] [EXE] ( [$y\sigma_n$] = [5] )<br>Sample standard deviation of $x$<br>($x\sigma_{n-1}$) ····· [SHIFT] [$x\sigma_{n-1}$] [EXE] ( [$x\sigma_{n-1}$] = [3] )<br>Sample standard deviation of $y$<br>($y\sigma_{n-1}$) ····· [SHIFT] [$y\sigma_{n-1}$] [EXE] ( [$y\sigma_{n-1}$] = [6] )<br>Constant term of regression formula<br>(A) ····· [SHIFT] [A] [EXE] ( [A] = [7] )<br>Regression coefficient (B)<br>····· [SHIFT] [B] [EXE] ( [B] = [8] )<br>Correlation coefficient (r)<br>····· [SHIFT] [$r$] [EXE] ( [$r$] = [9] )<br>Estimated value of $x$ ($\hat{x}$)<br>····· $y$ data [SHIFT] [$\hat{x}$] [EXE] ( [$\hat{x}$] = [×] )<br>Estimated value of $y$ ($\hat{y}$)<br>····· $x$ data [SHIFT] [$\hat{y}$] [EXE] ( [$\hat{y}$] = [÷] ) |



| | | |
|---|---|---|
| Special functions | Ans function | The latest result obtained in manual or program computations is stored in memory. It is recalled by pressing [Ans].<br>* *Mantissa of numeric value is 10 digits.* |
| | Replay function | • After computation results are obtained, the computation formula can be recalled by pressing either [◁] or [▷].<br>• If an error is generated, pressing either [◁] or [▷] will cancel the error and the point where the error was generated will be indicated by a blinking cursor. |
| | Multistatement function | Colons are used to join a series of statements or computation formulas. If joined using "◢", the computation result to that point is displayed. |
| | Memory expansion | The Number of memories can be expanded from the standard 26. Memories can be expanded in units of one up to 500 (for a total of 526). Eight steps are required for one memory expansion.<br>[MODE] [·] number of memories to be expanded [EXE]. |

| | | |
|---|---|---|
| Graph function | Range function | Graph range settings<br>Xmax...Maximum value of $x$<br>Xmin...Minimum value of $x$<br>Xscl...Scale of X-axis (space between points)<br>Ymax...Maximum value of $y$<br>Ymin...Minimum value of $y$<br>Yscl...Scale of Y-axis (space between points) |
| | Trace function | Moves pointer (blinking dot) on graph. $x$-$y$ coordinates can be read. |
| | Plot function | Marks pointer (blinking dot) at any coordinate on the graph display. |
| | Line function | Connects with a straight line two points created with plot function. |
| | Factor function | Magnifies or reduces a graph using pointer (blinking dot) as center. |



## ■ Program computations

| | | |
|---|---|---|
| Program input | Input mode | WRT mode ( MODE 2 ) |
| | Computation mode | Mode that conforms with program specified by: MODE +, MODE −, MODE ×, MODE ÷. |
| | Program area specification | Cursor is moved to the desired program area number (P0 through P9) using ◁ and ▷, and EXE is pressed. |
| Program execution | Execution mode | RUN mode ( MODE 1 ) |
| | Program area specification | Execution starts with Prog program area No. EXE.<br>Program area No.: 0~9 |
| Program editing | Input mode | WRT mode ( MODE 2 ) |
| | Program area specification | Cursor is moved to the desired program area number (P0 through P9) using ◁ or ▷, and EXE are pressed. |
| | Editing | Cursor is moved to position to be edited using ◁, ▷, △ or ▽.<br>• Press correct key for corrections.<br>• Press DEL for deletions.<br>• Press INS to specify insert mode for insertion. |
| Program erasing | Erase mode | PCL mode ( MODE 3 ) |
| | Erasing a program in a single program area | Cusor is moved to the desired program area number (P0 through P9) using ◁ and ▷, and AC is pressed. |
| | Erasing the programs in all program areas | Press SHIFT Mcl (Mcl = DEL). |

| | | |
|---|---|---|
| Program commands | Unconditional jump | Program execution jumps to the Lbl $n$ which corresponds to Goto $n$.<br>* *$n$ = 0 through 9* |
| | Conditional jumps | If conditional expression is true, the statement after "⇒" is executed. If not true, execution jumps to the statement following next "↵", " : " or "◢".<br>  <br><br>(F): Formula<br>(R): Relational operator<br>(S): Statement<br>* *The relational operator is:*<br>=, ≠, >, <, ≥, ≤. |
| | Count jumps | The value in a memory is increased or decreased. If the value does not equal 0, the next statement is executed. If it is 0, a jump is performed to the statement following the next "↵", " : " or "◢".<br>Increase<br>  <br><br>Decrease<br>  <br><br>(S): Statement<br>(V): Value in memory |
| | Subroutines | Program execution jumps from main routine to subroutine indicated by Prog $n$ ($n$ = 0 through 9). After execution of the subroutine, execution returns to the point following Prog $n$ in the original program area. |



## ■ Error messages

| Message | Meaning | Countermeasure |
|---|---|---|
| Syn ERROR | ①Computation formula contains an error.<br>②Formula in a program contains an error. | ①Use [◁] or [▷] to display the point where the error was generated and correct it.<br>②Use [◁] or [▷] to display the point where the error was generated, press [AC] and then correct the program in the WRT mode. |
| Ma ERROR | ①Computation result exceeds computation range.<br>②Computation is performed outside the input range of a function.<br>③Illogical operation (division by zero, etc.) | ① ② ③<br>Check the input numeric value and correct it. When using memories, check that the numeric values stored in memories are correct. |
| Go ERROR | ①No corresponding Lbl $n$ to Goto $n$.<br>②No program stored in program area P $n$ which corresponds to Prog $n$. | ①Correctly input a Lbl $n$ to correspond to the Goto $n$, or delete the Goto $n$ if not required.<br>②Store a program in program area P $n$ to correspond to Prog $n$, or delete the Prog $n$ if not required. |
| Ne ERROR | • Nesting of subroutines by Prog $n$ exceeds 10 levels. | • Ensure that Prog $n$ is not used to return from subroutines to main routine. If used, delete any unnecessary Prog $n$.<br>• Trace the subroutine jump destinations and ensure that no jumps are made back to the original program area. Ensure that returns are made correctly. |

| | | |
|---|---|---|
| Stk ERROR | • Execution of computations that exceed the capacity of the stack for numeric values or stack for computations. | • Simplify the formulas to keep stacks within 8 levels for the numeric values and 20 levels for the computations.<br>• Divide the formula into two or more parts. |
| Mem ERROR | • Attempt to use a memory such as Z[5] when no memory has been expanded. | • Expand memories using MODE ⊡ (Defm).<br>• Use memories within the current number of memories. |
| Arg ERROR | Incorrect argument specification for a command that requires an argument. | Correct the argument.<br>• Sci $n$, Fix $n$: $n$= natural number from 0 through 9.<br>• Goto $n$, Lbl $n$, Prog $n$: $n$ = natural number from 0 through 9.<br>• Defm $n$: $n$ = natural number between 0 to the number of remaining steps. |



## ■ Input range of functions (general principles)

| Function name | Input range |
|---|---|
| $\sin x$, $\cos x$, $\tan x$ | $\|x\| \leqq 9\times10^{9}$ degree<br>$\|x\| \leqq 5\times10^{7}\ \pi$ rad<br>$\|x\| < 10^{10}$gra |
| $\sin^{-1}x$, $\cos^{-1}x$ | $\|x\| \leqq 1$ |
| $\tan^{-1}x$ | $\|x\| < 10^{100}$ |
| $e^{x}$ | $-10^{100} < x \leqq 230.2585092$ |
| $\sinh x$, $\cosh x$ | $\|x\| \leqq 230.2585092$ |
| $\tanh x$ | $\|x\| < 10^{100}$ |
| $\sinh^{-1}x$ | $\|x\| < 5\times10^{99}$ |
| $\cosh^{-1}x$ | $1 \leqq x < 5\times10^{99}$ |
| $\tanh^{-1}x$ | $\|x\| < 1$ |
| $\log x$, $\ln x$ | $10^{-99} \leqq x < 10^{100}$ |
| $10^{x}$ | $-10^{100} < x < 100$ |
| $\sqrt{x}$ | $0 \leqq x < 10^{100}$ |
| $x^{2}$ | $\|x\| < 10^{50}$ |
| $x^{-1}$ ($1/x$) | $\|x\| < 10^{100}$, $x \neq 0$ |
| $\sqrt[3]{x}$ | $\|x\| < 10^{100}$ |
| $x!$ | $0 \leqq x \leqq 69$ ($x$ is an integer.) |
| $x^{y}$ | When $x<0$, $y=n$, $1/2n+1$ ($n$ is an integer)<br>$x=0 \rightarrow y>0$<br>When $x>0$, $-10^{100} < y\log x < 100$ |
| $\sqrt[y]{x}$ ($x^{1/y}$) | $x \geqq 0$, $y \neq 0$ |
| Pol ($x$, $y$) | $\sqrt{x^{2}+y^{2}} < 10^{100}$ |
| Rec ($r$, $\theta$) | $\|r\| < 10^{100}$, $\|\theta\| \leqq 9\times10^{9}$ degree<br>$\|\theta\| \leqq 5\times10^{7}\ \pi$ rad<br>$\|\theta\| < 10^{10}$gra |

| | |
|---|---|
| Binary number | (Positive) 111111111111111 $\geqq x \geqq 0$<br>(Negative) 1111111111111111 $\geqq x \geqq$ 1000000000000000 |
| Octal number | (Positive) 17777777777 $\geqq x \geqq 0$<br>(Negative) 37777777777 $\geqq x \geqq$ 20000000000 |
| Hexadecimal number | (Positive) 7 FFFFFFF $\geqq x \geqq 0$<br>(Negative) FFFFFFFF $\geqq x \geqq$ 80000000 |
| Decimal→ sexagesimal | $\lvert x \rvert \leqq$ 9999999. 999. If degrees,minutes and seconds exceed a total of 11 digits, the higher (degrees, minutes) values will be given priority, and displayed in 11 digits. |
| Statistical computation | $\lvert x \rvert < 10^{50}$, $\lvert y \rvert < 10^{50}$, $\lvert n \rvert < 10^{100}$ |

* As a rule, the accuracy of a result is ±1 at the 10th digit.
* Errors may be cumulative with such internal continuous computations with the functions, $x^y$, $x^{1/y}$, $x!$, $\sqrt[3]{x}$, and accuracy is sometimes affected.
* In $\tan x$, $\lvert x \rvert \neq 90° \times (2n+1)$, $\lvert x \rvert \neq \pi/2\text{rad} \times (2n+1)$, $\lvert x \rvert \neq 100\text{ gra}\ (2n+1)$, ($n$ is an integer.)
* With $\sinh x$ and $\tanh x$, when $x = 0$, errors are cumulative and accuracy is affected.



## SPECIFICATIONS

Model: fx-7500G

*Computations*

**Basic computation functions:** Negative numbers, exponents, parenthetical addition/subtraction/multiplication/division(with priority sequence judgement function—true algebraic logic).

**Built-in functions:** Trigonometric/inverse trigonometric functions (units of angular measurement: degrees, radians, grads), hyperbolic/inverse hyperbolic functions, logarithmic/exponential functions, reciprocals, factorials, square roots, cube roots, powers, roots, squares, decimal-sexagesimal conversions, binary-octal-hexadecimal conversions/computations, coordinate transformations, $\pi$, random numbers, absolute values, integers, fractions.

**Statistical computation functions:** Standard deviation—number of data, sum, sum of squares, mean, standard deviation (two types). Linear regression—number of data, sum of $x$, sum of $y$, sum of squares of $y$, sum of squares of $x$, mean of $x$, mean of $y$, standard deviation of $x$ (two types), standard deviation of $y$ (two types), constant term, regression coefficient, correlation coefficient, estimated value of $x$, estimated value of $y$.

**Memories:** 26 standard (526 maximum)

**Computation range:** $\pm 1 \times 10^{-99} \sim \pm 9.999999999 \times 10^{99}$ and 0.
Internal operation uses 13-digit mantissa.

**Rounding:** Performed according to the specified number of significant digits or the number of specified decimal places.

### *Programs*

**Number of steps:** 4,006 maximum

**Jump function:** Unconditional jump (Goto), 10 maximum
Conditional jump ($=$, $\neq$, $>$, $<$, $\geqq$, $\leqq$)
Count jumps (Isz, Dsz)

**Subroutines:** 9 levels

**Number of stored programs:** 10 maximum (P0 to P9)

**Check function:** Program checking, debugging, deletion, addition, etc.

### *Graph function*

**Built-in function graphs:** (20 types) sin, cos, tan, $\sin^{-1}$, $\cos^{-1}$, $\tan^{-1}$, sinh, cosh, tanh, $\sinh^{-1}$, $\cosh^{-1}$, $\tanh^{-1}$, log, ln, $10^x$, $e^x$, $x^2$, $\sqrt{\ }$, $\sqrt[3]{\ }$, $x^{-1}$

**Graph commands:** Graph, Range, Plot, Trace, Factor, Line, X⟷Y

**Graphs:** User generated functions, statistical graphs (bar graphs, line graphs, normal distribution curves, regression lines), Instant Factor

### *Common section*

**Power supply:** Three lithium batteries (CR2025)

**Power consumption:** 0.06 W

**Battery life:** Approximately 70 hours on type CR2025.

**Auto power off:** Power is automatically switched off approximately 6 minutes after last operation.

**Ambient temperature range:** 0°C—40°C(32°F—104°F)

**Dimensions:** Unfolded: 7H × 126W × 145mmD
($^1/_4$"H × 5"W × $5^3/_4$"D)
Folded: 14H × 126W × 74mmD
($^1/_2$"H × 5"W × $2^7/_8$"D)

**Weight:** 140 g (4.9 oz) icluding batteries